(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
8 February 2001 (08.02.2001)

PCT

(10) International Publication Number
WO 01/09960 A1

(51) International Patent Classification[7]: H01L 31/113, 27/146

(21) International Application Number: PCT/JP00/05104

(22) International Filing Date: 28 July 2000 (28.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/218316	2 August 1999 (02.08.1999)	JP
2000/107468	10 April 2000 (10.04.2000)	JP
2000/122157	24 April 2000 (24.04.2000)	JP
2000/163303	31 May 2000 (31.05.2000)	JP

(71) Applicant: CASIO COMPUTER CO., LTD. [JP/JP]; 6-2, Hon-machi 1-chome, Shibuya-ku, Tokyo 151-8543 (JP).

(72) Inventors: SASAKI, Kazuhiro; 6-1-12, Asamizodai, Sagamihara-shi, Kanagawa 228-0828 (JP). SASAKI, Makoto; 2-19-11-302, Daimachi, Hachioji-shi, Tokyo 193-0931 (JP). KOSHIZUKA, Yasuo; 1448-1-221, Kumagawa, Fussa-shi, Tokyo 197-0003 (JP).

(74) Agents: SUZUYE, Takehiko et al.; Suzuye & Suzuye, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).


(81) Designated States *(national)*: AU, CA, CN, IN, KR, NO, SG.

(84) Designated States *(regional)*: Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, ES, FI, FR, GB, IT, NL, SE).

Published:
— *With international search report.*
— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PHOTOSENSOR AND PHOTOSENSOR SYSTEM

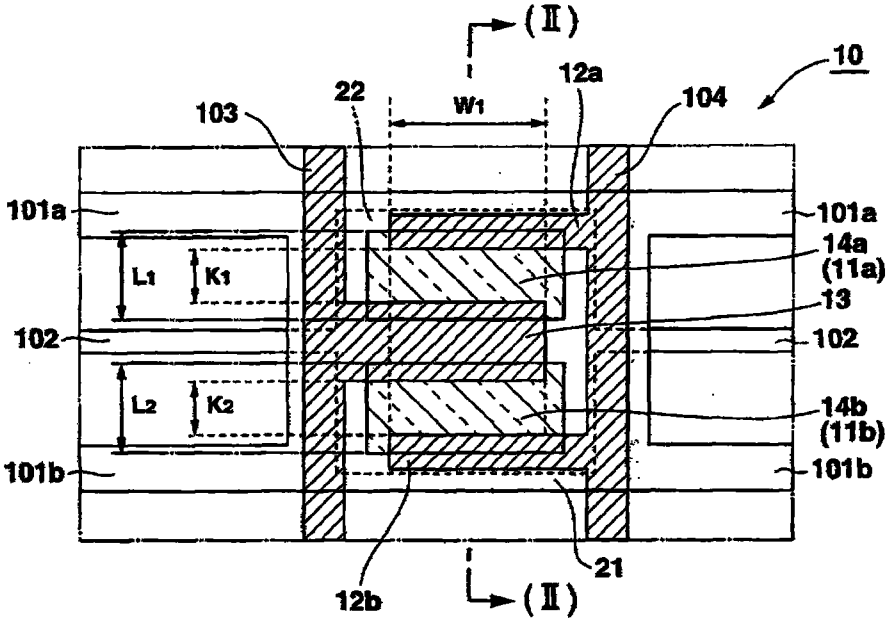

(57) Abstract: Since the photosensor array is provided with one or more semiconductor layers having carrier generating regions for generating carrier by incident exciting light, the positions of the carrier generating regions can be set arbitrarily so as to equalize the balance of incident light in the direction of two-dimensional travel, which enables sensing with less distortion.

WO 01/09960 A1