(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number
WO 2002/069625 A1

(51) International Patent Classification[7]: H04N 5/262, 5/268

(21) International Application Number: PCT/US2002/005192

(22) International Filing Date: 21 February 2002 (21.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/270,935 21 February 2001 (21.02.2001) US
10/081,543 20 February 2002 (20.02.2002) US

(71) Applicant: CREATION TECHNOLOGIES, LLC [US/US]; Suite M, 1310 Commerce Street, Petaluma, CA 94954 (US).

(72) Inventor: DUDKOWSKI, Edmond, Louis; 3020 Bridgeway, #279, Sausalito, CA 94965 (US).

(74) Agent: DAVIS, Valerie, M.; Coudert Brothers LLP, 3rd Floor, 600 Beach Street, San Francisco, CA 94109-1312 (US).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

[Continued on next page]

(54) Title: PORTABLE SYSTEM FOR LIVE TELEVISION SIGNAL EDITING

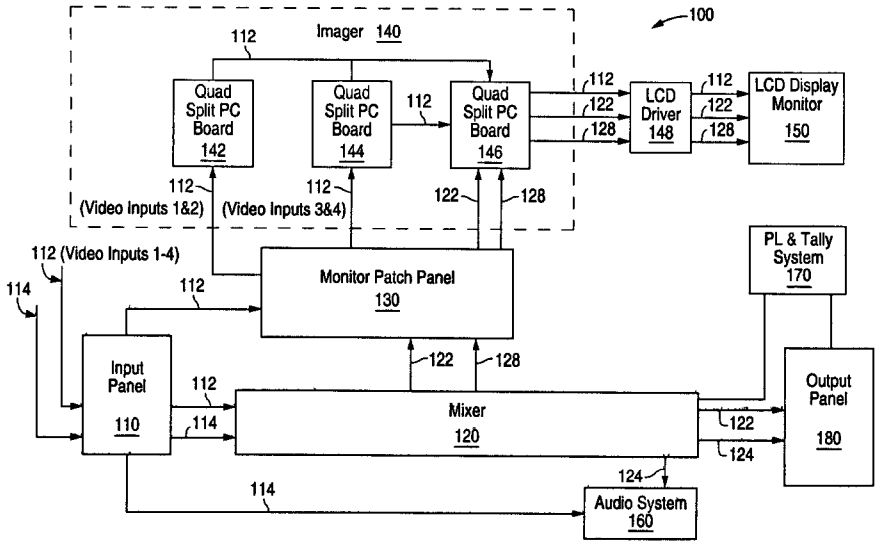

(57) Abstract: A system and method for editing live television signals. This system includes: a plurality of input connectors (112, 114, 110) for receiving separate input video signals, and an output connector (122, 124, 180); a mixer (120) for generating at the output connector a real-time output video signal (122) derived from at least one of the input (112) video signals; a single display monitor (150) for simultaneously displaying each of the input video signals and the output video signal; and an imager (140) coupled between the mixer (120) and the display monitor (150) for causing at least three images to be displayed on the display monitor (150) in a split-screen format, the at least three images corresponding to the input (112) video signals and the output (122) video signal. The system is enclosed in a portable suitcase housing.

WO 2002/069625 A1

(48) Date of publication of this corrected version:
27 May 2004

(15) Information about Correction:
see PCT Gazette No. 22/2004 of 27 May 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.