


### ABSTRACT OF THE DISCLOSURE

A lubricating composition comprising a major amount of base oil and a minor amount of an additive package, wherein the additive package comprises


(A) a friction modifier component selected from:

(a) one or more a reaction products of an alcohol with a compound of the formula IV:

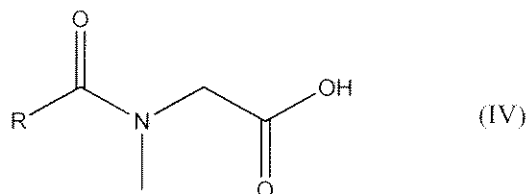


wherein R is a linear or branched, saturated, unsaturated, or partially saturated hydrocarbyl group having about 8 to about 22 carbon atoms; and

(b) one or more compounds of the Formulae II-III:

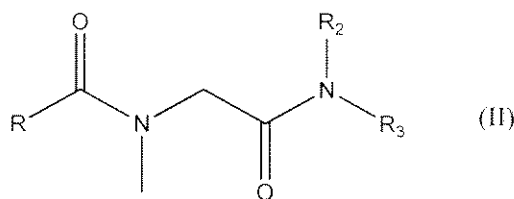

wherein R is a linear or branched, saturated, unsaturated, or partially saturated hydrocarbyl having about 8 to about 22 carbon atoms and R<sub>2</sub> and R<sub>3</sub> are independently selected from hydrogen, C<sub>1</sub>-C<sub>18</sub> hydrocarbyl groups, and C<sub>1</sub>-C<sub>18</sub> hydrocarbyl groups containing one or more heteroatoms; and

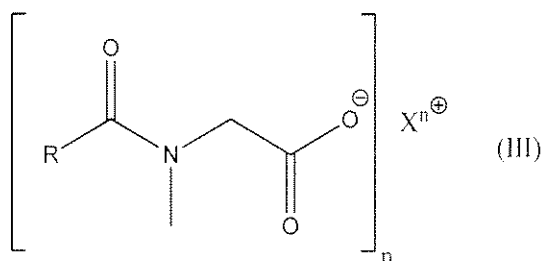

wherein R is a linear or branched, saturated, unsaturated, or partially saturated hydrocarbyl having about 8 to about 22 carbon atoms; and X is an alkali metal, alkaline earth metal or ammonium cation and n is the valence of cation X; and

(B) at least one dispersant.