



(51) International Patent Classification:
H04W 24/10 (2009.01)

(21) International Application Number:
PCT/CN2023/082223

(22) International Filing Date:
17 March 2023 (17.03.2023)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/320,919 17 March 2022 (17.03.2022) US
18/120,695 13 March 2023 (13.03.2023) US

(71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building, Bantian, Long-
gang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventors: **SUH, Jung Hoon**; Suite 400, 303 Terry
Fox Drive, Kanata, Ottawa, Ontario 231 (CA). **ABOUL-
MAGD, Osama**; Suite 400, 303 Terry Fox Drive, Kanata,
Ottawa, Ontario 231 (CA). **XIN, Yan**; Suite 400, 303 Terry
Fox Drive, Kanata, Ottawa, Ontario 231 (CA). **AU, Kwok**

Shum; Suite 400, 303 Terry Fox Drive, Kanata, Ottawa,
Ontario 231 (CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: RESOURCE UNIT ALLOCATION FOR TRIGGER BASED SENSING MEASUREMENT INSTANCES AND CHAN-
NEL STATE INFORMATION FEEDBACK SUPPORT IDENTIFIER

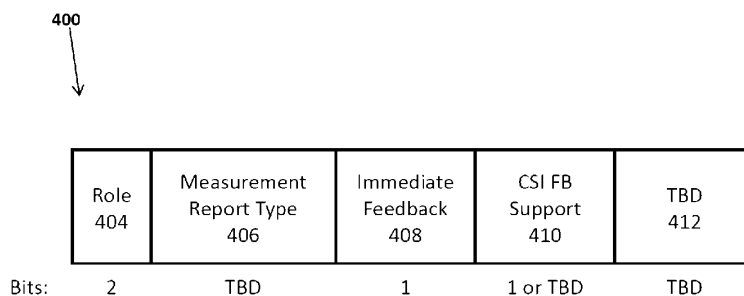


FIG. 4

(57) Abstract: There are provided methods and apparatus related to setting up sensing measurement instances and to allocating resource units (RUs) between sensing responders in a sensing measurement instance. There is provided a channel state information (CSI) feed-back (FB) support subfield can be provided in a sensing measurement parameters field, which may be used to allow a device to indicate whether it can compute CSI FB information and feedback. There is further provided, RU allocation re-use across multiple phases of a sensing phase which may enable later trigger frames to omit RU allocation information. There are further provided responder-to-initiator (R2I) null data packets (NDPs) which include information indicative of the device transmitting the packet in a signal (SIG) field of the NDP.

[Continued on next page]

Published:

— with international search report (Art. 21(3))