

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
24 January 2013 (24.01.2013)



(10) International Publication Number
WO 2013/010234 A8

(51) International Patent Classification:
F04B 35/04 (2006.01) *F16F 1/32* (2006.01)
F04B 39/10 (2006.01)

(21) International Application Number:
PCT/BR2012/000209

(22) International Filing Date:
21 June 2012 (21.06.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI1103447-5 19 July 2011 (19.07.2011) BR

(71) Applicant (for all designated States except US): **WHIRL-
POOL S.A.** [BR/BR]; Avenida das Nações Unidas, N°
12.995, 32° andar, Brooklin Novo, 04578-000, São Paulo,
SP (BR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROMAN, Alisson
Luiz** [BR/BR]; Rua Higino Aguiar, 225, Apto. 101, Costa
e Silva, 89219-320 Joinville, SC (BR). **TAKEMORI, Cel-
so Kenzo** [BR/BR]; Rua Oscar A. Schneider, 140, Apto.
302, Atiradores, 89203-040 Joinville - SC (BR).
VOLLRATH, Ingwald [BR/BR]; Rua Olavo Bilac, 85,
Pirabeiraba, 89239-100 Joinville - SC (BR). **COUTO,
Paulo Rogerio Carrara** [BR/BR]; Rua Des. Tavares
Sobrinho, 326, Boa Vista, 89206-500 Joinville, SC (BR).

(74) Agent: **RODRIGUES, Carina S.**; Daniel Advogados, Rua
Joaquim Floriano, 413, 13° andar, Itaim Bibi, 04534-011
São Paulo, SP (BR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

[Continued on next page]

(54) Title: LEAF SPRING AND COMPRESSOR WITH LEAF SPRING

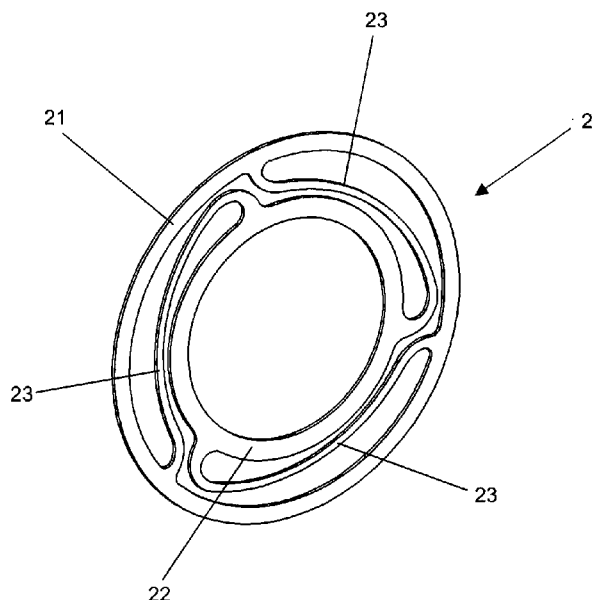


FIG. 1

(57) Abstract: The present invention relates to compressor leaf springs, in particular, linear compressor leaf springs; the leaf springs comprising at least one spacer (3) disposed between at least a pair of flat springs (2), each flat spring (2) being comprised by at least one outer ring (21), at least one inner ring (22) and at least one connection extension (23) which connects an outer rim (21) to an inner ring (22); According to the present invention, it is defined at least one section of physical contact between at least a pair of outer rims (21) defined by at least one spacer (3), at least one section of physical contact between at least a pair of inner rims (22) defined by at least one spacer (3), and at least one free section of physical contact between at least two connection extensions (23) adjacently arranged.



HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(48) Date of publication of this corrected version:

27 February 2014

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

(15) Information about Correction:

see Notice of 27 February 2014