2003046232

01 SEP 2003

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number
WO 02/070627 A3

(51) International Patent Classification[7]: C10G 65/12, 65/04

(21) International Application Number: PCT/EP02/02451

(22) International Filing Date: 5 March 2002 (05.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01400563.1 5 March 2001 (05.03.2001) EP

(71) Applicant *(for all designated States except US)*: **SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: **GERMAINE, Gilbert, Robert, Bernard** [FR/FR]; Route Departmentale n° 3, F-76650 Petit Couronne (FR).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

(88) Date of publication of the international search report:
6 February 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS TO PREPARE A LUBRICATING BASE OIL AND A GAS OIL

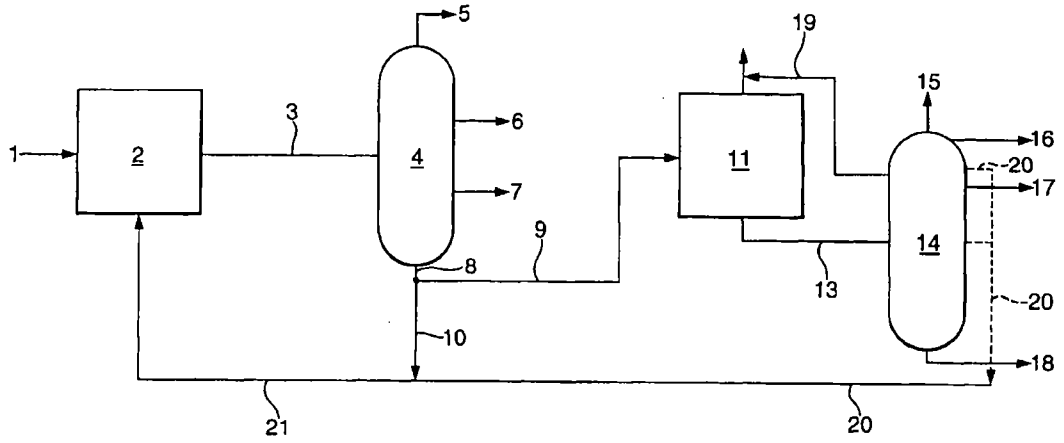

(57) Abstract: Process to prepare two or more lubricating base oil grades and a gas oil by (a) hydrocracking/hydroisomerisating a Fischer-Tropsch product, wherein weight ratio of compounds having at least 60 or more carbon atoms and compounds having at least 30 carbon atoms in the Fischer-Tropsch product is at least 0.2 and wherein at least 30 wt% of compounds in the Fischer-Tropsch product have at least 30 carbon atoms, (b) separating the product of step (a) into one or more gas oil fractions and a base oil precursor fraction, (c) performing a pour point reducing step to the base oil precursor fraction obtained in step (b), and (d) separating the effluent of step (c) in two or more base oil grades.

WO 02/070627 A3

ACTION