

TITLE OF INVENTION

1,1,1,2,2,3,3,4,4-NONAFLUORO-4-METHOXYBUTANE REFRIGERANT
COMPOSITIONS COMPRISING FUNCTIONALIZED ORGANIC
COMPOUNDS AND USES THEREOF

5

CROSS REFERENCE(S) TO RELATED APPLICATION(S)

This application claims the priority benefit of U.S. Provisional
Application 60/584,785, filed June 29, 2004.

10

BACKGROUND OF THE INVENTION

1. Field of the Invention.

The present invention relates to compositions for use in
refrigeration and air-conditioning systems comprising 1,1,1,2,2,3,3,4,4-
nonafluoro-4-methoxybutane and at least one chlorocarbon, alcohol,
15 ether, ester, N-(difluoromethyl)-N,N-dimethylamine, or mixtures thereof.
Further, the present invention relates to compositions for use in
refrigeration and air-conditioning systems employing a centrifugal
compressor comprising 1,1,1,2,2,3,3,4,4-nonafluoro-4-methoxybutane
and at least one chlorocarbon, alcohol, ether, ester, N-(difluoromethyl)-
20 N,N-dimethylamine, or mixtures thereof. The compositions of the present
invention may be azeotropic or near-azeotropic and are useful in
processes for producing cooling or heat or as heat transfer fluids.

2. Description of Related Art.

25 The refrigeration industry has been working for the past few
decades to find replacement refrigerants for the ozone depleting
chlorofluorocarbons (CFCs) and hydrochlorofluorocarbons (HCFCs) being
phased out as a result of the Montreal Protocol. The solution for most
refrigerant producers has been the commercialization of
30 hydrofluorocarbon (HFC) refrigerants. The new HFC refrigerants, HFC-
134a being the most widely used at this time, have zero ozone depletion
potential and thus are not affected by the current regulatory phase out as
a result of the Montreal Protocol.

Further environmental regulations may ultimately cause global
35 phase out of certain HFC refrigerants. Currently, the automobile industry
is facing regulations relating to global warming potential for refrigerants
used in mobile air-conditioning. Therefore, there is a great current need

to identify new refrigerants with reduced global warming potential for the automobile air-conditioning market. Should the regulations be more broadly applied in the future, an even greater need will be felt for refrigerants that can be used in all areas of the refrigeration and air-conditioning industry.

Currently proposed replacement refrigerants for HFC-134a include HFC-152a, pure hydrocarbons such as butane or propane, or "natural" refrigerants such as CO₂ or ammonia. Many of these suggested replacements are toxic and/or flammable. Therefore, new alternatives are constantly being sought.

The object of the present invention is to provide novel refrigerant compositions and heat transfer fluids that provide unique characteristics to meet the demands of low or zero ozone depletion potential and lower global warming potential as compared to current refrigerants.

BRIEF SUMMARY OF THE INVENTION

The present invention relates refrigerant or heat transfer fluid compositions comprising C₄F₉OCH₃ and at least one compound selected from the group consisting of:

N-(difluoromethyl)-N,N-dimethylamine;
diisopropyl ether;
dimethoxymethane;
ethyl acetate;
ethyl formate;
methanol;
methyl acetate;
methyl formate;
tert-butyl methyl ether;
trans-1,2-dichloroethylene; and
C₄F₉OC₂H₅ and trans-1,2-dichloroethylene.

The present invention further relates to the above listed compositions specifically for use in refrigeration or air-conditioning systems employing a centrifugal compressor; a multi-stage or a 2-stage centrifugal compressor; or a single pass/single slab heat exchanger.

The present invention further relates to azeotropic or near-azeotropic refrigerant compositions. These compositions are useful in

refrigeration or air-conditioning systems. The compositions are also useful in refrigeration or air-conditioning systems employing a centrifugal compressor.

- 5 The present invention further relates to processes for producing refrigeration, heat, and transfer of heat from a heat source to a heat sink using the present inventive compositions.

DETAILED DESCRIPTION OF THE INVENTION

- 10 The refrigerant compositions of the present invention comprise $C_4F_9OCH_3$ and at least one chlorocarbon, alcohol, ether, ester, N-(difluoromethyl)-N,N-dimethylamine, or mixtures thereof.

Representative components of the present inventive compositions such as, chlorocarbons, alcohols, ethers, and esters are listed in Table 1.

15

TABLE 1

<u>Compound</u>	<u>Chemical Formula</u>	<u>Chemical Name</u>	<u>CAS Reg. No.</u>
$C_4F_9OCH_3$ (mixture of isomers)	$CF_3CF_2CF_2CF_2OCH_3$	1,1,1,2,2,3,3,4,4-nonafluoro-4-methoxybutane	163702-07-6
	$(CF_3)_2CFCF_2OCH_3$	2-(difluoromethoxymethyl)-1,1,1,2,3,3,3-heptafluoropropane	163702-08-7
$C_4F_9OC_2H_5$ (mixture of isomers)	$CF_3CF_2CF_2CF_2OC_2H_5$	1-ethoxy-1,1,2,2,3,3,4,4,4-nonafluorobutane	163702-05-4
	$(CF_3)_2CFCF_2OC_2H_5$	2-(ethoxydifluoromethyl)-1,1,1,2,3,3,3-heptafluoropropane	163702-06-5
trans-DCE	$CHCl=CHCl$	trans-1,2-dichloroethylene	156-60-5
	$CH_3OC(CH_3)_3$	tert-butyl methyl ether	1634-04-4
	$(CH_3)_2CHOCH(CH_3)_2$	diisopropyl ether	108-20-3
	$CH_3OCH_2OCH_3$	dimethoxymethane	109-87-5
	CH_3OH	methanol	67-56-1
	$CH_3COOCH_2CH_3$	ethyl acetate	141-78-6
	$HCOOCH_2CH_3$	ethyl formate	109-94-4
	CH_3COOCH_3	methyl acetate	79-20-9
	$HCOOCH_3$	methyl formate	107-31-3
	$N(CH_3)_2(CHF_2)$	N-(difluoromethyl)-N,N-dimethylamine	683-81-8

- 20 The compounds listed in Table 1 are available commercially or may be prepared by processes known in the art. $C_4F_9OCH_3$ and $C_4F_9OC_2H_5$ are both mixtures of isomers as indicated in Table 1 and are available commercially.

The compositions of the present invention that are mixtures may be prepared by any convenient method to combine the desired amounts of the individual components. A preferred method is to weigh the

desired component amounts and thereafter combine the components in an appropriate vessel. Agitation may be used, if desired.

Compositions of the present invention have zero or low ozone depletion potential and low global warming potential. For example,
5 $C_4F_9OCH_3$, alone or in mixtures will have global warming potentials lower than many HFC refrigerants currently in use.

The refrigerant or heat transfer compositions of the present invention include compositions comprising $C_4F_9OCH_3$ and at least one compound selected from the group consisting of:

- 10 N-(difluoromethyl)-N,N-dimethylamine;
- diisopropyl ether;
- dimethoxymethane;
- ethyl acetate;
- ethyl formate;
- 15 methanol;
- methyl acetate;
- methyl formate;
- tert-butyl methyl ether;
- trans-1,2-dichloroethylene; and
- 20 $C_4F_9OC_2H_5$ and trans-1,2-dichloroethylene.

The refrigerant or heat transfer compositions of the present invention may be azeotropic or near-azeotropic compositions. An azeotropic composition is a liquid admixture of two or more substances that has a constant boiling point that may be above or below the boiling
25 points of the individual components. As such an azeotropic composition will not fractionate within the refrigeration or air-conditioning system during operation, which may reduce efficiency of the system. Additionally, an azeotropic composition will not fractionate upon leakage from the refrigeration or air-conditioning system. In the situation where one
30 component of a mixture is flammable, fractionation during leakage could lead to a flammable composition either within the system or outside of the system.

A near-azeotropic composition, also sometimes called a "azeotropic-like composition," is a substantially constant boiling liquid
35 admixture of two or more substances that behaves essentially as a single substance. One way to characterize a near-azeotropic composition is that the vapor produced by partial evaporation or distillation of the liquid has

substantially the same composition as the liquid from which it was evaporated or distilled, that is, the admixture distills/refluxes without substantial composition change. Another way to characterize a near-azeotropic composition is that the bubble point vapor pressure and the dew point vapor pressure of the composition at a particular temperature are substantially the same. Herein, a composition is near-azeotropic if, after 50 weight percent of the composition is removed, such as by evaporation or boiling off, the difference in vapor pressure between the original composition and the composition remaining after 50 weight percent of the original composition has been removed is less than about 10 percent.

The azeotropic refrigerant compositions of the present invention are listed in Table 2.

TABLE 2

<u>Component A</u>	<u>Component B</u>	<u>Azeotrope</u>		<u>Azeotrope</u>
		<u>Concentration</u>		<u>BP (°C)</u>
		<u>Wt% A</u>	<u>Wt% B</u>	
C ₄ F ₉ OCH ₃	N(CH ₃) ₂ (CHF ₂)	41.1	58.9	47.5
C ₄ F ₉ OCH ₃	diisopropyl ether	75.5	24.5	54.2
C ₄ F ₉ OCH ₃	dimethoxymethane	56.3	43.7	42.0
C ₄ F ₉ OCH ₃	ethyl acetate	87.8	12.2	57.9
C ₄ F ₉ OCH ₃	ethyl formate	68.6	31.4	41.0
C ₄ F ₉ OCH ₃	methanol	97.1	2.9	58.7
C ₄ F ₉ OCH ₃	methyl acetate	72.1	27.9	42.5
C ₄ F ₉ OCH ₃	methyl formate	57.4	42.6	26.0
C ₄ F ₉ OCH ₃	tert-butyl methyl ether	66.6	33.4	52.1
C ₄ F ₉ OCH ₃	trans-DCE	54.6	45.4	41.0

The near-azeotropic refrigerant compositions and concentration ranges of the present invention are listed in Table 3.

TABLE 3

<u>Compounds (A/B)</u>	<u>Near-azeotropic Concentration</u>
	<u>Range</u>
	<u>wt% A/wt% B</u>
C ₄ F ₉ OCH ₃ / N(CH ₃) ₂ (CHF ₂)	1-99/99-1
C ₄ F ₉ OCH ₃ / diisopropyl ether	45-99/55-1
C ₄ F ₉ OCH ₃ / dimethoxymethane	1-84/99-16
C ₄ F ₉ OCH ₃ / ethyl acetate	58-99/42-1
C ₄ F ₉ OCH ₃ / ethyl formate	46-86/54-14
C ₄ F ₉ OCH ₃ / methanol	1-99/99-1
C ₄ F ₉ OCH ₃ / methyl acetate	49-87/51-13

C ₄ F ₉ OCH ₃ / methyl formate	37-83/63-17
C ₄ F ₉ OCH ₃ / tert-butyl methyl ether	1-99/99-1
C ₄ F ₉ OCH ₃ / trans-DCE	24-79/76-21
C ₄ F ₉ OCH ₃ /C ₄ F ₉ OC ₂ H ₅ / trans-DCE	10-70/5-60/25-80

Additional compounds from the list in Table 1 may be added to the binary compositions of the present invention to form ternary or higher order compositions. For example, a near-azeotropic composition comprising about 10 weight percent to about 70 weight percent C₄F₉OCH₃, about 5 weight percent to about 60 weight percent C₄F₉OC₂H₅ and about 25 weight percent to about 80 weight percent trans-1,2-dichloroethylene may be formed at 50 °C (see last entry of Table 3).

The compositions of the present invention may further comprise about 0.01 weight percent to about 5 weight percent of a stabilizer, free radical scavenger or antioxidant. Such additives include but are not limited to, nitromethane, hindered phenols, hydroxylamines, thiols, phosphites, or lactones. Single additives or combinations may be used.

The compositions of the present invention may further comprise about 0.01 weight percent to about 5 weight percent of a water scavenger (drying compound). Such water scavengers may comprise ortho esters such as trimethyl-, triethyl-, or tripropylorthoformate.

The compositions of the present invention may further comprise an ultra-violet (UV) dye and optionally a solubilizing agent. The UV dye is a useful component for detecting leaks of the refrigerant and heat transfer fluid compositions by permitting one to observe the fluorescence of the dye in the refrigerant or heat transfer fluid compositions at a leak point or in the vicinity of refrigeration or air-conditioning apparatus. One may observe the fluorescence of the dye under an ultra-violet light. Solubilizing agents may be needed to increase solubility of such UV dyes in some refrigerants and heat transfer fluids.

By "ultra-violet" dye is meant a UV fluorescent composition that absorbs light in the ultra-violet or "near" ultra-violet region of the electromagnetic spectrum. The fluorescence produced by the UV fluorescent dye under illumination by a UV light that emits radiation with

wavelength anywhere from 10 nanometer to 750 nanometer may be detected. Therefore, if refrigerant or heat transfer fluid containing such a UV fluorescent dye is leaking from a given point in a refrigeration or air-conditioning apparatus, the fluorescence can be detected at the leak point.

- 5 Such UV fluorescent dyes include but are not limited to naphthalimides, perylenes, coumarins, anthracenes, phenanthracenes, xanthenes, thioxanthenes, naphthoxanthenes, fluoresceins, and derivatives or combinations thereof. Solubilizing agents of the present invention comprise at least one compound selected from the group consisting of
- 10 hydrocarbons, hydrocarbon ethers, polyoxyalkylene glycol ethers, amides, nitriles, chlorocarbons, esters, lactones, aryl ethers, fluoroethers and 1,1,1-trifluoroalkanes.

- Hydrocarbon solubilizing agents of the present invention comprise hydrocarbons including straight chained, branched chain or
- 15 cyclic alkanes or alkenes containing 16 or fewer carbon atoms and only hydrogen with no other functional groups. Representative hydrocarbon solubilizing agents comprise propane, propylene, cyclopropane, n-butane, isobutane, n-pentane, octane, decane, and hexadecane.

- Hydrocarbon ether solubilizing agents of the present invention
- 20 comprise ethers containing only carbon, hydrogen and oxygen, such as dimethyl ether (DME).

- Polyoxyalkylene glycol ether solubilizing agents of the present invention are represented by the formula $R^1[(OR^2)_xOR^3]_y$, wherein x is an integer from 1-3; y is an integer from 1-4; R^1 is selected from hydrogen
- 25 and aliphatic hydrocarbon radicals having 1 to 6 carbon atoms and y bonding sites; R^2 is selected from aliphatic hydrocarbylene radicals having from 2 to 4 carbon atoms; R^3 is selected from hydrogen, and aliphatic and alicyclic hydrocarbon radicals having from 1 to 6 carbon atoms; at least one of R^1 and R^3 is selected from said hydrocarbon radical; and wherein
- 30 said polyoxyalkylene glycol ethers have a molecular weight of from about 100 to about 300 atomic mass units. As used herein, bonding sites mean

radical sites available to form covalent bonds with other radicals.

Hydrocarbylene radicals mean divalent hydrocarbon radicals.

In the present invention, preferable polyoxyalkylene glycol ether solubilizing agents are represented by $R^1[(OR^2)_xOR^3]_y$, wherein x is preferably 1-2; y is preferably 1; R^1 and R^3 are preferably independently selected from hydrogen and aliphatic hydrocarbon radicals having 1 to 4 carbon atoms; R^2 is preferably selected from aliphatic hydrocarbylene radicals having from 2 or 3 carbon atoms, most preferably 3 carbon atoms; the polyoxyalkylene glycol ether molecular weight is preferably from about 100 to about 250 atomic mass units, most preferably from about 125 to about 250 atomic mass units. The R^1 and R^3 hydrocarbon radicals having 1 to 6 carbon atoms may be linear, branched or cyclic. Representative R^1 and R^3 hydrocarbon radicals include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, and cyclohexyl. Where free hydroxyl radicals on the present polyoxyalkylene glycol ether solubilizing agents may be incompatible with certain compression refrigeration apparatus materials of construction (e.g. Mylar®), R^1 and R^3 are preferably aliphatic hydrocarbon radicals having 1 to 4 carbon atoms, most preferably 1 carbon atom. The R^2 aliphatic hydrocarbylene radicals having from 2 to 4 carbon atoms form repeating oxyalkylene radicals - $(OR^2)_x$ - that include oxyethylene radicals, oxypropylene radicals, and oxybutylene radicals. The oxyalkylene radical comprising R^2 in one polyoxyalkylene glycol ether solubilizing agent molecule may be the same, or one molecule may contain different R^2 oxyalkylene groups. The present polyoxyalkylene glycol ether solubilizing agents preferably comprise at least one oxypropylene radical. Where R^1 is an aliphatic or alicyclic hydrocarbon radical having 1 to 6 carbon atoms and y bonding sites, the radical may be linear, branched or cyclic. Representative R^1 aliphatic hydrocarbon radicals having two bonding sites include, for example, an ethylene radical, a propylene radical, a butylene radical, a pentylene radical, a hexylene radical, a cyclopentylene radical and a cyclohexylene radical. Representative R^1 aliphatic hydrocarbon

radicals having three or four bonding sites include residues derived from polyalcohols, such as trimethylolpropane, glycerin, pentaerythritol, 1,2,3-trihydroxycyclohexane and 1,3,5-trihydroxycyclohexane, by removing their hydroxyl radicals.

- 5 Representative polyoxyalkylene glycol ether solubilizing agents include but are not limited to: $\text{CH}_3\text{OCH}_2\text{CH}(\text{CH}_3)\text{O}(\text{H or CH}_3)$ (propylene glycol methyl (or dimethyl) ether), $\text{CH}_3\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or CH}_3)$ (dipropylene glycol methyl (or dimethyl) ether), $\text{CH}_3\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or CH}_3)$ (tripropylene glycol methyl (or dimethyl) ether),
- 10 $\text{C}_2\text{H}_5\text{OCH}_2\text{CH}(\text{CH}_3)\text{O}(\text{H or C}_2\text{H}_5)$ (propylene glycol ethyl (or diethyl) ether), $\text{C}_2\text{H}_5\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or C}_2\text{H}_5)$ (dipropylene glycol ethyl (or diethyl) ether), $\text{C}_2\text{H}_5\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or C}_2\text{H}_5)$ (tripropylene glycol ethyl (or diethyl) ether), $\text{C}_3\text{H}_7\text{OCH}_2\text{CH}(\text{CH}_3)\text{O}(\text{H or C}_3\text{H}_7)$ (propylene glycol n-propyl (or di-n-propyl) ether), $\text{C}_3\text{H}_7\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or C}_3\text{H}_7)$ (dipropylene glycol n-propyl (or di-n-propyl) ether), $\text{C}_3\text{H}_7\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or C}_3\text{H}_7)$ (tripropylene glycol n-propyl (or di-n-propyl) ether), $\text{C}_4\text{H}_9\text{OCH}_2\text{CH}(\text{CH}_3)\text{OH}$ (propylene glycol n-butyl ether), $\text{C}_4\text{H}_9\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or C}_4\text{H}_9)$ (dipropylene glycol n-butyl (or di-n-butyl) ether), $\text{C}_4\text{H}_9\text{O}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or C}_4\text{H}_9)$ (tripropylene glycol n-butyl (or di-n-butyl) ether),
- 15 $(\text{CH}_3)_3\text{COCH}_2\text{CH}(\text{CH}_3)\text{OH}$ (propylene glycol t-butyl ether), $(\text{CH}_3)_3\text{CO}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_2(\text{H or } (\text{CH}_3)_3)$ (dipropylene glycol t-butyl (or di-t-butyl) ether), $(\text{CH}_3)_3\text{CO}[\text{CH}_2\text{CH}(\text{CH}_3)\text{O}]_3(\text{H or } (\text{CH}_3)_3)$ (tripropylene glycol t-butyl (or di-t-butyl) ether), $\text{C}_5\text{H}_{11}\text{OCH}_2\text{CH}(\text{CH}_3)\text{OH}$ (propylene glycol n-pentyl ether), $\text{C}_4\text{H}_9\text{OCH}_2\text{CH}(\text{C}_2\text{H}_5)\text{OH}$ (butylene glycol n-butyl ether),
- 20 $\text{C}_4\text{H}_9\text{O}[\text{CH}_2\text{CH}(\text{C}_2\text{H}_5)\text{O}]_2\text{H}$ (dibutylene glycol n-butyl ether), trimethylolpropane tri-n-butyl ether ($\text{C}_2\text{H}_5\text{C}(\text{CH}_2\text{O}(\text{CH}_2)_3\text{CH}_3)_3$) and trimethylolpropane di-n-butyl ether ($\text{C}_2\text{H}_5\text{C}(\text{CH}_2\text{OC}(\text{CH}_2)_3\text{CH}_3)_2\text{CH}_2\text{OH}$).

Amide solubilizing agents of the present invention comprise those represented by the formulae $\text{R}^1\text{C}(\text{O})\text{NR}^2\text{R}^3$ and cyclo- $[\text{R}^4\text{C}(\text{O})\text{N}(\text{R}^5)]_n$, wherein R^1 , R^2 , R^3 and R^5 are independently selected from aliphatic and alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms; R^4 is selected from aliphatic hydrocarbylene radicals having from 3 to 12 carbon

30

atoms; and wherein said amides have a molecular weight of from about 100 to about 300 atomic mass units. The molecular weight of said amides is preferably from about 160 to about 250 atomic mass units. R^1 , R^2 , R^3 and R^5 may optionally include substituted hydrocarbon radicals, that is, radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R^1 , R^2 , R^3 and R^5 may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals, which contain the atoms nitrogen (aza-), oxygen (oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In general, no more than three non-hydrocarbon substituents and heteroatoms, and preferably no more than one, will be present for each carbon atoms in R^{1-3} , and the presence of any such non-hydrocarbon substituents and heteroatoms must be considered in applying the aforementioned molecular weight limitations. Preferred amide solubilizing agents consist of carbon, hydrogen, nitrogen and oxygen. Representative R^1 , R^2 , R^3 and R^5 aliphatic and alicyclic hydrocarbon radicals include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers. A preferred embodiment of amide solubilizing agents are those wherein R^4 in the aforementioned formula $\text{cyclo-[R}^4\text{C(O)N(R}^5\text{)-]}$ may be represented by the hydrocarbylene radical $(\text{CR}^6\text{R}^7)_n$, in other words, the formula $\text{cyclo-}[(\text{CR}^6\text{R}^7)_n\text{C(O)N(R}^5\text{)-}]$ wherein the previously-stated values for molecular weight apply; n is an integer from 3 to 5; R^5 is a saturated hydrocarbon radical containing 1 to 12 carbon atoms; R^6 and R^7 are independently selected (for each n) by the rules previously offered defining R^{1-3} . In the lactams represented by the formula: $\text{cyclo-}[(\text{CR}^6\text{R}^7)_n\text{C(O)N(R}^5\text{)-}]$, all R^6 and R^7 are preferably hydrogen, or contain a single saturated hydrocarbon radical among the n methylene units, and R^5 is a saturated hydrocarbon radical containing 3 to 12 carbon atoms. For example, 1-(saturated hydrocarbon radical)-5-methylpyrrolidin-2-ones.

Representative amide solubilizing agents include but are not limited to: 1-octylpyrrolidin-2-one, 1-decylpyrrolidin-2-one, 1-octyl-5-methylpyrrolidin-2-one, 1-butylcaprolactam, 1-cyclohexylpyrrolidin-2-one, 1-butyl-5-methylpiperid-2-one, 1-pentyl-5-methylpiperid-2-one, 1-hexylcaprolactam, 1-hexyl-5-methylpyrrolidin-2-one, 5-methyl-1-pentylpiperid-2-one, 1,3-dimethylpiperid-2-one, 1-methylcaprolactam, 1-butyl-pyrrolidin-2-one, 1,5-dimethylpiperid-2-one, 1-decyl-5-methylpyrrolidin-2-one, 1-dodecylpyrrolid-2-one, N,N-dibutylformamide and N,N-diisopropylacetamide.

10 Ketone solubilizing agents of the present invention comprise ketones represented by the formula $R^1C(O)R^2$, wherein R^1 and R^2 are independently selected from aliphatic, alicyclic and aryl hydrocarbon radicals having from 1 to 12 carbon atoms, and wherein said ketones have a molecular weight of from about 70 to about 300 atomic mass units. R^1 and R^2 in said ketones are preferably independently selected from aliphatic and alicyclic hydrocarbon radicals having 1 to 9 carbon atoms. The molecular weight of said ketones is preferably from about 100 to 200 atomic mass units. R^1 and R^2 may together form a hydrocarbylene radical connected and forming a five, six, or seven-membered ring cyclic ketone, for example, cyclopentanone, cyclohexanone, and cycloheptanone. R^1 and R^2 may optionally include substituted hydrocarbon radicals, that is, radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R^1 and R^2 may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals, which contain the atoms nitrogen (aza-), oxygen (keto-, oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In general, no more than three non-hydrocarbon substituents and heteroatoms, and preferably no more than one, will be present for each 10 carbon atoms in R^1 and R^2 , and the presence of any such non-hydrocarbon substituents and heteroatoms must be considered in applying the aforementioned molecular weight limitations. Representative R^1 and R^2 aliphatic, alicyclic and aryl hydrocarbon radicals in the general formula

$R^1C(O)R^2$ include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers, as well as phenyl, benzyl, cumenyl, mesityl, tolyl, xylyl and phenethyl.

Representative ketone solubilizing agents include but are not limited to: 2-butanone, 2-pentanone, acetophenone, butyrophenone, hexanophenone, cyclohexanone, cycloheptanone, 2-heptanone, 3-heptanone, 5-methyl-2-hexanone, 2-octanone, 3-octanone, diisobutyl ketone, 4-ethylcyclohexanone, 2-nonanone, 5-nonanone, 2-decanone, 4-decanone, 2-decalone, 2-tridecanone, dihexyl ketone and dicyclohexyl ketone.

Nitrile solubilizing agents of the present invention comprise nitriles represented by the formula R^1CN , wherein R^1 is selected from aliphatic, alicyclic or aryl hydrocarbon radicals having from 5 to 12 carbon atoms, and wherein said nitriles have a molecular weight of from about 90 to about 200 atomic mass units. R^1 in said nitrile solubilizing agents is preferably selected from aliphatic and alicyclic hydrocarbon radicals having 8 to 10 carbon atoms. The molecular weight of said nitrile solubilizing agents is preferably from about 120 to about 140 atomic mass units. R^1 may optionally include substituted hydrocarbon radicals, that is, radicals containing non-hydrocarbon substituents selected from halogens (e.g., fluorine, chlorine) and alkoxides (e.g. methoxy). R^1 may optionally include heteroatom-substituted hydrocarbon radicals, that is, radicals, which contain the atoms nitrogen (aza-), oxygen (keto-, oxa-) or sulfur (thia-) in a radical chain otherwise composed of carbon atoms. In general, no more than three non-hydrocarbon substituents and heteroatoms, and preferably no more than one, will be present for each 10 carbon atoms in R^1 , and the presence of any such non-hydrocarbon substituents and heteroatoms must be considered in applying the aforementioned molecular weight limitations. Representative R^1 aliphatic, alicyclic and aryl hydrocarbon radicals in the general formula R^1CN include pentyl,

isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers, as well as phenyl, benzyl, cumenyl, mesityl, tolyl, xylyl and phenethyl.

Representative nitrile solubilizing agents include but are not limited to:

- 5 cyanopentane, 2,2-dimethyl-4-cyanopentane, 1-cyanoheptane, 1-cyanoheptane, 1-cyanooctane, 2-cyanooctane, 1-cyanononane, 1-cyanodecane, 2-cyanodecane, 1-cyanoundecane and 1-cyanododecane.

- Chlorocarbon solubilizing agents of the present invention comprise chlorocarbons represented by the formula RCl_x , wherein x is 1 or
10 2; R is selected from aliphatic and alicyclic hydrocarbon radicals having 1 to 12 carbon atoms; and wherein said chlorocarbons have a molecular weight of from about 100 to about 200 atomic mass units. The molecular weight of said chlorocarbon solubilizing agents is preferably from about 120 to 150 atomic mass units. Representative R aliphatic and alicyclic
15 hydrocarbon radicals in the general formula RCl_x include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, pentyl, isopentyl, neopentyl, *tert*-pentyl, cyclopentyl, cyclohexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl and their configurational isomers.


- Representative chlorocarbon solubilizing agents include but are
20 not limited to: 3-(chloromethyl)pentane, 3-chloro-3-methylpentane, 1-chlorohexane, 1,6-dichlorohexane, 1-chloroheptane, 1-chlorooctane, 1-chlorononane, 1-chlorodecane, and 1,1,1-trichlorodecane.

- Ester solubilizing agents of the present invention comprise esters represented by the general formula $\text{R}^1\text{C}(\text{O})\text{OR}^2$, wherein R^1 and R^2
25 are independently selected from linear and cyclic, saturated and unsaturated, alkyl and aryl radicals. Preferred esters consist essentially of the elements C, H and O, have a molecular weight of from about 80 to about 550 atomic mass units.


- Representative esters include but are not limited to:
30 $(\text{CH}_3)_2\text{CHCH}_2\text{O}(\text{O})\text{C}(\text{CH}_2)_{2-4}(\text{O})\text{COCH}_2\text{CH}(\text{CH}_3)_2$ (diisobutyl dibasic ester), ethyl hexanoate, ethyl heptanoate, *n*-butyl propionate, *n*-propyl propionate, ethyl benzoate, di-*n*-propyl phthalate, benzoic acid ethoxyethyl ester,

dipropyl carbonate, "Exxate 700" (a commercial C₇ alkyl acetate), "Exxate 800" (a commercial C₈ alkyl acetate), dibutyl phthalate, and tert-butyl acetate.


Lactone solubilizing agents of the present invention comprise
5 lactones represented by structures [A], [B], and [C]:



[A]



[B]



[C]

10

These lactones contain the functional group $-C(O)O-$ in a ring of six (A), or preferably five atoms (B), wherein for structures [A] and [B], R₁ through R₈ are independently selected from hydrogen or linear, branched, cyclic, bicyclic, saturated and unsaturated hydrocarbyl radicals.

15 Each R₁ through R₈ may be connected forming a ring with another R₁ through R₈. The lactone may have an exocyclic alkylidene group as in structure [C], wherein R₁ through R₆ are independently selected from hydrogen or linear, branched, cyclic, bicyclic, saturated and unsaturated hydrocarbyl radicals. Each R₁ though R₆ may be connected forming a ring

20 with another R₁ through R₆. The lactone solubilizing agents have a molecular weight range of from about 80 to about 300 atomic mass units, preferred from about 80 to about 200 atomic mass units.

Representative lactone solubilizing agents include but are not limited to the compounds listed in Table 4.

25

TABLE 4

Additive	Molecular Structure	Molecular Formula	Molecular Weight (amu)
(E,Z)-3-ethylidene-5-methyl-dihydro-furan-2-one		C ₇ H ₁₀ O ₂	126

(E,Z)-3-propylidene-5-methyl-dihydro-furan-2-one		$C_8H_{12}O_2$	140
(E,Z)-3-butylidene-5-methyl-dihydro-furan-2-one		$C_9H_{14}O_2$	154
(E,Z)-3-pentylidene-5-methyl-dihydro-furan-2-one		$C_{10}H_{16}O_2$	168
(E,Z)-3-Hexylidene-5-methyl-dihydro-furan-2-one		$C_{11}H_{18}O_2$	182
(E,Z)-3-Heptylidene-5-methyl-dihydro-furan-2-one		$C_{12}H_{20}O_2$	196
(E,Z)-3-octylidene-5-methyl-dihydro-furan-2-one		$C_{13}H_{22}O_2$	210
(E,Z)-3-nonylidene-5-methyl-dihydro-furan-2-one		$C_{14}H_{24}O_2$	224
(E,Z)-3-decylidene-5-methyl-dihydro-furan-2-one		$C_{15}H_{26}O_2$	238
(E,Z)-3-(3,5,5-trimethylhexylidene)-5-methyl-dihydrofuran-2-one		$C_{14}H_{24}O_2$	224
(E,Z)-3-cyclohexylmethylidene-5-methyl-dihydrofuran-2-one		$C_{12}H_{18}O_2$	194
gamma-octalactone		$C_8H_{14}O_2$	142
gamma-nonolactone		$C_9H_{16}O_2$	156
gamma-decalactone		$C_{10}H_{18}O_2$	170
gamma-undecalactone		$C_{11}H_{20}O_2$	184
gamma-dodecalactone		$C_{12}H_{22}O_2$	198
3-hexyldihydro-furan-2-one		$C_{10}H_{18}O_2$	170
3-heptyldihydro-furan-2-one		$C_{11}H_{20}O_2$	184
cis-3-ethyl-5-methyl-dihydro-furan-2-one		$C_7H_{12}O_2$	128
cis-(3-propyl-5-methyl)-dihydro-furan-2-one		$C_8H_{14}O_2$	142

<i>cis</i> -(3-butyl-5-methyl)-dihydro-furan-2-one		$C_9H_{18}O_2$	156
<i>cis</i> -(3-pentyl-5-methyl)-dihydro-furan-2-one		$C_{10}H_{18}O_2$	170
<i>cis</i> -3-hexyl-5-methyl-dihydro-furan-2-one		$C_{11}H_{20}O_2$	184
<i>cis</i> -3-heptyl-5-methyl-dihydro-furan-2-one		$C_{12}H_{22}O_2$	198
<i>cis</i> -3-octyl-5-methyl-dihydro-furan-2-one		$C_{13}H_{24}O_2$	212
<i>cis</i> -3-(3,5,5-trimethylhexyl)-5-methyl-dihydro-furan-2-one		$C_{14}H_{26}O_2$	226
<i>cis</i> -3-cyclohexylmethyl-5-methyl-dihydro-furan-2-one		$C_{12}H_{20}O_2$	196
5-methyl-5-hexyl-dihydro-furan-2-one		$C_{11}H_{20}O_2$	184
5-methyl-5-octyl-dihydro-furan-2-one		$C_{13}H_{24}O_2$	212
Hexahydro-isobenzofuran-1-one		$C_8H_{12}O_2$	140
<i>delta</i> -decalactone		$C_{10}H_{18}O_2$	170
<i>delta</i> -undecalactone		$C_{11}H_{20}O_2$	184
<i>delta</i> -dodecalactone		$C_{12}H_{22}O_2$	198
mixture of 4-hexyl-dihydrofuran-2-one and 3-hexyl-dihydro-furan-2-one		$C_{10}H_{18}O_2$	170

Lactone solubilizing agents generally have a kinematic viscosity of less than about 7 centistokes at 40°C. For instance, gamma-undecalactone has kinematic viscosity of 5.4 centistokes and cis-(3-hexyl-5-methyl)dihydrofuran-2-one has viscosity of 4.5 centistokes, both at 40°C.

- 5 Lactone solubilizing agents may be available commercially or prepared by methods as described in U. S. patent application 10/910,495, filed August 3, 2004, incorporated herein by reference.

- Aryl ether solubilizing agents of the present invention comprise aryl ethers represented by the formula R^1OR^2 , wherein: R^1 is selected from aryl hydrocarbon radicals having from 6 to 12 carbon atoms; R^2 is selected from aliphatic hydrocarbon radicals having from 1 to 4 carbon atoms; and wherein said aryl ethers have a molecular weight of from about 100 to about 150 atomic mass units. Representative R^1 aryl radicals in the general formula R^1OR^2 include phenyl, biphenyl, cumenyl, mesityl, tolyl, xylyl, naphthyl and pyridyl. Representative R^2 aliphatic hydrocarbon radicals in the general formula R^1OR^2 include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl and *tert*-butyl. Representative aromatic ether solubilizing agents include but are not limited to: methyl phenyl ether (anisole), 1,3-dimethoxybenzene, ethyl phenyl ether and butyl phenyl ether.

- Fluoroether solubilizing agents of the present invention comprise those represented by the general formula $R^1OCF_2CF_2H$, wherein R^1 is selected from aliphatic, alicyclic, and aromatic hydrocarbon radicals having from about 5 to about 15 carbon atoms, preferably primary, linear, saturated, alkyl radicals. Representative fluoroether solubilizing agents include but are not limited to: $C_8H_{17}OCF_2CF_2H$ and $C_6H_{13}OCF_2CF_2H$. It should be noted that if the refrigerant is a fluoroether, then the solubilizing agent may not be the same fluoroether.

- Fluoroether solubilizing agents may further comprise ethers derived from fluoro-olefins and polyols. The fluoro-olefins may be of the type $CF_2=CXY$, wherein X is hydrogen, chlorine or fluorine, and Y is chlorine, fluorine, CF_3 or OR_f , wherein R_f is CF_3 , C_2F_5 , or C_3F_7 .

Representative fluoro-olefins are tetrafluoroethylene, chlorotrifluoroethylene, hexafluoropropylene, and perfluoromethylvinyl ether. The polyols may be linear or branched. Linear polyols may be of the type $\text{HOCH}_2(\text{CHOH})_x(\text{CRR}')_y\text{CH}_2\text{OH}$, wherein R and R' are hydrogen, or CH_3 , or C_2H_5 and wherein x is an integer from 0-4, and y is an integer from 0-4. Branched polyols may be of the type $\text{C}(\text{OH})_t(\text{R})_u(\text{CH}_2\text{OH})_v[(\text{CH}_2)_m\text{CH}_2\text{OH}]_w$, wherein R may be hydrogen, CH_3 or C_2H_5 , m may be an integer from 0 to 3, t and u may be 0 or 1, v and w are integers from 0 to 4, and also wherein $t + u + v + w = 4$.

Representative polyols are trimethylol propane, pentaerythritol, butanediol, and ethylene glycol.

1,1,1-Trifluoroalkane solubilizing agents of the present invention comprise 1,1,1-trifluoroalkanes represented by the general formula CF_3R^1 , wherein R^1 is selected from aliphatic and alicyclic hydrocarbon radicals having from about 5 to about 15 carbon atoms, preferably primary, linear, saturated alkyl radicals. Representative 1,1,1-trifluoroalkane solubilizing agents include but are not limited to: 1,1,1-trifluorohexane and 1,1,1-trifluorododecane.

Solubilizing agents of the present invention may be present as a single compound, or may be present as a mixture of more than one solubilizing agent. Mixtures of solubilizing agents may contain two solubilizing agents from the same class of compounds, say two lactones, or two solubilizing agents from two different classes, such as a lactone and a polyoxyalkylene glycol ether.

In the present compositions comprising refrigerant and UV fluorescent dye, or comprising heat transfer fluid and UV fluorescent dye, from about 0.001 weight percent to about 1.0 weight percent of the compositions is UV dye, preferably from about 0.005 weight percent to about 0.5 weight percent, and most preferably from 0.01 weight percent to about 0.25 weight percent.

Solubility of these UV fluorescent dyes in refrigerants and heat transfer fluids may be poor. Therefore, methods for introducing these

dyes into the refrigeration or air-conditioning apparatus have been awkward, costly and time consuming. US patent no. RE 36,951 describes a method, which utilizes a dye powder, solid pellet or slurry of dye that may be inserted into a component of the refrigeration or air-conditioning apparatus. As refrigerant and lubricant are circulated through the apparatus, the dye is dissolved or dispersed and carried throughout the apparatus. Numerous other methods for introducing dye into a refrigeration or air-conditioning apparatus are described in the literature.

Ideally, the UV fluorescent dye could be dissolved in the refrigerant itself thereby not requiring any specialized method for introduction to the refrigeration or air-conditioning apparatus. The present invention relates to compositions including UV fluorescent dye, which may be introduced into the system in the refrigerant. The inventive compositions will allow the storage and transport of dye-containing refrigerant and heat transfer fluid even at low temperatures while maintaining the dye in solution.

In the present compositions comprising refrigerant, UV fluorescent dye and solubilizing agent, or comprising heat transfer fluid, UV fluorescent dye and solubilizing agent, from about 1 to about 50 weight percent, preferably from about 2 to about 25 weight percent, and most preferably from about 5 to about 15 weight percent of the combined composition is solubilizing agent in the refrigerant or heat transfer fluid. In the compositions of the present invention the UV fluorescent dye is present in a concentration from about 0.001 weight percent to about 1.0 weight percent in the refrigerant or heat transfer fluid, preferably from 0.005 weight percent to about 0.5 weight percent, and most preferably from 0.01 weight percent to about 0.25 weight percent.

Optionally, commonly used refrigeration or air-conditioning system additives may be added, as desired, to compositions of the present invention in order to enhance performance and system stability. These additives are known in the field of refrigeration and air-cinditioning, and include, but are not limited to, anti wear agents, extreme pressure

lubricants, corrosion and oxidation inhibitors, metal surface deactivators, free radical scavengers, and foam control agents. In general, these additives are present in the inventive compositions in small amounts relative to the overall composition. Typically concentrations of from less than about 0.1 weight percent to as much as about 3 weight percent of each additive are used. These additives are selected on the basis of the individual system requirements. These additives include members of the triaryl phosphate family of EP (extreme pressure) lubricity additives, such as butylated triphenyl phosphates (BTPP), or other alkylated triaryl phosphate esters, e.g. Syn-0-Ad 8478 from Akzo Chemicals, tricresyl phosphates and related compounds. Additionally, the metal dialkyl dithiophosphates (e.g. zinc dialkyl dithiophosphate (or ZDDP), Lubrizol 1375 and other members of this family of chemicals may be used in compositions of the present invention. Other antiwear additives include natural product oils and asymmetrical polyhydroxyl lubrication additives, such as Synergol TMS (International Lubricants). Similarly, stabilizers such as anti oxidants, free radical scavengers, and water scavengers may be employed. Compounds in this category can include, but are not limited to, butylated hydroxy toluene (BHT) and epoxides.

Solubilizing agents such as ketones may have an objectionable odor, which can be masked by addition of an odor masking agent or fragrance. Typical examples of odor masking agents or fragrances may include Evergreen, Fresh Lemon, Cherry, Cinnamon, Peppermint, Floral or Orange Peel, all commercially available, as well as d-limonene and pinene. Such odor masking agents may be used at concentrations of from about 0.001% to as much as about 15% by weight based on the combined weight of odor masking agent and solubilizing agent.

The present invention further relates to a method of using the refrigerant or heat transfer fluid compositions further comprising ultraviolet fluorescent dye, and optionally, solubilizing agent, in refrigeration or air-conditioning apparatus. The method comprises introducing the refrigerant or heat transfer fluid composition into the refrigeration or air-conditioning apparatus. This may be done by dissolving the UV fluorescent dye in the refrigerant or heat transfer fluid composition in the presence of a

solubilizing agent and introducing the combination into the apparatus. Alternatively, this may be done by combining solubilizing agent and UV fluorescent dye and introducing said combination into refrigeration or air-conditioning apparatus containing refrigerant and/or heat transfer fluid.

- 5 The resulting composition may be used in the refrigeration or air-conditioning apparatus.

The present invention further relates to a method of using the refrigerant or heat transfer fluid compositions comprising ultraviolet fluorescent dye to detect leaks. The presence of the dye in the
10 compositions allows for detection of leaking refrigerant in the refrigeration or air-conditioning apparatus. Leak detection helps to address, resolve or prevent inefficient operation of the apparatus or system or equipment failure. Leak detection also helps one contain chemicals used in the operation of the apparatus.

15 The method comprises providing the composition comprising refrigerant and ultra-violet fluorescent dye, or comprising heat transfer fluid and ultra-violet fluorescent dye as described herein, and optionally, a solubilizing agent as described herein, to refrigeration and air-conditioning apparatus and employing a suitable means for detecting the UV
20 fluorescent dye-containing refrigerant. Suitable means for detecting the dye include, but are not limited to, ultra-violet lamp, often referred to as a "black light" or "blue light". Such ultra-violet lamps are commercially available from numerous sources specifically designed for this purpose. Once the ultra-violet fluorescent dye containing composition has been
25 introduced to the refrigeration or air-conditioning apparatus and has been allowed to circulate throughout the system, a leak can be found by shining said ultra-violet lamp on the apparatus and observing the fluorescence of the dye in the vicinity of any leak point.

The present invention further relates to a method of using the
30 compositions of the present invention for producing cooling or heat, wherein the method comprises producing cooling by evaporating said composition in the vicinity of a body to be cooled and thereafter condensing said composition; or producing heat by condensing said composition in the vicinity of the body to be heated and thereafter
35 evaporating said composition. Where the composition of the present invention includes refrigerant or heat transfer fluid composition with an ultra-violet fluorescent dye, and/or a solubilizing agent, the refrigerant or

heat transfer fluid component of the composition is evaporated and thereafter condensed to produce cooling, or condensed and thereafter evaporated to produce heat.

5 Mechanical refrigeration is primarily an application of thermodynamics wherein a cooling medium, such as a refrigerant, goes through a cycle so that it can be recovered for reuse. Commonly used cycles include vapor-compression, absorption, steam-jet or steam-ejector, and air.

Vapor-compression refrigeration systems include an
10 evaporator, a compressor, a condenser, and an expansion device. A vapor-compression cycle re-uses refrigerant in multiple steps producing a cooling effect in one step and a heating effect in a different step. The cycle can be described simply as follows. Liquid refrigerant enters an evaporator through an expansion device, and the liquid refrigerant boils in
15 the evaporator at a low temperature to form a gas and produce cooling. The low-pressure gas enters a compressor where the gas is compressed to raise its pressure and temperature. The higher-pressure (compressed) gaseous refrigerant then enters the condenser in which the refrigerant condenses and discharges its heat to the environment. The refrigerant
20 returns to the expansion device through which the liquid expands from the higher-pressure level in the condenser to the low-pressure level in the evaporator, thus repeating the cycle.

The present invention further relates to a process for producing cooling comprising evaporating the compositions of the present invention
25 in the vicinity of a body to be cooled, and thereafter condensing said compositions.

The present invention further relates to a process for producing heat comprising condensing the compositions of the present invention in the vicinity of a body to be heated, and thereafter evaporating said
30 compositions.

There are various types of compressors that may be used in refrigeration applications. Compressors can be generally classified as reciprocating, rotary, jet, centrifugal, scroll, screw or axial-flow, depending on the mechanical means to compress the fluid, or as positive-

displacement (e.g., reciprocating, scroll or screw) or dynamic (e.g., centrifugal or jet), depending on how the mechanical elements act on the fluid to be compressed.

be compressed.

5 Either positive displacement or dynamic compressors may be used in the present inventive process. A centrifugal type compressor is the preferred equipment for the present refrigerant compositions.

 A centrifugal compressor uses rotating elements to accelerate the refrigerant radially, and typically includes an impeller and diffuser
10 housed in a casing. Centrifugal compressors usually take fluid in at an impeller eye, or central inlet of a circulating impeller, and accelerate it radially outward. Some static pressure rise occurs in the impeller, but most of the pressure rise occurs in the diffuser section of the casing, where velocity is converted to static pressure. Each impeller-diffuser set is
15 a stage of the compressor. Centrifugal compressors are built with from 1 to 12 or more stages, depending on the final pressure desired and the volume of refrigerant to be handled.

 The pressure ratio, or compression ratio, of a compressor is the ratio of absolute discharge pressure to the absolute inlet pressure.
20 Pressure delivered by a centrifugal compressor is practically constant over a relatively wide range of capacities.

 Positive displacement compressors draw vapor into a chamber, and the chamber decreases in volume to compress the vapor. After being compressed, the vapor is forced from the chamber by further decreasing
25 the volume of the chamber to zero or nearly zero. A positive displacement compressor can build up a pressure, which is limited only by the volumetric efficiency and the strength of the parts to withstand the pressure.

 Unlike a positive displacement compressor, a centrifugal
30 compressor depends entirely on the centrifugal force of the high-speed impeller to compress the vapor passing through the impeller. There is no positive displacement, but rather what is called dynamic-compression.

The pressure a centrifugal compressor can develop depends on the tip speed of the impeller. Tip speed is the speed of the impeller measured at its tip and is related to the diameter of the impeller and its revolutions per minute. The capacity of the centrifugal compressor is
5 determined by the size of the passages through the impeller. This makes the size of the compressor more dependent on the pressure required than the capacity.

Because of its high-speed operation, a centrifugal compressor is fundamentally a high volume, low-pressure machine. A centrifugal
10 compressor works best with a low-pressure refrigerant, such as trichlorofluoromethane (CFC-11) or 1,2,2-trichlorotrifluoroethane (CFC-113).

Large centrifugal compressors typically operate at 3000 to 7000 revolutions per minute (rpm). Small turbine centrifugal compressors
15 are designed for high speeds, from about 40,000 to about 70,000 (rpm), and have small impeller sizes, typically less than 0.15 meters (about 6 inches).

A multi-stage impeller may be used in a centrifugal compressor to improve compressor efficiency thus requiring less power in use. For a
20 two-stage system, in operation, the discharge of the first stage impeller goes to the suction intake of a second impeller. Both impellers may operate by use of a single shaft (or axle). Each stage can build up a compression ratio of about 4 to 1; that is, the absolute discharge pressure can be four times the absolute suction pressure. Several examples of two-
25 stage centrifugal compressor systems, particularly for automotive applications, are described in US 5,065,990 and US 5,363,674, both incorporated herein by reference.

The compositions of the present invention suitable for use in a refrigeration or air-conditioning systems employing a centrifugal
30 compressor comprise $C_4F_9OCH_3$ and at least one compound selected from the group consisting of:

N-(difluoromethyl)-N,N-dimethylamine;
diisopropyl ether;
dimethoxymethane;

ethyl acetate;
ethyl formate;
methanol;
methyl acetate;
5 methyl formate;
tert-butyl methyl ether;
trans-1,2-dichloroethylene; and
C₄F₉OC₂H₅ and trans-1,2-dichloroethylene.

These above-listed compositions are also suitable for use in a
10 multi-stage centrifugal compressor, preferably a two-stage centrifugal
compressor apparatus.

The compositions of the present invention may be used in
stationary air-conditioning, heat pumps or mobile air-conditioning and
refrigeration systems. Stationary air-conditioning and heat pump
15 applications include window, ductless, ducted, packaged terminal, chillers
and commercial, including packaged rooftop. Refrigeration applications
include domestic or home refrigerators and freezers, ice machines, self-
contained coolers and freezers, walk-in coolers and freezers and transport
refrigeration systems.

20 The compositions of the present invention may additionally be
used in air-conditioning, heating and refrigeration systems that employ fin
and tube heat exchangers, microchannel heat exchangers and vertical or
horizontal single pass tube or plate type heat exchangers.

Conventional microchannel heat exchangers may not be ideal
25 for the low pressure refrigerant compositions of the present invention. The
low operating pressure and density result in high flow velocities and high
frictional losses in all components. In these cases, the evaporator design
may be modified. Rather than several microchannel slabs connected in
series (with respect to the refrigerant path) a single slab/single pass heat
30 exchanger arrangement may be used. Therefore, a preferred heat
exchanger for the low pressure refrigerants of the present invention is a
single slab/single pass heat exchanger.

In addition to two-stage or other multi-stage centrifugal
compressor apparatus, compositions of the present invention suitable for
35 use in refrigeration or air-conditioning apparatus employing a single
slab/single pass heat exchanger comprise C₄F₉OCH₃ and at least one
compound selected from the group consisting of:

5 N-(difluoromethyl)-N,N-dimethylamine;
diisopropyl ether;
dimethoxymethane;
ethyl acetate;
ethyl formate;
methanol;
methyl acetate;
methyl formate;
tert-butyl methyl ether;
10 trans-1,2-dichloroethylene; and
C₄F₉OC₂H₅ and trans-1,2-dichloroethylene.

The compositions of the present invention are particularly useful in small turbine centrifugal compressors (mini-centrifugal compressors), which can be used in auto and window air-conditioning,
15 heat pumps, or transport refrigeration, as well as other applications. These high efficiency mini-centrifugal compressors may be driven by an electric motor and can therefore be operated independently of the engine speed. A constant compressor speed allows the system to provide a relatively constant cooling capacity at all engine speeds. This provides an
20 opportunity for efficiency improvements especially at higher engine speeds as compared to a conventional R-134a automobile air-conditioning system. When the cycling operation of conventional systems at high driving speeds is taken into account, the advantage of these low pressure systems becomes even greater.

25 Alternatively, rather than use electrical power, the mini-centrifugal compressor may be powered by an engine exhaust gas driven turbine or a ratioed gear drive assembly with ratioed belt drive. The electrical power available in current automobile design is about 14 volts, but the new mini-centrifugal compressor requires electrical power of about
30 50 volts. Therefore, use of an alternative power source would be advantageous. A refrigeration or air-conditioning apparatus powered by an engine exhaust gas driven turbine is described in detail in U.S. provisional patent application no. 60/658,915, filed March 4, 2005, incorporated herein by reference. A refrigeration or air-conditioning
35 apparatus powered by a ratioed gear drive assembly is described in detail in U.S. provisional patent application no. 60/663924, filed March 21, 2005, incorporated herein by reference.

The present invention further relates to a process to produce cooling comprising compressing a composition of the present invention, in a mini-centrifugal compressor powered by an engine exhaust gas driven turbine; condensing said composition; and thereafter evaporating said
5 composition in the vicinity of a body to be cooled.

The present invention further relates to a process to produce cooling comprising compressing a composition of the present invention, in a mini-centrifugal compressor powered by a ratioed gear drive assembly with a ratioed belt drive; condensing said composition; and thereafter
10 evaporating said composition in the vicinity of a body to be cooled.

Some of the low pressure refrigerant fluids of the present invention may be suitable as drop-in replacements for CFC-113 in existing centrifugal equipment.

The present invention further relates to a method for replacing
15 CFC-113 in existing refrigeration apparatus or air-conditioning apparatus, said method comprising providing a composition of the present invention as the replacement.

The present invention further relates to a process for transfer of heat from a heat source to a heat sink wherein the compositions of the
20 present invention serve as heat transfer fluids. Said process for heat transfer comprises transferring the compositions of the present invention from a heat source to a heat sink.

Heat transfer fluids are utilized to transfer, move or remove heat from one space, location, object or body to a different space, location,
25 object or body by radiation, conduction, or convection. A heat transfer fluid may function as a secondary coolant by providing means of transfer for cooling (or heating) from a remote refrigeration (or heating) system. In some systems, the heat transfer fluid may remain in a constant state throughout the transfer process (i.e., not evaporate or condense).
30 Alternatively, evaporative cooling processes may utilize heat transfer fluids as well.

A heat source may be defined as any space, location, object or body from which it is desirable to transfer, move or remove heat. Examples of heat sources may be spaces (open or enclosed) requiring
35 refrigeration or cooling, such as refrigerator or freezer cases in a

supermarket, building spaces requiring air-conditioning, or the passenger compartment of an automobile requiring air-conditioning. A heat sink may be defined as any space, location, object or body capable of absorbing heat. A vapor compression refrigeration system is one example of such a heat sink.

EXAMPLES

EXAMPLE 1

Impact of Vapor Leakage

A vessel is charged with an initial composition at a specified temperature, and the initial vapor pressure of the composition is measured. The composition is allowed to leak from the vessel, while the temperature is held constant, until 50 weight percent of the initial composition is removed, at which time the vapor pressure of the composition remaining in the vessel is measured. The results are summarized in Table 5 below.

TABLE 5

<u>Compounds</u> <u>wt% A/ wt% B</u>	<u>Initial</u> <u>Psia</u>	<u>Initial</u> <u>kPa</u>	<u>After 50%</u> <u>Leak</u> <u>Psia</u>	<u>After 50%</u> <u>Leak</u> <u>kPa</u>	<u>Delta</u> <u>P %</u>
C₄F₉OCH₃/N(CH₃)₂(CHF₂) (47.5 °C)					
41.1/58.9	14.72	101.49	14.72	101.49	0.0%
20/80	14.53	100.18	14.46	99.70	0.5%
10/90	14.31	98.66	14.23	98.11	0.6%
1/99	14.03	96.73	14.01	96.60	0.1%
0/100	13.99	96.46	13.99	96.46	0.0%
60/40	14.52	100.11	14.39	99.22	0.9%
80/20	13.53	93.29	12.80	88.25	5.4%
90/10	12.25	84.46	11.24	77.50	8.2%
99/1	9.96	68.67	9.73	67.09	2.3%
100/0	9.59	66.12	9.59	66.12	0.0%
C₄F₉OCH₃/diisopropyl ether (54.2 °C)					
75.5/24.5	14.68	101.22	14.68	101.22	0.0%
90/10	14.18	97.77	13.80	95.15	2.7%
99/1	12.47	85.98	12.27	84.60	1.6%
100/0	12.10	83.43	12.10	83.43	0.0%
60/40	14.47	99.77	14.19	97.84	1.9%
45/55	14.03	96.73	12.71	87.63	9.4%
44/56	13.99	96.46	12.56	86.60	10.2%

1/100	9.26	63.85	9.26	63.85	0.0%
C ₄ F ₉ OCH ₃ /dimethoxymethane (42.0 °C)					
56.3/43.7	14.72	101.49	14.72	101.49	0.0%
80/20	14.19	97.84	13.39	92.32	5.6%
84/16	13.88	95.70	12.52	86.32	9.8%
85/15	13.78	95.01	12.24	84.39	11.2%
100/0	7.86	54.19	7.86	54.19	0.0%
40/60	14.57	100.46	14.41	99.35	1.1%
20/80	14.01	96.60	13.61	93.84	2.9%
10/90	13.57	93.56	13.26	91.43	2.3%
1/99	13.07	90.12	13.03	89.84	0.3%
0/100	13.01	89.70	13.01	89.70	0.0%
C ₄ F ₉ OCH ₃ /ethyl acetate (57.9 °C)					
87.8/12.2	14.69	101.28	14.69	101.28	0.0%
95/5	14.46	99.70	14.37	99.08	0.6%
99/1	13.93	96.04	13.86	95.56	0.5%
100/0	13.71	94.53	13.71	94.53	0.0%
60/40	13.81	95.22	12.66	87.29	8.3%
58/42	13.73	94.67	12.37	85.29	9.9%
57/43	13.68	94.32	12.21	84.19	10.7%
0/100	7.84	54.08	7.84	54.06	0.0%
C ₄ F ₉ OCH ₃ /ethyl formate (41.0 °C)					
68.6/31.4	14.68	101.22	14.68	101.22	0.0%
80/20	14.61	100.73	14.33	98.80	1.9%
86/14	14.40	99.29	12.99	89.56	9.8%
87/13	14.34	98.87	12.53	86.39	12.6%
100/0	7.58	52.26	7.58	52.26	0.0%
50/50	14.63	100.87	14.40	99.29	1.6%
46/54	14.61	100.73	13.69	94.39	6.3%
45/55	14.61	100.73	13.12	90.46	10.2%
0/100	9.33	64.33	9.33	64.33	0.0%
C ₄ F ₉ OCH ₃ /methanol (58.7 °C)					
97.1/2.9	14.71	101.42	14.71	101.42	0.0%
99/1	14.54	100.25	14.54	100.25	0.0%
100/0	14.08	97.08	14.08	97.08	0.0%
80/20	13.28	91.56	12.91	89.01	2.8%
60/40	12.24	84.39	11.93	82.25	2.5%
40/60	11.69	80.60	11.51	79.36	1.5%
20/80	11.35	78.26	11.28	77.77	0.6%
1/99	11.14	76.81	11.14	76.81	0.0%
0/100	11.13	76.74	11.13	76.74	0.0%
C ₄ F ₉ OCH ₃ /methyl acetate (42.5 °C)					
72.1/27.9	14.69	101.28	14.69	101.28	0.0%

87/13	14.49	99.91	13.31	91.77	8.1%
88/12	14.43	99.49	12.85	88.60	10.9%
100/0	8.01	55.23	8.01	55.23	0.0%
60/40	14.67	101.15	14.62	100.80	0.3%
49/51	14.63	100.87	13.71	94.53	6.3%
48/52	14.63	100.87	12.80	88.25	12.5%
0/100	8.65	59.64	8.65	59.64	0.0%

C₄F₉OCH₃/methyl formate (26.0 °C)

57.4/42.6	14.67	101.15	14.67	101.15	0.0%
40/60	14.66	101.08	14.65	101.01	0.1%
38/62	14.66	101.08	14.63	100.87	0.2%
37/63	14.66	101.08	14.37	99.08	2.0%
0/100	11.12	76.67	11.12	76.67	0.0%
80/20	14.61	100.73	14.15	97.56	3.1%
83/17	14.58	100.53	13.41	92.46	8.0%
84/16	14.56	100.39	12.92	89.08	11.3%
100/0	4.23	29.17	4.23	29.17	0.0%

C₄F₉OCH₃/tert-butyl methyl ether (52.1 °C)

66.6/33.4	14.72	101.49	14.72	101.49	0.0%
80/20	14.49	99.91	14.29	98.53	1.4%
90/10	13.70	94.46	13.11	90.39	4.3%
99/1	11.65	80.32	11.44	78.88	1.8%
100/0	11.26	77.64	11.26	77.64	0.0%
40/60	14.27	98.39	12.79	88.18	10.4%
20/80	13.40	92.39	12.47	85.98	6.9%
10/90	12.71	87.63	12.03	82.94	5.4%
1/99	11.89	81.98	11.80	81.36	0.8%
0/100	11.78	81.22	11.78	81.22	0.0%

C₄F₉OCH₃/trans-DCE (41.0 °C)

54.6/45.4	14.70	101.35	14.70	101.35	0.0%
80/20	14.12	97.35	12.69	87.50	10.1%
79/21	14.19	97.84	12.93	89.15	8.9%
100/0	7.58	52.26	7.58	52.26	0.0%
40/60	14.60	100.66	14.36	99.01	1.6%
24/76	14.18	97.77	12.82	88.39	9.6%
23/77	14.14	97.49	12.71	87.63	10.1%
0/100	11.67	80.46	11.67	80.46	0.0%

C₄F₉OCH₃/ C₄F₉OC₂H₅/trans-DCE (50 °C)

10/10/80	18.50	127.55	16.98	117.07	8.2%
10/20/70	18.73	129.14	18.13	125.00	3.2%
20/10/70	19.13	131.90	18.25	125.83	4.6%
30/30/40	19.14	131.97	18.97	130.79	0.9%
30/40/30	18.84	129.90	18.14	125.07	3.7%
40/30/30	19.07	131.48	18.42	127.00	3.4%

10/40/50	18.72	129.07	18.66	128.66	0.3%
10/50/40	18.60	128.24	18.41	126.93	1.0%
50/10/40	19.66	135.55	19.57	134.93	0.5%
40/10/50	19.63	135.34	19.57	134.93	0.3%
60/10/30	19.57	134.93	19.01	131.07	2.9%
10/60/30	18.38	126.73	17.61	121.42	4.2%
10/30/60	18.77	129.42	18.65	128.59	0.6%
70/5/25	19.42	133.90	18.41	126.93	5.2%

The results show the difference in vapor pressure between the original composition and the composition remaining after 50 weight percent has been removed is less than about 10 percent for compositions of the present invention. This indicates compositions of the present invention are azeotropic or near-azeotropic.

EXAMPLE 2

Tip Speed to Develop Pressure

Tip speed can be estimated by making some fundamental relationships for refrigeration equipment that use centrifugal compressors. The torque an impeller ideally imparts to a gas is defined as

$$T = m(v_2 r_2 - v_1 r_1) \quad \text{Equation 1}$$

where

T = torque, Newton-meters

m = mass rate of flow, kg/sec

v_2 = tangential velocity of refrigerant leaving impeller (tip speed), meters/sec

r_2 = radius of exit impeller, meters

v_1 = tangential velocity of refrigerant entering impeller, meters/sec

r_1 = radius of inlet of impeller, meters

Assuming the refrigerant enters the impeller in an essentially axial direction, the tangential component of the velocity $v_1 = 0$, therefore

$$T = m v_2 r_2 \quad \text{Equation 2}$$

The power required at the shaft is the product of the torque and the rotative speed

$$P = T * \omega \quad \text{Equation 3}$$

5 where

P = power, W

ω = angular velocity, radians/s

therefore,

$$P = T * \omega = m * v_2 * r_2 * \omega \quad \text{Equation 4}$$

10

At low refrigerant flow rates, the tip speed of the impeller and the tangential velocity of the refrigerant are nearly identical; therefore

$$r_2 * \omega = v_2 \quad \text{Equation 5}$$

and

15

$$P = m * v_2 * v_2 \quad \text{Equation 6}$$

Another expression for ideal power is the product of the mass rate of flow and the isentropic work of compression,

$$P = m * H_i * (1000 \text{ J/kJ}) \quad \text{Equation 7}$$

20 where

H_i = Difference in enthalpy of the refrigerant from a saturated vapor at the evaporating conditions to saturated condensing conditions, kJ/kg.

Combining the two expressions Equation 6 and 7

25 produces,

$$v_2 * v_2 = 1000 * H_i \quad \text{Equation 8}$$

Although Equation 8 is based on some fundamental assumptions, it provides a good estimate of the tip speed of the impeller and provides an important way to compare tip speeds of refrigerants.

30

The table below shows theoretical tip speeds that are calculated for 1,2,2-trichlorotrifluoroethane (CFC-113) and 3-ethylpentane of the present invention. The conditions assumed for this comparison are:

5	Evaporator temperature	40.0°F (4.4°C)
	Condenser temperature	110.0°F (43.3°C)
	Subcool temperature	10.0°F (5.5°C)
	Return gas temperature	75.0°F (23.8°C)
	Compressor efficiency is	70%

- 10 These are typical conditions under which small turbine centrifugal compressors perform.

TABLE 6

Refrigerant Composition	Wt% C ₄ F ₉ OCH ₃	Wt% B	Hi Btu/lb	Hi*0.7 Btu/lb	Hi*0.7 KJ/Kg	V2 m/s	V2 rel to CFC-113
CFC-113			10.92	7.6	17.8	133.3	na
C₄F₉OCH₃ plus B:							
N(CH ₃) ₂ (CHF ₂)	41.1	58.9	15.71	11.0	25.6	159.9	120%
diisopropyl ether	75.5	24.5	15.82	11.1	25.8	160.5	120%
dimethoxymethane	56.3	43.7	16.72	11.7	27.2	165.0	124%
ethyl acetate	87.8	12.2	13.57	9.5	22.1	148.6	112%
ethyl formate	68.6	31.4	14.78	10.3	24.1	155.1	116%
methanol	97.1	2.9	13.21	9.2	21.5	146.7	110%
methyl acetate	72.1	27.9	13.77	9.6	22.4	149.7	112%
methyl formate	57.4	42.6	14.26	10.0	23.2	152.4	114%
tert-butyl methyl ether	66.6	33.4	16.99	11.9	27.7	166.3	125%
trans-DCE	54.6	45.4	11.57	8.1	18.8	137.3	103%

- 15 The Example shows that compounds of the present invention have tip speeds within about +/- 30 percent of CFC-113 and would be effective replacements for CFC-113 with minimal compressor design changes. Most preferred compositions have tip speeds within about +/- 15 percent of CFC-113.

20

EXAMPLE 3
Performance Data

The table below shows the performance of various refrigerants compared to CFC-113. The data are based on the following conditions.

Evaporator temperature 40.0°F (4.4°C)
 Condenser temperature 110.0°F (43.3°C)
 Subcool temperature 10.0°F (5.5°C)
 Return gas temperature 75.0°F (23.8°C)
 Compressor efficiency is 70%

5

TABLE 7

<u>Composition</u>	<u>wt%</u> <u>C₄F₉OCH₃</u>	<u>wt%</u> <u>B</u>	<u>Evap</u> <u>Pres</u> <u>(Psia)</u>	<u>Evap</u> <u>Pres</u> <u>(kPa)</u>	<u>Cond</u> <u>Pres</u> <u>(Psia)</u>	<u>Cond</u> <u>Pres</u> <u>(kPa)</u>	<u>Comp</u> <u>Disch</u> <u>Temp</u> <u>(F)</u>	<u>Comp</u> <u>Disch</u> <u>Temp</u> <u>(C)</u>	<u>COP</u>	<u>Capacity</u> <u>(Btu/min)</u>	<u>Capacity</u> <u>(kW)</u>
CFC-113			2.7	19	12.8	88	156.3	69.1	14.8	4.18	0.26
C ₄ F ₉ OCH ₃ plus B:											
N(CH ₃) ₂ (CHF ₂)	41.1	58.9	2.6	18	12.7	88	156.1	68.9	4.20	16.8	0.29
diisopropyl ether	75.5	24.5	1.9	13	10.1	69	133.5	56.4	3.97	12.1	0.21
dimethoxy- methane	56.3	43.7	3.1	21	15.4	106	153.5	67.5	4.16	20.0	0.35
ethyl acetate	87.8	12.2	1.6	11	8.8	60	138.9	59.4	4.04	10.5	0.18
ethyl formate	68.6	31.4	3.1	22	15.8	109	153.3	67.4	4.11	20.0	0.35
methanol	97.1	2.9	1.4	10	8.4	58	141.6	60.9	4.06	9.8	0.17
methyl acetate	72.1	27.9	3.0	21	14.9	103	153.6	67.6	4.08	18.9	0.33
methyl formate	57.4	42.6	5.4	37	26.1	180	176.9	80.5	4.10	34.1	0.60
tert-butyl methyl ether	66.6	33.4	2.2	15	10.9	75	138.0	58.9	4.03	13.5	0.24
trans-DCE	54.6	45.4	3.3	23	15.9	109	169.9	76.6	4.21	21.2	0.37

Data show the compositions of the present invention have

- 10 evaporator and condenser pressures similar to CFC-113. Some compositions also have higher capacity or energy efficiency than CFC-113.

15

CLAIM(S)

What is claimed is :

1. A refrigerant or heat transfer fluid composition comprising
C₄F₉OCH₃ and at least one compound selected from the group consisting
5 of:
N-(difluoromethyl)-N,N-dimethylamine;
diisopropyl ether;
dimethoxymethane;
ethyl acetate;
10 ethyl formate;
methanol;
methyl acetate;
methyl formate;
tert-butyl methyl ether;
15 trans-1,2-dichloroethylene; and
C₄F₉OC₂H₅ and trans-1,2-dichloroethylene.
2. A refrigerant or heat transfer fluid composition suitable for use in
refrigeration apparatus or air-conditioning apparatus employing (i)
20 centrifugal compressor or (ii) multi-stage centrifugal compressor or (iii)
single slab/single pass heat exchanger, said composition comprising
C₄F₉OCH₃ and at least one compound selected from the group consisting
of:
N-(difluoromethyl)-N,N-dimethylamine;
25 diisopropyl ether;
dimethoxymethane;
ethyl acetate;
ethyl formate;
methanol;
30 methyl acetate;
methyl formate;
tert-butyl methyl ether;
trans-1,2-dichloroethylene; and
C₄F₉OC₂H₅ and trans-1,2-dichloroethylene.
- 35 3. An azeotropic or near-azeotropic composition comprising:

- about 1 to about 99 weight percent $C_4F_9OCH_3$ and about 99 to about 1 weight percent N-(difluoromethyl)-N,N-dimethylamine;
about 1 to about 84 weight percent $C_4F_9OCH_3$ and about 99 to about 16 weight percent dimethoxymethane;
5 about 58 to about 99 weight percent $C_4F_9OCH_3$ and about 42 to about 1 weight percent ethyl acetate;
about 46 to about 86 weight percent $C_4F_9OCH_3$ and about 54 to about 14 weight percent ethyl formate;
about 49 to about 87 weight percent $C_4F_9OCH_3$ and about 51 to about 13 weight percent methyl acetate;
10 about 37 to about 83 weight percent $C_4F_9OCH_3$ and about 63 to about 17 weight percent methyl formate; or
about 10 to about 70 weight percent $C_4F_9OCH_3$, about 5 to about 60 weight percent $C_4F_9OC_2H_5$, and about 25 to about 80 weight percent trans-1,2-dichloroethylene.
15
4. An azeotropic composition comprising:
41.1 weight percent $C_4F_9OCH_3$ and 58.9 weight percent N-(difluoromethyl)-N,N-dimethylamine having a vapor pressure of
20 about 14.7 psia (101 kPa) at a temperature of about 47.5 °C;
56.3 weight percent $C_4F_9OCH_3$ and 43.7 weight percent dimethoxymethane having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 42.0 °C;
87.8 weight percent $C_4F_9OCH_3$ and 12.2 weight percent ethyl acetate having a vapor pressure of about 14.7 psia (101 kPa) at a
25 temperature of about 57.9 °C;
68.6 weight percent $C_4F_9OCH_3$ and 31.4 weight percent ethyl formate having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 41.0 °C;
72.1 weight percent $C_4F_9OCH_3$ and 27.9 weight percent methyl acetate having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 42.5 °C; or
30 57.4 weight percent $C_4F_9OCH_3$ and 42.6 weight percent methyl formate having a vapor pressure of about 14.7 psia (101 kPa) at a temperature of about 26.0 °C.
35


5. A process for producing cooling, said process comprising evaporating the composition of claim 1, 2, 3, or 4 in the vicinity of a body to be cooled, and thereafter condensing said composition.
- 5 6. A process for producing heat, said process comprising condensing the composition of claim 1, 2, 3, or 4 in the vicinity of a body to be heated, and thereafter evaporating said composition.
7. A method of using the compositions of claim 1, 2, 3, or 4, for heat
10 transfer, said method comprising transferring said composition from a heat source to a heat sink.
8. The composition of claim 1, further comprising at least one ultra-violet fluorescent dye selected from the group consisting of
15 naphthalimides, perylenes, coumarins, anthracenes, phenanthracenes, xanthenes, thioxanthenes, naphthoxanthenes, fluoresceins, and derivatives thereof.
9. The composition of claim 8, further comprising at least one
20 solubilizing agent selected from the group consisting of hydrocarbons, dimethylether, polyoxyalkylene glycol ethers, amides, ketones, nitriles, chlorocarbons, esters, lactones, aryl ethers, fluoroethers, and 1,1,1-trifluoroalkanes; and wherein the refrigerant or heat transfer fluid may not be the same compound as the solubilizing agent.
- 25 10. The composition of claim 9, wherein said solubilizing agent is selected from the group consisting of:
- a) polyoxyalkylene glycol ethers represented by the formula
30 $R^1[(OR^2)_xOR^3]_y$, wherein: x is an integer from 1 to 3; y is an integer from 1 to 4; R^1 is selected from hydrogen and aliphatic hydrocarbon radicals having 1 to 6 carbon atoms and y bonding sites; R^2 is selected from aliphatic hydrocarbylene radicals having from 2 to 4 carbon atoms; R^3 is selected from hydrogen, and aliphatic and alicyclic hydrocarbon radicals
35 having from 1 to 6 carbon atoms; at least one of R^1 and R^3 is selected from said hydrocarbon radicals; and wherein said

polyoxyalkylene glycol ethers have a molecular weight of from about 100 to about 300 atomic mass units;

- 5 b) amides represented by the formulae $R^1CONR^2R^3$ and cyclo- $[R^4CON(R^5)-]$, wherein R^1 , R^2 , R^3 and R^5 are independently selected from aliphatic and alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms, and at most one aromatic radical having from 6 to 12 carbon atoms; R^4 is selected from aliphatic hydrocarbylene radicals having from 3 to 12 carbon atoms; and wherein said amides have a molecular weight of from about 100 to about 300 atomic mass units;
- 10 c) ketones represented by the formula R^1COR^2 , wherein R^1 and R^2 are independently selected from aliphatic, alicyclic and aryl hydrocarbon radicals having from 1 to 12 carbon atoms, and wherein said ketones have a molecular weight of from about 70 to about 300 atomic mass units;
- 15 d) nitriles represented by the formula R^1CN , wherein R^1 is selected from aliphatic, alicyclic or aryl hydrocarbon radicals having from 5 to 12 carbon atoms, and wherein said nitriles have a molecular weight of from about 90 to about 200 atomic mass units;
- 20 e) chlorocarbons represented by the formula RCI_x , wherein; x is selected from the integers 1 or 2; R is selected from aliphatic and alicyclic hydrocarbon radicals having from 1 to 12 carbon atoms; and wherein said chlorocarbons have a molecular weight of from about 100 to about 200 atomic mass units;
- 25 f) aryl ethers represented by the formula R^1OR^2 , wherein: R^1 is selected from aryl hydrocarbon radicals having from 6 to 12 carbon atoms; R^2 is selected from aliphatic hydrocarbon radicals having from 1 to 4 carbon atoms; and wherein said aryl ethers have a molecular weight of from about 100 to about 150 atomic mass units;
- 30 g) 1,1,1-trifluoroalkanes represented by the formula CF_3R^1 , wherein R^1 is selected from aliphatic and alicyclic hydrocarbon radicals having from about 5 to about 15 carbon atoms;
- 35 h) fluoroethers represented by the formula $R^1OCF_2CF_2H$, wherein R^1 is selected from aliphatic and alicyclic hydrocarbon radicals having from about 5 to about 15 carbon atoms; or wherein said

fluoroethers are derived from fluoro-olefins and polyols,
 wherein said fluoro-olefins are of the type $\text{CF}_2=\text{CXY}$, wherein X
 is hydrogen, chlorine or fluorine, and Y is chlorine, fluorine, CF_3
 or OR_f , wherein R_f is CF_3 , C_2F_5 , or C_3F_7 ; and said polyols are
 5 linear or branched, wherein said linear polyols are of the type
 $\text{HOCH}_2(\text{CHOH})_x(\text{CRR}')_y\text{CH}_2\text{OH}$, wherein R and R' are
 hydrogen, CH_3 or C_2H_5 , x is an integer from 0-4, y is an integer
 from 0-3 and z is either zero or 1, and said branched polyols
 are of the type $\text{C}(\text{OH})_t(\text{R})_u(\text{CH}_2\text{OH})_v[(\text{CH}_2)_m\text{CH}_2\text{OH}]_w$, wherein
 10 R may be hydrogen, CH_3 or C_2H_5 , m is an integer from 0 to 3, t
 and u are 0 or 1, v and w are integers from 0 to 4, and also
 wherein $t + u + v + w = 4$;

i) lactones represented by structures [B], [C], and [D]:

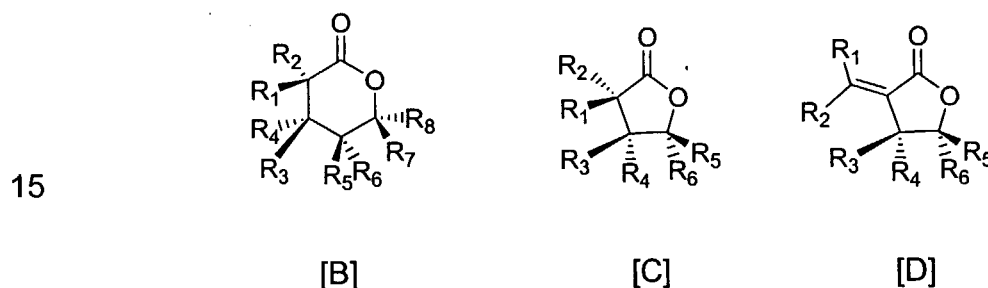

20 wherein, R_1 through R_8 are independently selected from
 hydrogen, linear, branched, cyclic, bicyclic, saturated and
 unsaturated hydrocarbyl radicals; and the molecular weight is
 from about 100 to about 300 atomic mass units; and

j) esters represented by the general formula $\text{R}^1\text{CO}_2\text{R}^2$, wherein
 R^1 and R^2 are independently selected from linear and cyclic,
 25 saturated and unsaturated, alkyl and aryl radicals; and wherein
 said esters have a molecular weight of from about 80 to about
 550 atomic mass units.

11. A method for introducing an ultraviolet fluorescent dye into a
 30 compression refrigeration or air-conditioning apparatus, said method
 comprising dissolving the ultraviolet fluorescent dye in the composition of
 claim 1, 2, 3, or 4, in the presence of a solubilizing agent, and introducing
 the combination into said compression refrigeration or air-conditioning
 apparatus.

12. A method for solubilizing ultraviolet fluorescent dye in the composition of claim 1, 2, 3, or 4, said method comprising contacting the ultraviolet fluorescent dye with said composition, in the presence of a
5 solubilizing agent.

13. A method for detecting leaks, said method comprising providing a compression refrigeration apparatus or air-conditioning apparatus, introducing the composition of claim 8 or 9 into said apparatus, and
10 providing a suitable means for detecting said composition in the vicinity of said apparatus.

14. A method of producing cooling, said method comprising: evaporating the refrigerant or heat transfer fluid component of the composition of claim 8 in the vicinity of a body to be cooled and thereafter
15 condensing said refrigerant or heat transfer fluid component.

15. A method of producing heat, said method comprising: condensing the refrigerant or heat transfer fluid component of the composition of claim
20 8 in the vicinity of the body to be heated and thereafter evaporating said refrigerant or heat transfer fluid component.

16. The composition of claim 1, 2, 3, or 4 further comprising a stabilizer, water scavenger, or odor masking agent.
25

17. The composition of claim 16 wherein said stabilizer is selected from the group consisting of nitromethane, hindered phenols, hydroxylamines, thiols, phosphites and lactones.

30 18. A method of using the composition of claim 1, 2, 3, or 4, wherein said method comprises producing heat or cooling in a refrigeration or air-conditioning apparatus employing a multi-stage centrifugal compressor.

19. The method of claim 18 wherein said multi-stage centrifugal
35 compressor is a two-stage centrifugal compressor.

20. The composition of claim 16 wherein said water scavenger is an ortho ester.

5 21. A process to produce cooling comprising compressing a composition of claim 1, 2, 3, or 4 in a mini-centrifugal compressor powered by an engine exhaust gas driven turbine; condensing said composition; and thereafter evaporating said composition in the vicinity of a body to be cooled.

10 22. A process to produce cooling comprising compressing a composition of claim 1, 2, 3, or 4 in a mini-centrifugal compressor powered by a ratioed gear drive assembly with a ratioed belt drive; condensing said composition; and thereafter evaporating said composition in the vicinity of a body to be cooled.

15 23. A method for replacing CFC-113 in existing refrigeration apparatus or air-conditioning apparatus, said method comprising providing a composition of claim 1, 2, 3, or 4 as the replacement.