

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 March 2007 (01.03.2007)

PCT

(10) International Publication Number
WO 2007/023258 A1

(51) International Patent Classification:
B31F 1/10 (2006.01)

(74) Agent: **SERJEANTS**; 25 The Crescent, King Street, Leicester, LE1 6RX (GB).

(21) International Application Number:
PCT/GB2006/003057

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 16 August 2006 (16.08.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0517115.2 20 August 2005 (20.08.2005) GB

(71) Applicant (for all designated States except US):
TECH-NI-FOLD LTD [GB/GB]; 7 Elliot Close, Whetstone, Leicester, LE8 6QX (GB).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HARRIS, Graham** [GB/GB]; 7 Elliot Close, Whetstone, Leicester, LE8 6QX (GB). **BARRETT, Paul, Graham** [GB/GB]; c/o Tech-ni-Fold Ltd, 7 Elliot Close, Whetstone, Leicester, LE8 6QX (GB).

[Continued on next page]

(54) Title: DRUM FOR A CREASING DEVICE

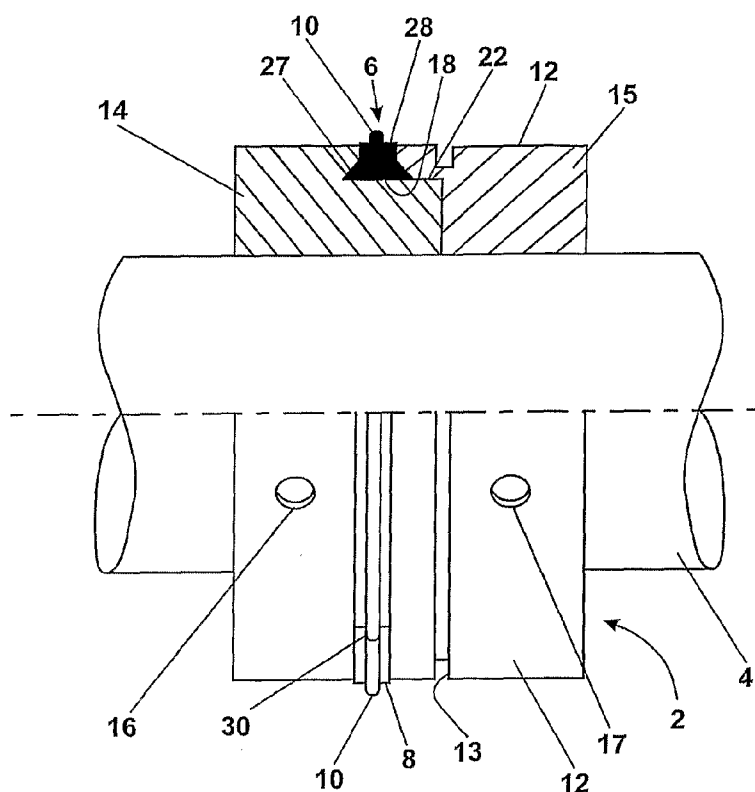

(57) Abstract: A drum (2) for mounting the resilient creasing ring (8) of a creasing device is formed in two parts (14, 15), each having a cylindrical outer surface (12) and a bore for mounting the drum part about a shaft (4). The first and second drum parts (14, 15) are shaped such that they may abut one another to define between them the base (18) and two side walls (20, 21) of a channel (6) for receiving the resilient creasing ring (8). At least one side wall (20, 21) of the channel (6) is recessed so that a resilient creasing ring (8) located in the channel (6) and projecting laterally into the recess cannot be withdrawn radially from the channel (6). As a result, it is no longer required that the ring (8) be under tension to hold it in place so a split ring (8) can be used and replacement rings can be added to the device without removing the shaft (4) from the machine in which it is mounted.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.