

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
03 July 2025 (03.07.2025)



(10) International Publication Number
WO 2025/141071 A1

(51) International Patent Classification:
G02B 27/62 (2006.01)

(21) International Application Number:
PCT/EP2024/088448

(22) International Filing Date:
24 December 2024 (24.12.2024)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
23307389.9 26 December 2023 (26.12.2023) EP

(71) Applicant: **PASQAL** [FR/FR]; 24 Rue Emile Baudot,
91120 PALAISEAU (FR).

(72) Inventor: **DUTARTRE, Sylvain**; c/o PASQAL 24 RUE
EMILE BAUDOT, 91120 PALAISEAU (FR).

(74) Agent: **ROCHER, Olivier** et al.; LAVOIX, 2, place d'Esti-
enne d'Orves, 75441 PARIS CEDEX 09 (FR).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,

(54) Title: OPTICAL CALIBRATION SYSTEM AND ALIGNMENT METHOD

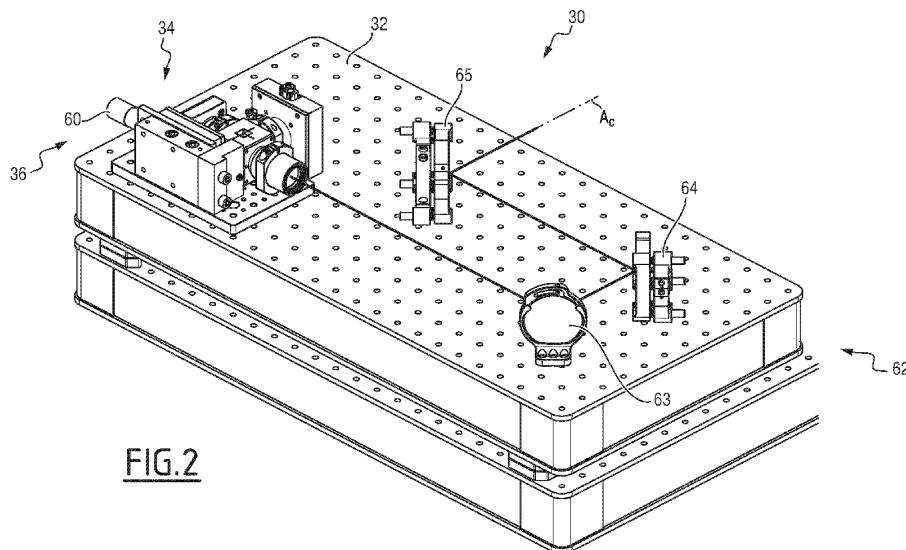


FIG.2

(57) Abstract: The invention relates to an optical calibration system (30), comprising: - a support (32), - an imaging device (34) mounted on the support (32), the imaging device (34) comprising: • a camera comprising an image generation unit and an objective, • a collimation unit suitable to emit a collimated beam conveying an image of a so-called collimation object, the imaging device (34) being selectively switchable between two modes of operation among: • an autocollimation mode in which both the image generation unit and the collimation unit are activated, and • an imagery mode in which only the image generation unit is activated.

[Continued on next page]

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed
contained color or greyscale and is available for download
from PATENTSCOPE*