

METAL GASKET

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 This invention relates to a metal gasket for obtaining high air-tightness resulting from pressing on seal face of a sealing portion on which the metal gasket is placed.

2. Description of Related Art

10 In the manufacturing process of semiconductor, processes for thermodiffusing ultra-toxic gases such as silane, arsine, phosphine, and diborane on a silicon wafer base as impurity source have been employed and spontaneous-ignitable gases have been used.

15 Such gases used in the manufacturing process of semiconductor involves the risk of direct physical injury, for example, the lethal dose of arsine is 0.5 ppm and a little leakage of the gas causes physical injury, conventionally piping for such gas has been jointed by welding or sealing
20 using a gasket for preventing leakage. Because such gases are usually toxic and also corrosive, a gasket consisting of rubber or resin can not be used and a metal gasket has been used for gasket sealing.

25 For equipments for manufacturing of semiconductors which involves handling of such hazardous gas, various metal gaskets has been proposed and used for high air-tightness. The conventional metal gasket will be described referring examples

herein under.

Fig. 6 is a perspective view for illustrating the first conventional example of a metal gasket. The metal gasket 51 comprises a metal sheath with two layered structure having inside-sheath 53 and outside-sheath 54 with a cross-section in the form of C-shape provided adjacent each other in the axial direction and a metal core 52 comprising an elastic metal coil spring in the form of ring shape provided on the inside of the inside-sheath 53.

Otherwise, the second example of a conventional metal gasket disclosed in Japanese Unexamined Patent Publication No. Hei 2-138575 is shown in Fig. 7. The metal gasket 61 comprises a metal core 62 comprising a ring hollow elastic metal coil spring with an elliptic cross-section and an outside single-layered metal sheath 63 with a C-shaped cross-section surrounding the peripheral surface of the metal core 62 continuous in the axial direction.

When a gasket 61 having such a structure receives a compression force exceeding a prescribed value from the bracket 60 in the minor axis direction, the top and bottom sides deflect at the central portions to form arched surfaces 64 and 64 respectively as shown in Fig. 8, and two circles 65 and 66 between the arched surfaces 64 and 64 are served to seal the top and bottom faces. High sealing effect is exhibited by doubled sealing lines.

However, recently it is desirable to use austenite stainless steel, particularly SUS316 (referred to as merely

SUS hereinafter), for it is excellent in corrosion resistance as sheath material of metal gaskets in stead of nickel for it can generate poison through reaction with a gas, however, SUS is disadvantageous in that the stability of sealing is poor.

5 The reason is described herein under. SUS316 has the hardness of as high as about Hv 320 in comparison with the hardness of nickel on the outside sheath surface of Hv 180. On the other hand, a flange on which the metal gasket is to be mounted has the hardness of about Hv 300 because the flange is
10 formed of SUS316 or VIM-VAR material subjected to burnishing surface processing.

 Accordingly, when a sheath consisting of nickel is used and there is hardness difference between a flange and the sheath, the sealing portion is strained on the sealing face of
15 the bracket to make sure the air-tightness.

 However, when there is no hardness difference between a flange and the sheath because high hardness material such as SUS is used for the sheath, the metal gasket is not strained to fit evenly on the sealing face, the stability of sealing is
20 poor, and the poor sealing is a problem.

 When there is hardness difference between a flange and the sheath because nickel is used for the sheath, the sheath is pressed on the sealing face with high pressure to cause strain, the material of the sheath is forced to penetrate into
25 the sealing face of the flange to enhance the air-tightness.

 However, when there is no hardness difference between the sheath of high hardness material such as SUS and a flange,

because both the gasket of the first example with a circular cross-section and of the second example which forms double sealing lines with elliptic cross-section contact with a bracket on the curved surface to render increased contact surface area relatively and such contact between surfaces involves low areal pressure, the material of the sheath is not forced to penetrate to the sealing face not to enhance the air-tightness, it is disadvantageous in that the stability of sealing is poor.

Therefore, a very high pressing force is required to enhance the sealing stability.

It is the object of the present invention to provide a metal gasket excellent in sealing stability without such problem and capable of effectively preventing fluid from leakage with a reduced pressing force.

SUMMARY OF THE INVENTION

A metal gasket comprises at least one metal sheath with a C-shaped cross-section and a ring elastic core surrounded by the metal sheath, and is used for preventing leakage of fluid with aid of contact with the sealing face tightened by being exerted with a force in the axis center direction, wherein the metal sheath has a thin walled portion formed thin locally on the periphery of the metal sheath, and when a force is exerted to the metal sheath to deform, the deflection in the axis center direction caused by the stress concentration on the thin walled portion causes to form projections at the both

sides of the deflection which projections are pressed onto the sealing face to prevent leakage of fluid.

5 The metal gasket of the present invention has the above-mentioned thin walled portions on both sides of the above-mentioned metal sheath in the above-mentioned metal gasket.

The metal gasket of the present invention has a flat thin walled portion of the above-mentioned metal sheath in the above-mentioned metal gasket.

10 The metal gasket of the present invention has a worked portion of the above-mentioned metal sheath with U-shaped, V-shaped, or J-shaped cross-section in the above-mentioned metal gasket.

15 A metal gasket of the present invention having the above-mentioned structure functions as described herein under.

When the metal gasket is provided on the portion to be sealed and pressed by a force in the axis center direction, the stress concentration on the thin walled portion formed on the metal sheath causes the deflection and deformation of the thin walled portion. The deflection in the axis center direction of the metal sheath due to stress concentration causes to form projections at the both sides of the deflection which projections mark double sealing lines as the result of the contact. Because the edge of a projection is pressed onto the sealing face on each sealing line, the areal pressure at the tip of the edge is high and such high areal pressure is favorable for preventing leakage of fluid.

20

25

In other words, the metal gasket forms double sealing lines, the tip of the sealing line contacts onto the sealing face with high contact pressure to provide the sealing stability.

5 The metal gasket of the present invention having the above-mentioned worked portion with a flat face worked to form a locally thin portion is pressed to form projections at the both sides of the deflection in the axis center direction at the middle portion of the locally flat thin portion, and the
10 double sealing line which is in contact on the sealing face with a high contact pressure favors the sealing stability.

The flat face can be formed simply by cutting the end of the metal sheath, manufacturing cost is therefore low.

15 The metal gasket of the present invention has a metal sheath having the above-mentioned worked portion with a U-shaped, V-shaped, or J-shaped groove cross-section worked to form a local thin portion, and the compression exerted to the metal gasket causes to form projections at the both sides of the deflection which is formed by deflecting in the axis
20 center direction the thin portion at the recessed middle portion of the J-shaped groove, or the bottom of U-shaped or V-shaped groove of the above-mentioned worked portion, thus the double sealing lines which are in contact with the sealing face with a high pressure favors the sealing stability.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view for illustrating the first

embodiment of a metal gasket in accordance with the present invention.

Fig. 2 is a cross-sectional view for illustrating a profile during sealing of the metal gasket of the first embodiment.

Fig. 3 is a plan view of a profile after sealing of the metal gasket of the first embodiment.

Fig. 4 is a cross-sectional perspective view for illustrating the second embodiment of a metal gasket in accordance with the present invention.

Fig. 5 is a cross-sectional view for illustrating a profile during sealing of a metal gasket of the second embodiment.

Fig. 6 is a cross-sectional view for illustrating the first example of the conventional metal gasket.

Fig. 7 is a cross-sectional view for illustrating the second example of the conventional metal gasket.

Fig. 8 is a cross-sectional view for illustrating a profile during sealing of the metal gasket of the second example.

Fig. 9 is a photograph for illustrating a condition after sealing of the flat face of the metal gasket of the first embodiment in accordance with the present invention observed by a microscope.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Next, embodiments of metal gaskets in accordance with the

present invention will be described hereinafter referring to the drawings. Fig. 1 is a cross-sectional perspective view for illustrating a metal gasket 1 of the first embodiment. The metal gasket 1 comprises a sheath 3 which is continuous in the axial direction and has a C-shaped cross-section, and a ring elastic metal coil spring 2 which is surrounded by the sheath 3. The metal gasket 1 of this embodiment is featured by the sheath 3, that is, flat faces 5 and 5 are formed over the whole length of the metal gasket 1 at the top and bottom symmetrically with respect to the opening 4 of the sheath 3 with C-shaped cross-section. The sheath 3 is formed of SUS316 with a hardness of about 320 Hv.

Such a metal gasket 1 is placed on a flange to be sealed and compressed, and the profile of the metal gasket under such condition is shown in Fig. 2. When the metal gasket 1 is placed on the sealing faces 10a and 10a of the flange 10, the flat faces 5 and 5 are brought into contact with the sealing faces 10a and 10a. When the flat faces 5 and 5 facing each other receive a compression force from the flange 10, the metal gasket 1 is deformed in the axis center direction.

When, because the sheath 3 exerted with a force from the flange 10 is structured so that the center portions 5 and 5 are formed thinnest and the portions farther from the center are formed thicker, the force is exerted onto the central portions 5a and 5a to cause local stress concentration. Thus, the sheath 3 is deflected and curved in the axis center direction namely the direction of the force at the central

portions 5a and 5a as the result of the stress concentration, and the edges 5b and 5b of the flat faces 5 and 5 become projections 6 and 6... between the central portions 5a and 5a. The projections 6 and 6... are obtained along the whole length of the metal gasket 1 to render the double sealing of the sealing faces 10a and 10a of the flange.

By the way, the sealing face of the flange 10 at the portion where the projections 6 and 6 obtained by compression deformation had contacted is tested. A photograph of the flat face of the metal gasket after sealing is shown in Fig. 9. Fig. 3 is a plan view of the metal gasket 1 after sealing which is the schematic description of Fig. 9.

As shown in the photograph of Fig. 9 and in Fig. 3, the metal gasket 1 comprises a coil spring 2 surrounded by the sheath 3, and the flat portions 5 and 5 are formed by cutting the top and bottom portions for sealing. Such metal gasket is mounted on the flange 10 and taken out to observe, it is found clearly that there are circular outside and inside double sealing prints 8 and 8 at the positions corresponding to the edges formed on the flat face 5.

Accordingly, it is confirmed that the metal gasket 1 of the embodiment seals the sealing faces 10a and 10a with aid of the projections 6 and 6... formed by compression because of the existence of worked flat faces 5 and 5.

The metal gasket 1 of the embodiment is applied to the case that the sealing face 10a and 10a of a flange are subjected to super roll processing to render smooth surface

with reduced pit and to the case that the sealing face 10a and 10a of a flange are not subjected to super roll processing, and the test is repeated a plurality of times for testing the leakage of helium to the outside after 30 seconds from blowing of helium, the result shows no outside leakage for all tests. The hardness of the flanges 10 is all about 300 Hv and the detection sensitivity is 2.8×10^{-12} Pa·m³/s or lower.

Accordingly, because the sharp projections 6, 6... contact on the sealing faces 10a and 10a at the small area for sealing with aid of the projection 6, 6 ... using the metal gasket 1 of the embodiment, the high pressing force is applied evenly on the contact areas, the face with not only smooth surface but also rough surface is sealed stably.

High air-tightness is obtained by sealing line of the projections 6, 6... formed double.

Further, the metal gasket contacts on the sealing faces 10a and 10a only on the double sealing lines formed by the projections 6, 6... with a small contact area, and because of the small contact area, high contact pressure can be obtained with a small tightening force to be exerted on the flange 10 which exerts a force to press the metal gasket.

On the other hand, the use of the flange 10 consists of a soft material with a hardness of 120 to 130 Hv causes to form a permanent sealing print on the sealing faces 10a and 10a.

Repeated attaching and detaching of the metal gasket will happen to cause crossing of sealing prints. However, no leakage is resulted even after repeated use because of high

pressure pressing with the projections 6, 6... and double sealing lines.

Next, the second embodiment of a metal gasket in accordance with the present invention will be described herein under. Fig. 4 is a cross-sectional perspective view for illustrating a metal gasket 21 of the second embodiment. Likewise the configuration of the first embodiment, this gasket 21 also comprises a sheath 23 with a C-shaped cross-section and a coil spring 22 which is surrounded by the sheath 23. The sheath 23 features the metal gasket 21 of this embodiment, V-shaped grooves 25 and 25 are formed over the whole length of the metal gasket 21 at the top and bottom symmetrically with respect to the opening 24 of the sheath 23 with C-shaped cross-section.

When a metal gasket 21 on which such V-shaped grooves 25 and 25 are formed is mounted on a flange 10, projections 26 and 26... is formed as shown in Fig. 5 to ensure the sealing.

In detail, when a metal gasket 21 is provided on a flange 10 and a compression force is exerted from the flange 10 to the top and bottom V-shaped grooves, the metal gasket 21 is deformed to the axis center direction. When, because the V-shaped groove 25 and 25 which is directly exerted with the force is thinnest at the central portions 25a and 25a, the places are subjected to stress concentration.

Accordingly, as shown in Fig. 5, the central portions 25a and 25a which is subjected to the stress concentration of the sheath 23 are deflected and curved in the axis center

direction. Thus, the edges 25b and 25b ... of the V-shaped grooves 25 and 25 are projected to form projections 26, 26... between the central portions 25a and 25a. The sharp projections 26, 26... ensure the double sealing on the sealing faces 10a and 10a of the flange 10.


In the metal gasket 21 of the embodiment, the forming of worked V-shaped grooves 25 and 25 allows the projections 26 and 26 to be sharper than those in the first embodiment, and the stability is enhanced more. In other words, the tightening of the metal gasket 21 with smaller pressing force is sufficient for sealing.

The metal gasket of the invention is not limited to the embodiments described hereinbefore, various modifications may be applied within the scope of the present invention.

For example, in the embodiments described hereinbefore, only flat face and V-shaped groove are shown as the configuration of the worked portion formed on the sheath, however, the worked portion may be a worked portion with J-shaped, U-shaped cross-section, or other shaped cross-section as described in the claims as far as the shape forms a thin portion for favoring the projection when compressed.

Further, for example, the metal gasket comprising one layered sheath is shown in the embodiments described hereinbefore, however, the sheath may comprises a two layered sheath as shown in the first embodiment or a sheath with more layers.

This invention provides a metal gasket, even with high hardness, excellent in sealing stability and capable of sealing with small pressing force because of the structure that the worked portion to provide local thinned portions on a metal sheath over the whole length, and the deflection to the axis direction of the sheath due to concentrated stress on the thin worked portion when the metal sheath is exerted with a force and deformed causes projections at the both sides of the deflection which projections are pressed onto the sealing face.



WHAT IS CLAIMED IS:

THIS SHEET HAS BEEN
REPLACED

1. A metal gasket comprising at least one metal sheath with
a C-shaped cross-section and a ring elastic core surrounded by
said metal sheath for preventing leakage of fluid with aid of
contact with the sealing face tightened by being exerted with
a force in the axis center direction,

wherein said metal sheath has a thin walled portion formed
thin locally on the periphery of said metal sheath, and

when a force is exerted to said metal sheath to deform,
the deflection in the axis center direction caused by the
stress concentration on said thin walled portion causes to
form projections at the both sides of the deflection which
projections are pressed onto said sealing face to prevent
leakage of fluid.

2. The metal gasket as claimed in claim 1, wherein said thin
walled portion is formed on both sides of said metal gasket.

3. The metal gasket as claimed in claim 1, wherein said thin
walled portion of said metal sheath is a flat face.

4. The metal gasket as claimed in claim 2, wherein said thin
walled portion of said metal sheath is a flat face.

5. The metal gasket as claimed in claim 1, wherein said
worked portion of said metal sheath has a U-shaped, V-shaped,



or]-shaped cross-section.

THIS SHEET HAS BEEN
REPLACED

6. The metal gasket as claimed in claim 2, wherein said
worked portion of said metal sheath has a U-shaped, V-shaped,
5 or]-shaped cross-section.

This Sheet Has Been Replaced



* C L H S *

ABSTRACT OF THE DISCLOSURE

A metal gasket excellent in sealing performance and capable of sealing with a small pressing force. The metal gasket comprises at least one metal sheath with C-shaped cross-section and a ring elastic core surrounded by the metal sheath and the metal gasket is served for sealing with aid of the contact with the sealing face tightened by exerting a force in the axis center direction, wherein the metal sheath has the worked portion with a locally thin cross-section over the whole length, and when the metal sheath is exerted with a force and deformed, the deflection in the axis direction of the metal sheath due to concentrated stress on the thin worked portion causes to form projections at the both sides of the deflection which projections are pressed onto the sealing face.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



FIG. 1


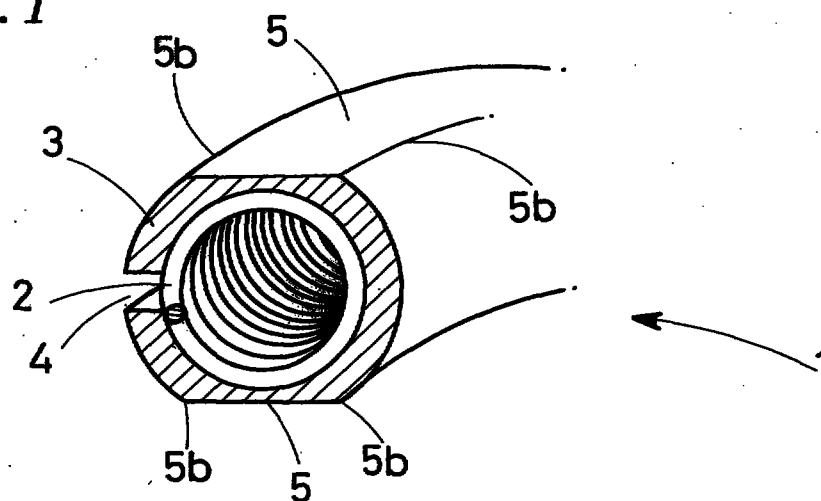



FIG. 2

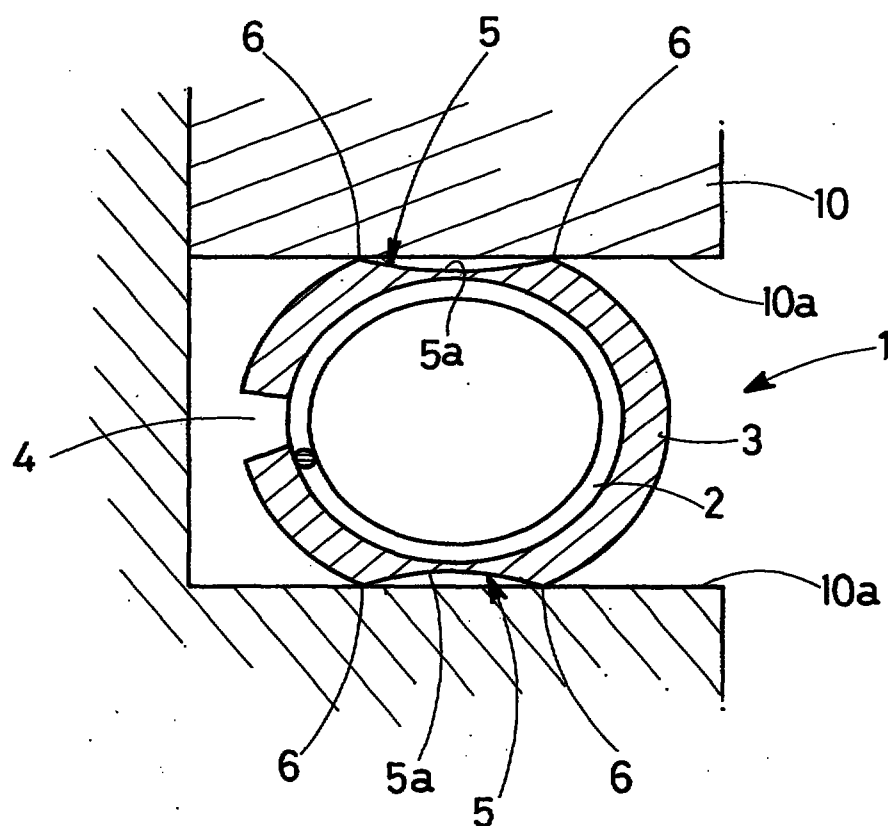

This Sheet Has Been Replaced



FIG. 3

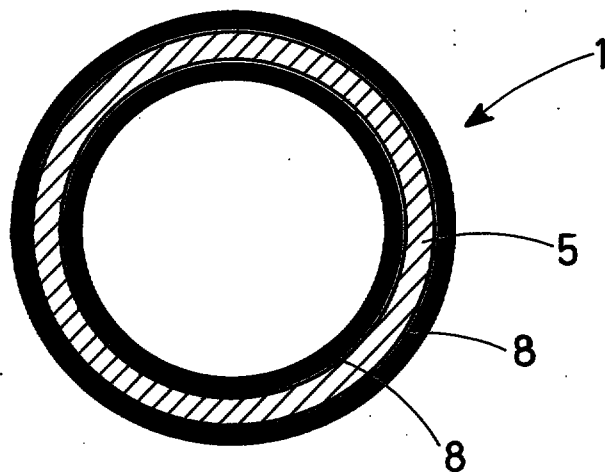

This Sheet Has Been Replaced



FIG. 4


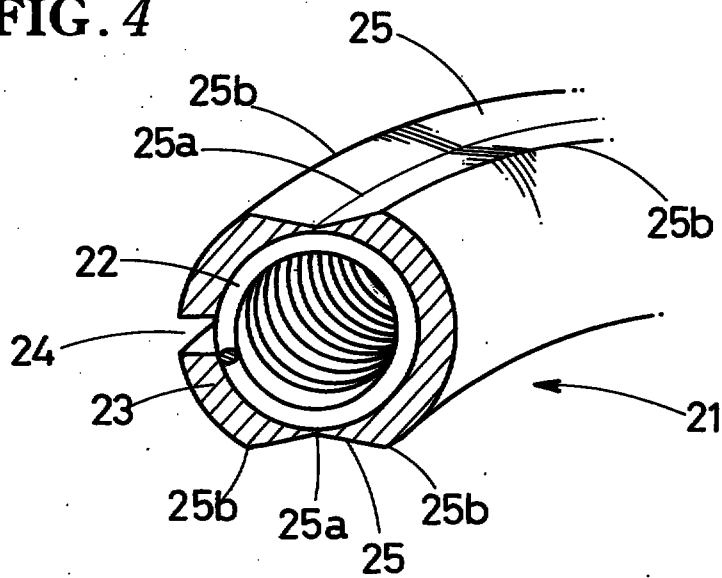


FIG. 5

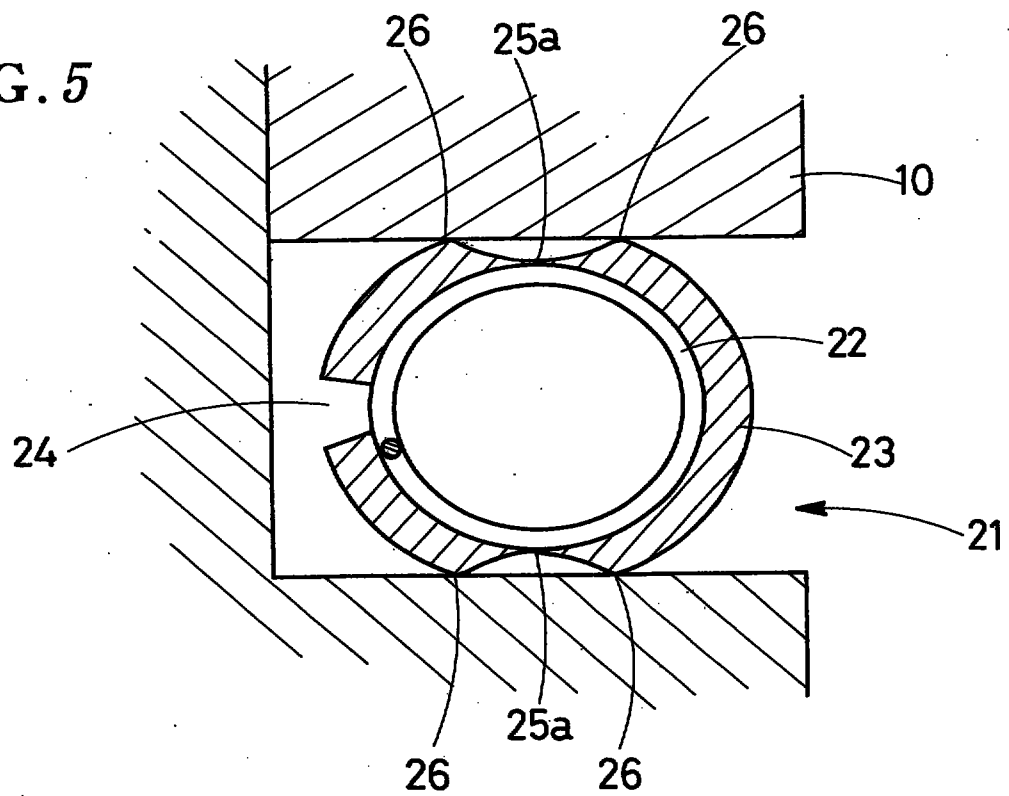

This Sheet Has Been Replaced



FIG. 6

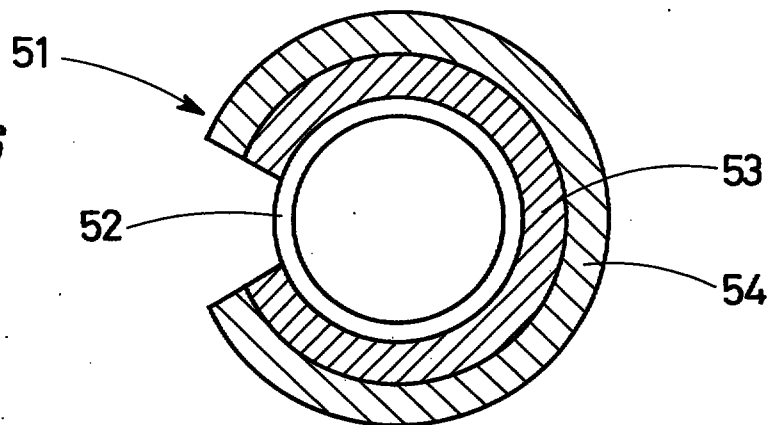


FIG. 7


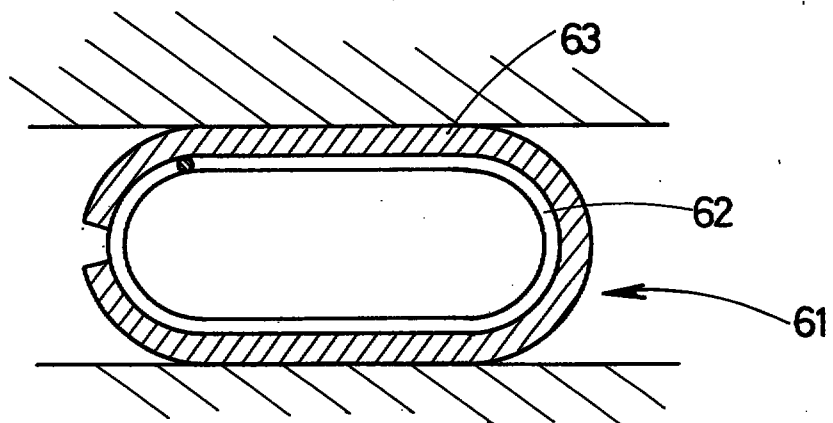



FIG. 8

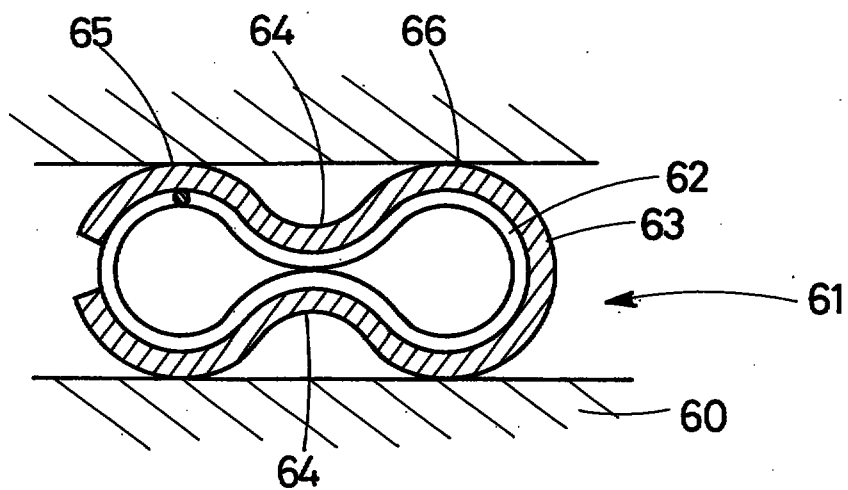

This Sheet Has Been Replaced



FIG. 9

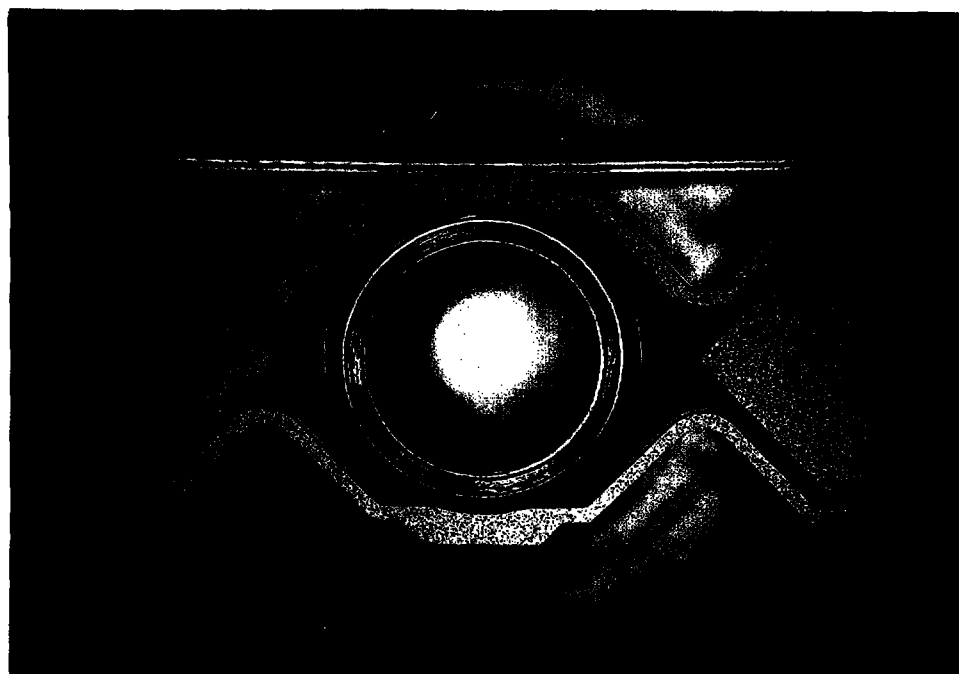

This Sheet Has Been Replaced



- ABSTRACT

METAL GASKET

A metal gasket excellent in sealing performance and
5 capable of sealing with a small pressing force. The metal
gasket comprises at least one metal sheath with C-shaped
cross-section and a ring elastic core surrounded by the metal
sheath and the metal gasket is served for sealing with aid of
the contact with the sealing face tightened by exerting a
10 force in the axis center direction, wherein the metal sheath
has the worked portion with a locally thin cross-section over
the whole length, and when the metal sheath is exerted with a
force and deformed, the deflection in the axis direction of
the metal sheath due to concentrated stress on the thin worked
15 portion causes to form projections at the both sides of the
deflection which projections are pressed onto the sealing
face.

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

13 FEB 1997

This Sheet Has Been Replaced



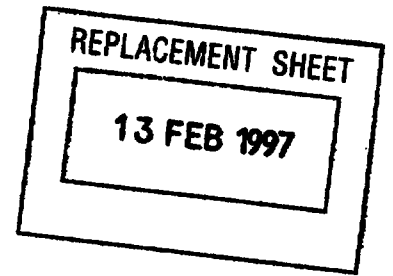


FIG. 1

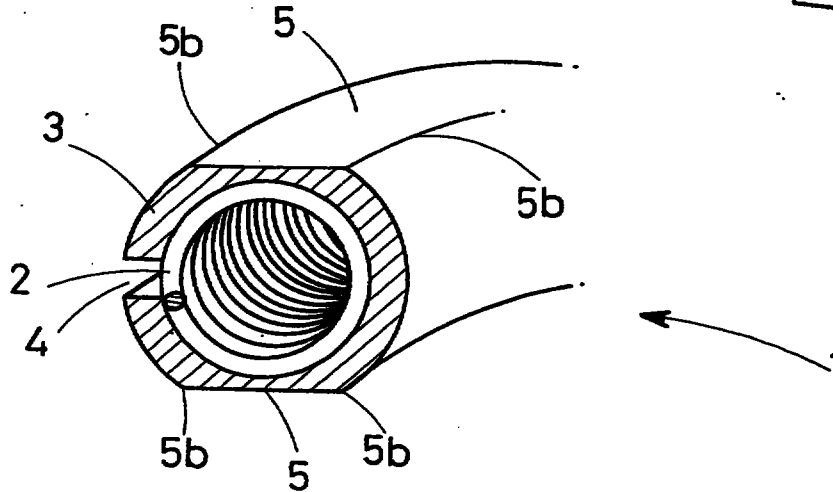
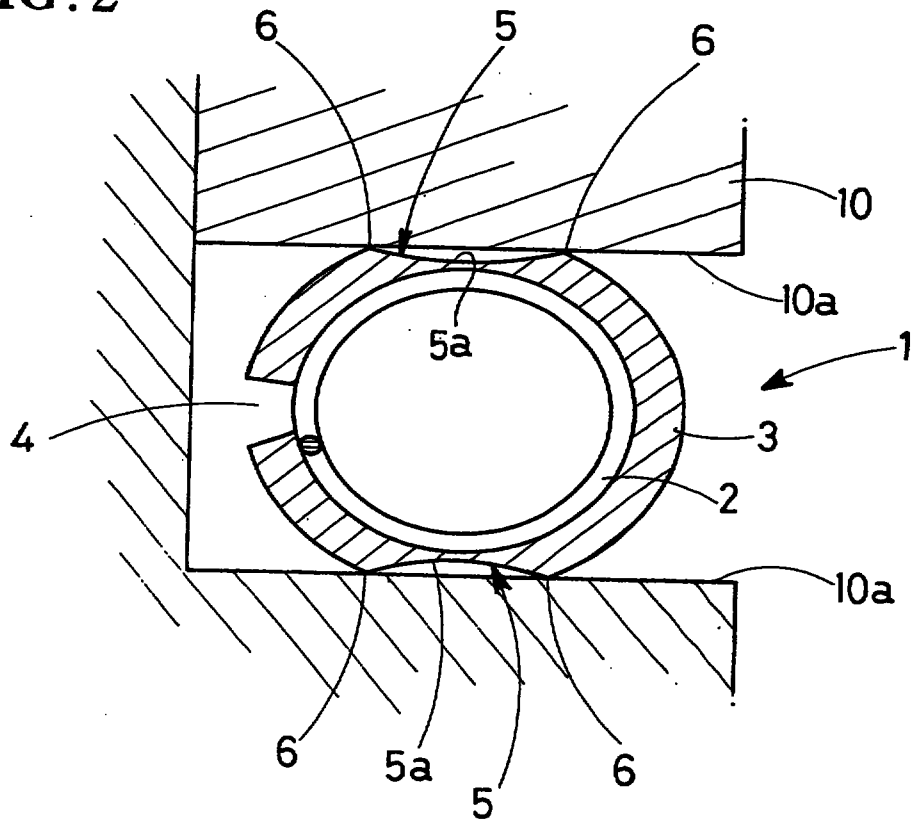


FIG. 2



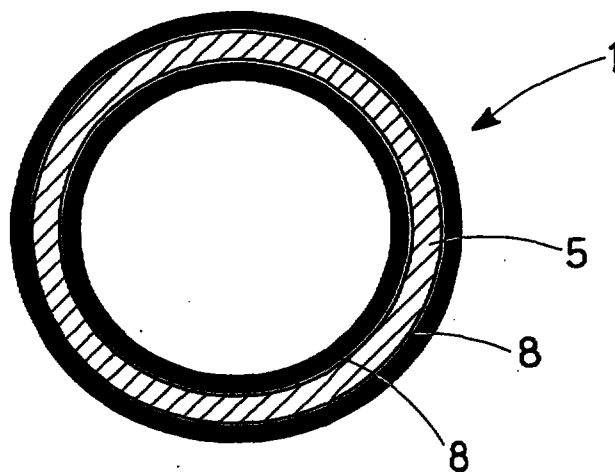
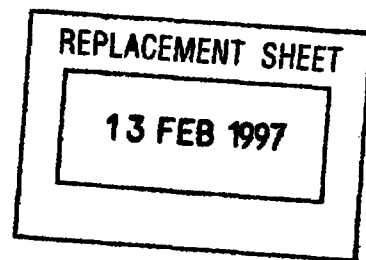


FIG. 3

13 FEB 1997

FIG. 4


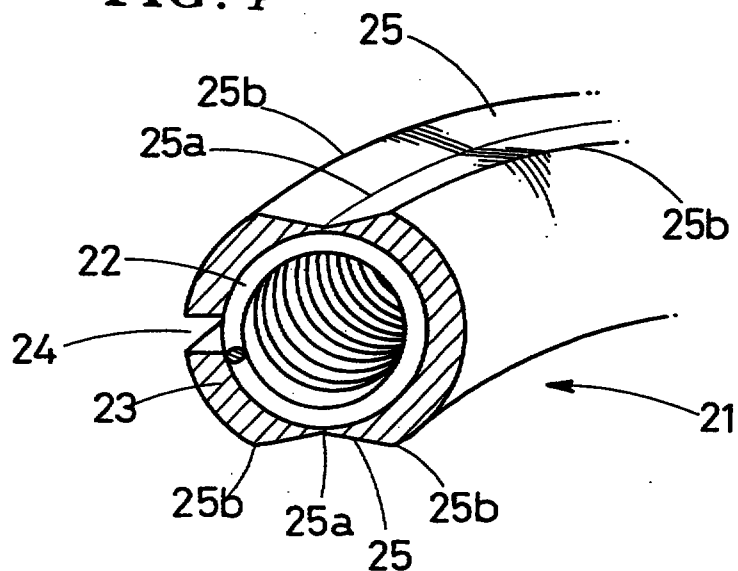


FIG. 5

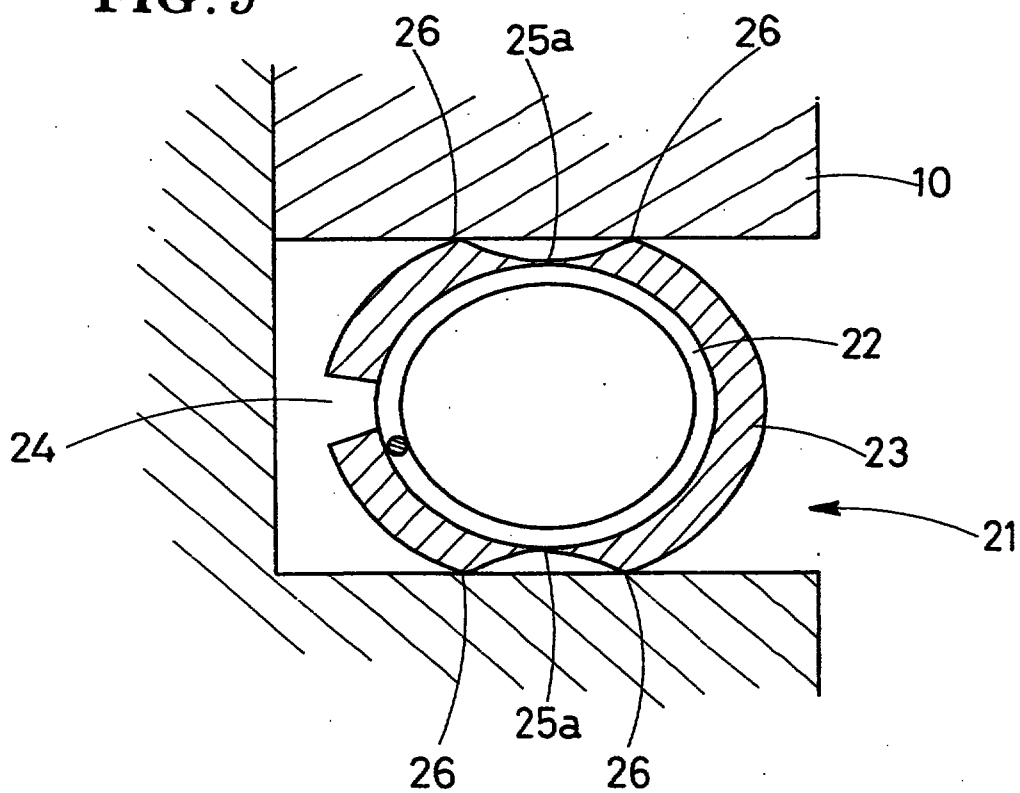

13 FEB 1997

FIG. 6

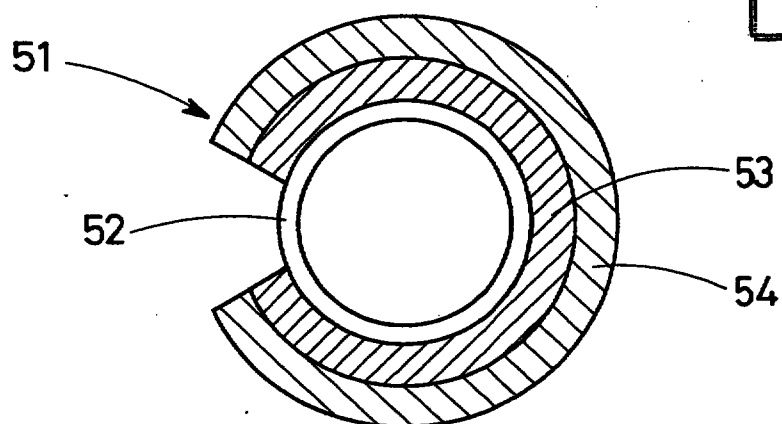


FIG. 7



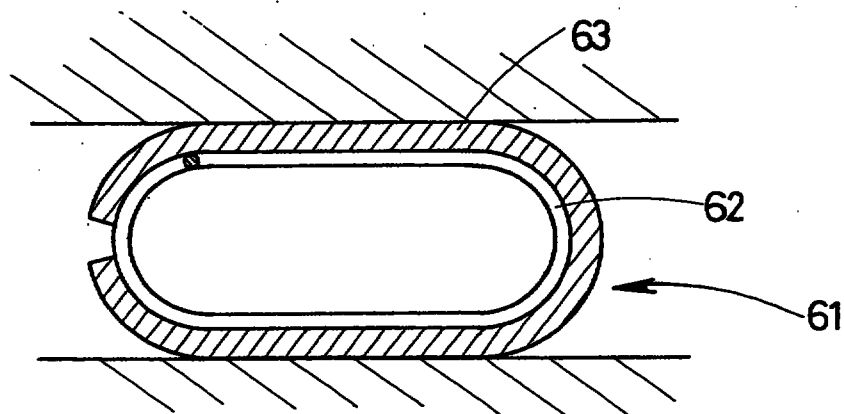


FIG. 8

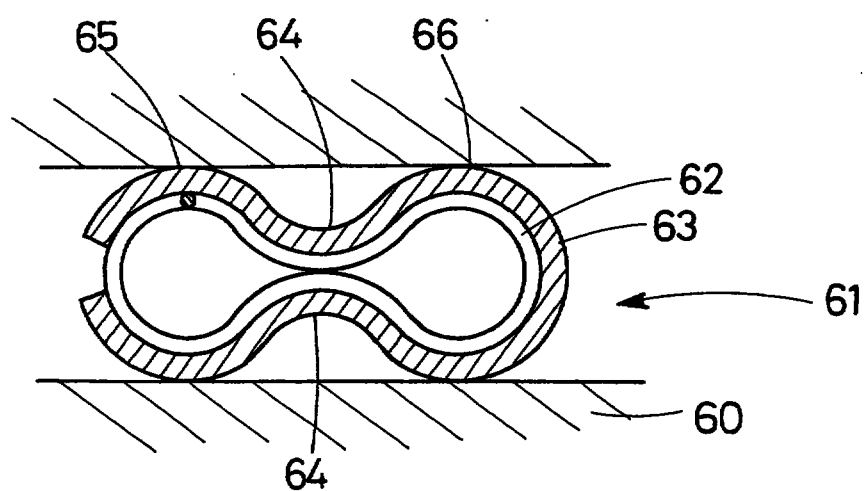


13 FEB 1997

FIG. 9

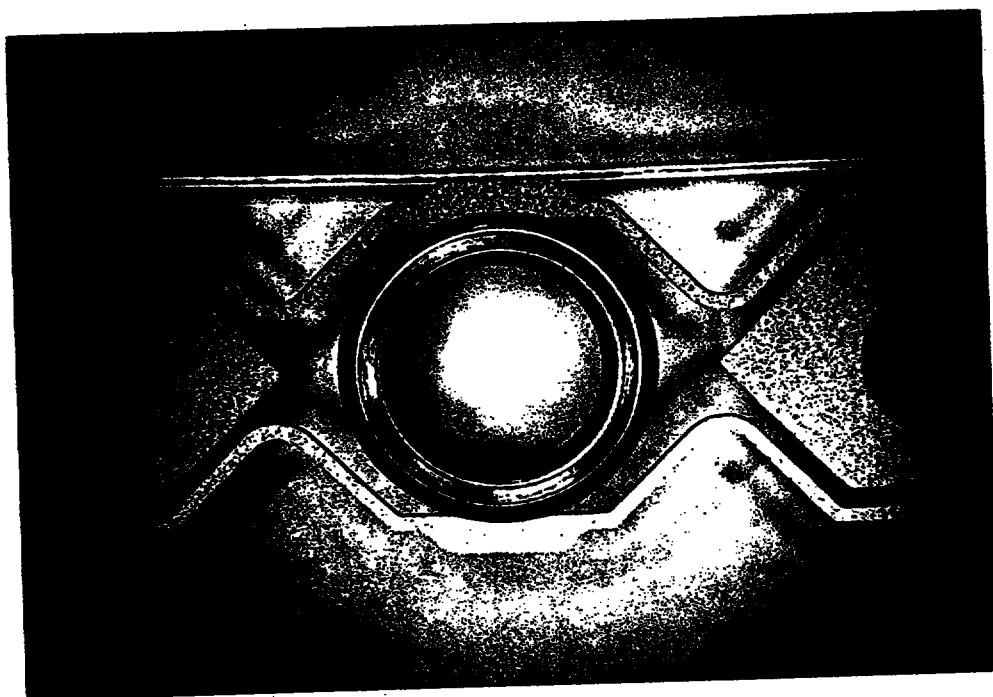

ABSTRACT
METAL GASKET

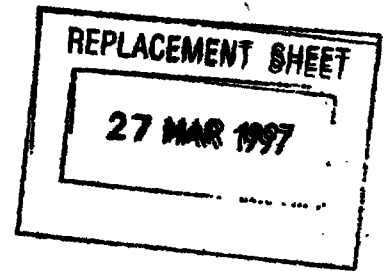

5 A metal gasket excellent in sealing performance and
capable of sealing with a small pressing force. The metal
gasket comprises at least one metal sheath with C-shaped
cross-section and a ring elastic core surrounded by the metal
sheath and the metal gasket is served for sealing with aid of
the contact with the sealing face tightened by exerting a
10 force in the axis center direction, wherein the metal sheath
has the worked portion with a locally thin cross-section over
the whole length, and when the metal sheath is exerted with a
force and deformed, the deflection in the axis direction of
the metal sheath due to concentrated stress on the thin worked
15 portion causes to form projections at the both sides of the
deflection which projections are pressed onto the sealing
face.

Figure 2 to accompany publication.

0-0241139

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

03 DEC 1997

0611451-0

WHAT IS CLAIMED IS:

1. A metal gasket comprising at least one metal sheath with a C-shaped cross-section ~~and a ring elastic core surrounded by~~
5 ~~said metal sheath~~ for preventing leakage of fluid with aid of contact with the sealing face tightened by being exerted with a force in the axis center direction,

wherein said metal sheath has a thin walled portion formed thin locally on the periphery of said metal sheath, and

10 when a force is exerted to said metal sheath to deform, the deflection in the axis center direction caused by the stress concentration on said thin walled portion causes to from projections at the both sides of the deflection which projections are pressed onto said sealing face to prevent
15 leakage of fluid.

2. The metal gasket as claimed in claim 1, wherein said thin walled portion is formed on both sides of said metal gasket.

20 3. The metal gasket as claimed in claim 1, wherein said thin walled portion of said metal sheath is a flat face.

4. The metal gasket as claimed in claim 2, wherein said thin walled portion of said metal sheath is a flat face.

25 5. The metal gasket as claimed in claim 1, wherein said worked portion of said metal sheath has a U-shaped, V-shaped,



REPLACEMENT SHEET

03 DEC 1997

or]-shaped cross-section.

6. The metal gasket as claimed in claim 2, wherein said
worked portion of said metal sheath has a U-shaped, V-shaped,
or]-shaped cross-section.

5

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-15-



* C L M S *

REPLACEMENT SHEET

23 SEP 1998

WHAT IS CLAIMED IS :

1. A metal gasket comprising at least one metal sheath with a C-shaped cross-section and a ring elastic core surrounded by said metal sheath , said gasket functioning to prevent leakage of fluid during contact with a sealing face and when subjected to a force in the axis center direction, wherein said metal sheath has a thin walled portion formed at a location on the periphery of said metal sheath which is to be contacted by the sealing face , said thin-walled portion of said metal sheath being thinner at the center thereof , and when a force is exerted upon said metal gasket to deform the sheath a deflection occurs in the axis center direction as a result of the stress concentration on said thin walled portion which causes projections to be formed at both sides of the deflection , which projections are pressed onto said sealing face to prevent leakage of fluid.
2. The metal gasket as claimed in claim 1 , wherein said thin walled portion is formed on diametrically opposed locations on the periphery of said metal sheath.
3. The metal gasket as claimed in claim 1, wherein said thin walled portion of said metal sheath is a flat surface.
4. The metal gasket as claimed in claim 2, wherein each said thin walled portion of said metal sheath is a flat surface.



23 SEP 1998

5. The metal gasket as claimed in claim 1 , wherein the cross section of said thin walled portion of said metal sheath is V-shaped.
6. The metal gasket as claimed in claim 2 , wherein the cross section of said thin walled portion of said metal sheath is V-shaped.
7. The metal gasket as claimed in claim 2 , said gasket having a generally toroidal shape.
8. An annular metal gasket comprising at least one metal sheath and designated for providing sealed contact with an opposing surface under an exerted force, said metal sheath having a periphery and a thin-walled surface with first edges formed on the periphery, said thin-walled surface of said metal sheath being thinner at the center thereof, and in response to a force exerted upon said gasket causing the sheath to deform and the thin-walled surface to deflect inwardly, the gasket further comprising first projections formed at the first edges which projections press into the opposing surface to prevent leakage of fluid.
9. The metal gasket as claimed in claim 8 , further comprising a second thin-walled surface with second edges, said thin-walled surface formed on the periphery at a position removed from the first thin-walled surface, and second projections formed at the second edges upon deformation of said sheath , both said first



23 SEP 1998

and second projections forming double sealing lines , said gasket designed for providing sealed contact with two surfaces that oppose, respectively, the two thin-walled surfaces.

10. The metal gasket as claimed in claim 9 , wherein said thin-walled surfaces of said metal sheath is a flat surface.
11. The metal gasket as claimed in Claim 8, wherein said thin-walled surfaces of said metal sheath are flat surfaces.
12. The metal gasket as claimed in claim 8, wherein the cross section of said thin-walled surface of said metal sheath is V-shaped.
13. The metal gasket as claimed in claim 9, wherein the cross-section of said thin-walled surfaces of said metal sheath is V-shaped.
14. The metal gasket as claimed in claim 8, further comprising a metal coil spring within the metal sheath.

