

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2023 年 4 月 6 日 (06.04.2023)



(10) 国际公布号
WO 2023/050202 A1

(51) 国际专利分类号:
H04W 24/02 (2009.01)

(21) 国际申请号: PCT/CN2021/121863

(22) 国际申请日: 2021 年 9 月 29 日 (29.09.2021)

(25) 申请语言: 中文

(26) 公布语言: 中文

(71) 申请人: 北京小米移动软件有限公司 (BEIJING XIAOMI MOBILE SOFTWARE CO., LTD.) [CN/CN]; 中国北京市海淀区西二旗中路33号院6号楼8层018号, Beijing 100085 (CN)。

(72) 发明人: 陶旭华 (TAO, Xuhua); 中国北京市海淀区西二旗中路33号院6号楼8层018号, Beijing 100085 (CN)。

(74) 代理人: 北京名华博信知识产权代理有限公司 (BOXIN CHINA INTELLECTUAL PROPERTY); 中国北京市海淀区黑泉路8号1幢4层101-10号, Beijing 100192 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ,

(54) **Title:** METHOD AND APPARATUS FOR RECEIVING MEASUREMENT GAP CONFIGURATION INFORMATION, METHOD AND APPARATUS FOR SENDING MEASUREMENT GAP CONFIGURATION INFORMATION, AND MEDIUM

(54) 发明名称: 一种接收和发送测量间隙配置信息的方法、装置及介质

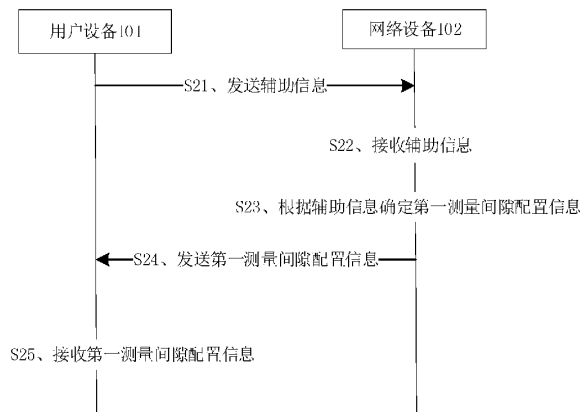


图 2

- 101 User equipment
- 102 Network device
- S21 Send auxiliary information
- S22 Receive the auxiliary information
- S23 Determine first measurement gap configuration information according to the auxiliary information
- S24 Send the first measurement gap configuration information
- S25 Receive the first measurement gap configuration information

(57) **Abstract:** Provided in the present disclosure are a method and apparatus for receiving measurement gap configuration information, a method and apparatus for sending measurement gap configuration information, and a medium. The method for receiving measurement gap configuration information comprises: sending auxiliary information to a network device of a service network, wherein the auxiliary information is used for indicating at least one parameter which is switched by a user equipment from the service network to a target network; and receiving first measurement gap configuration information that is determined by the network device according to the auxiliary information. In the present disclosure, a user equipment (101) reports related parameters which are switched from a service network to a target network; and a network device (102) determines first measurement gap configuration information according to the related parameters switched from the service network. The network device can indicate, according to the first measurement gap configuration information, the time for the user equipment (101) to switch from the service network to the target network to determine the related parameters, such that the user equipment (101) may respectively determine the related parameters and perform service

[见续页]

WO 2023/050202 A1

NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布：

— 包括国际检索报告(条约第21条(3))。

transmission of the service network at different times, thereby ameliorating the problem of service interruption during the process of service network switching.

(57) 摘要：本公开提供了一种接收和发送测量间隙配置信息的方法、装置及介质，其中，方法包括：向服务网络的网络设备发送辅助信息；其中，所述辅助信息用于指示所述用户设备从所述服务网络向目标网络切换的至少一参数；接收所述网络设备根据所述辅助信息确定的第一测量间隙配置信息。本公开中，用户设备（101）上报从服务网络向目标网络切换的相关参数，网络设备（102）根据服务网络切换的相关参数，确定第一测量间隙配置信息。网络设备根据第一测量间隙配置信息，能够指示用户设备（101）从服务网络切换至目标网络进行相关参数测定的时机，从而用户设备（101）可以在不同的时机分别进行相关参数测定以及服务网络的业务传输，改善服务网络切换过程中的业务中断问题。