



(51) International Patent Classification:
F16L 9/147 (2006.01)

(21) International Application Number:
PCT/FI2012/050049

(22) International Filing Date:
20 January 2012 (20.01.2012)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20115062 24 January 2011 (24.01.2011) FI

(71) Applicant (for all designated States except US): **MARI-
CAP OY** [FI/FI]; Pohjantähdentie 17, FI-01450 Vantaa
(FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SUNDHOLM, Göran**
[FI/FI]; Ilmari Kiannon kuja 3, FI-04310 Tuusula (FI).

(74) Agent: **HEINÄNEN OY**; Äyritie 8 D, FI-01510 Vantaa
(FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: A CONVEYING PIPE PART OF A PNEUMATIC MATERIAL CONVEYING SYSTEM AND A METHOD FOR FORMING A PIPE JOINT

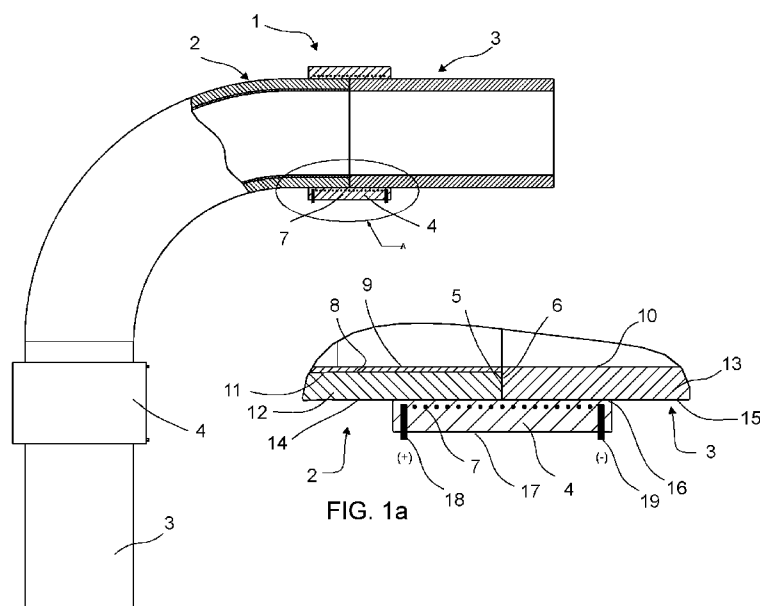


FIG. 1a

(57) Abstract: A conveying pipe part (2) of a pneumatic material conveying system, more particularly of a conveying system for wastes, which conveying pipe part comprises a wall, which is formed from at least two layers, at least the first one of which is a plastic material layer (12) and extends to the outer surface of the pipe part (2). The plastic material layer (12) is of plastic material or of plastic composite material, and that the wall of the pipe part (2) comprises a second layer, a reinforcement part (8), which reinforcement part is preferably a tubular part, and arranged in the wall of the pipe part (2) at a distance inwards from the outer surface.

FIG. 1