

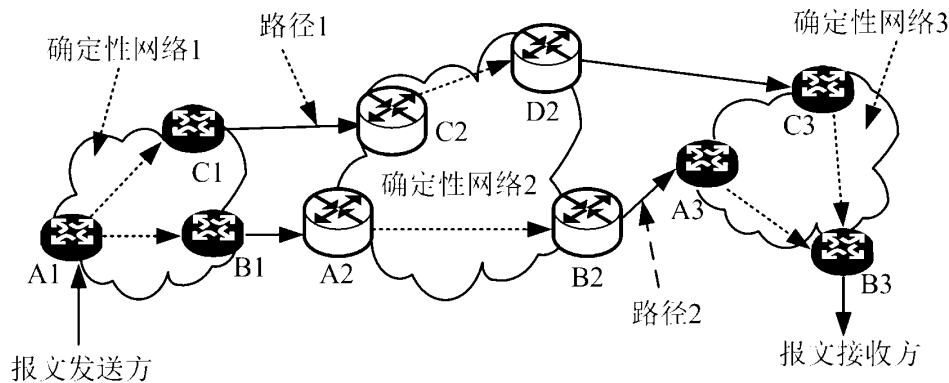


图 1

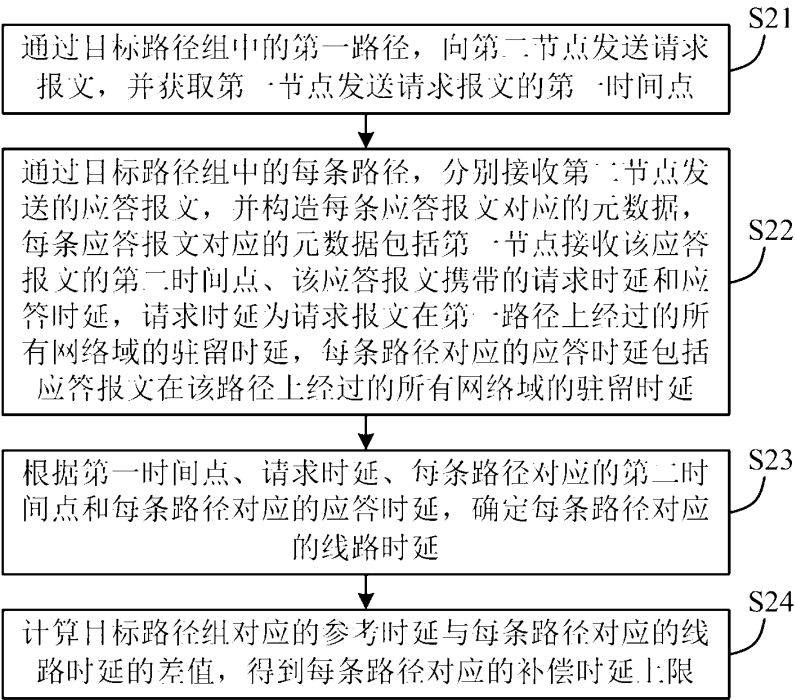


图 2



图 3

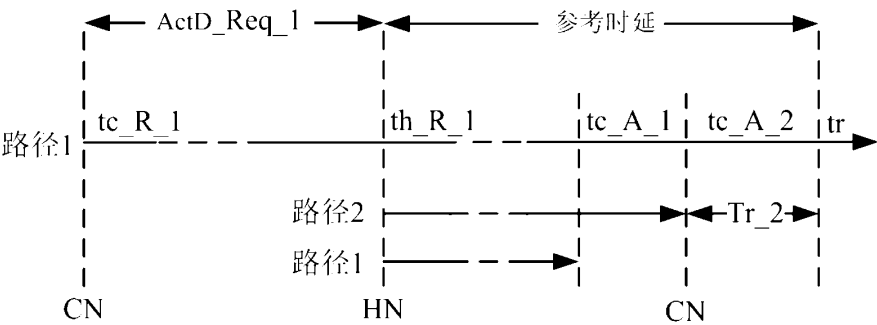


图 4

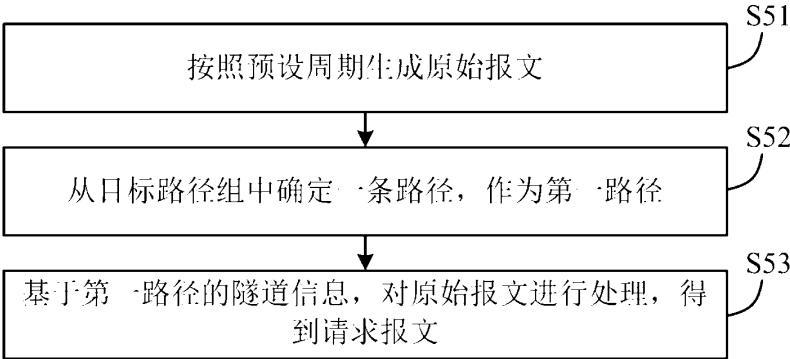


图 5

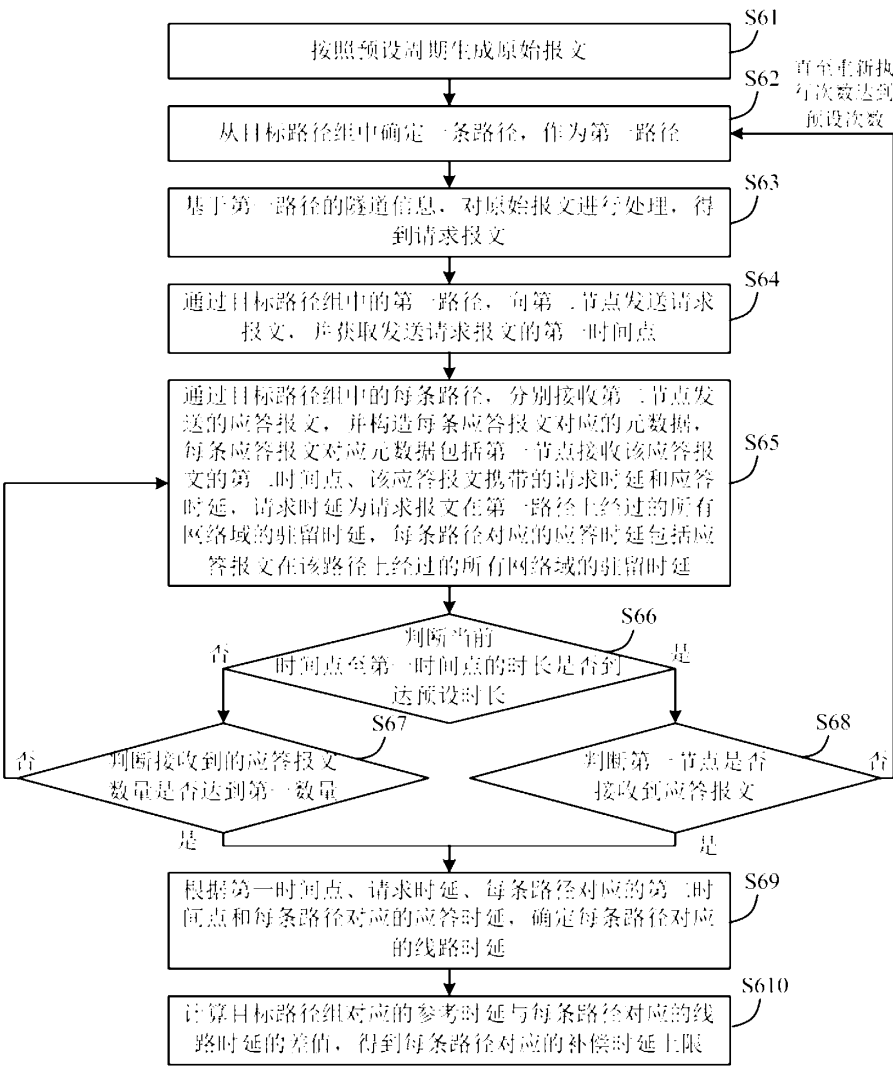


图 6

第一表

组标识	路径数量	对端地址	预设调整时延	参考时延	预设周期	预设时长	第一指针
1	4	20.20.20.20	2	40	1	200	0xffc00080
2	2	...	...	x	...	x	x
3	2	...	...	x	...	x	x
...	...	...	...	...	...	...	...

第二表

路径标识	接收接口标识	隧道标识	补偿时延上限
1	0	1	x
2	1	5	x
3	2	8	x
4	3	10	x

图 7

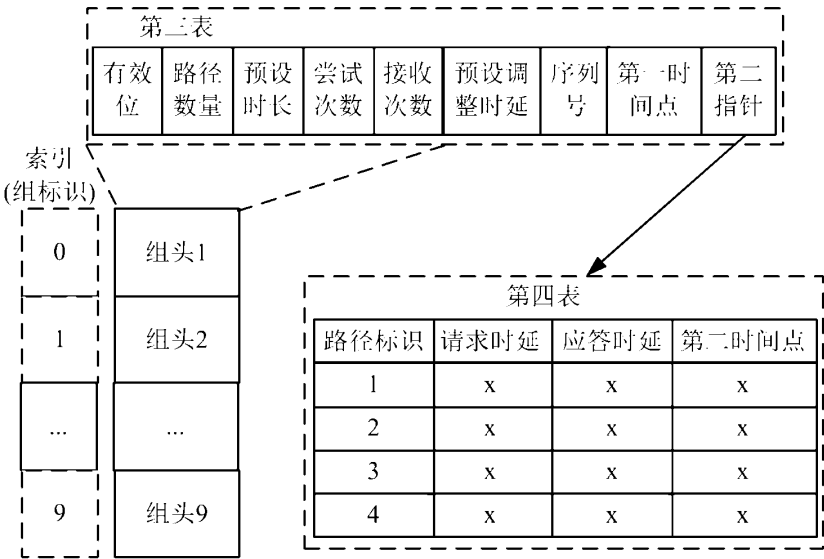


图 8

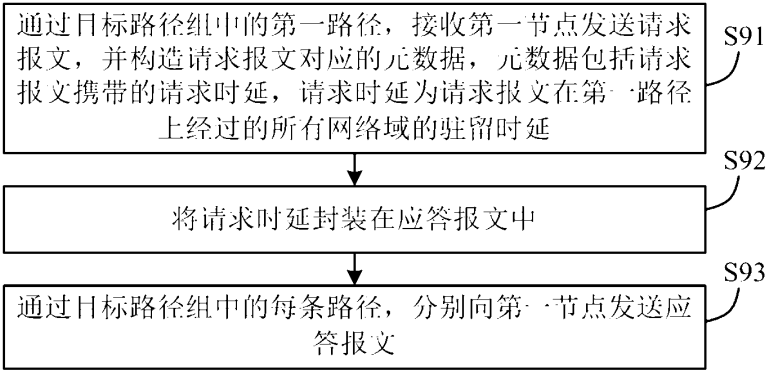


图 9

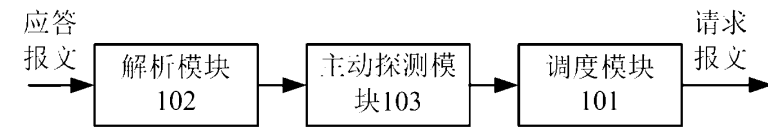


图 10

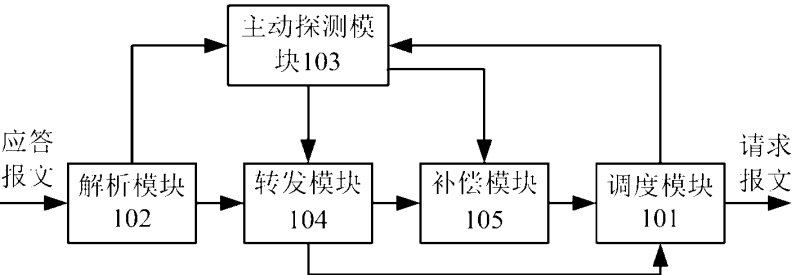


图 11

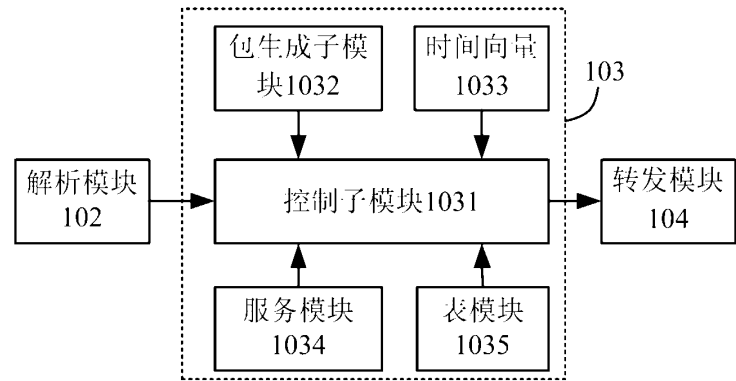


图 12

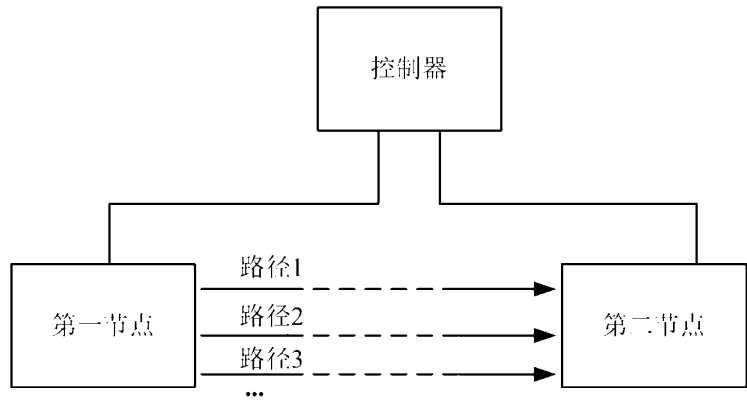


图 13

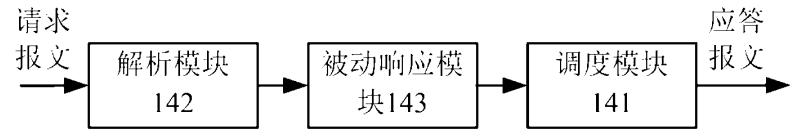


图 14

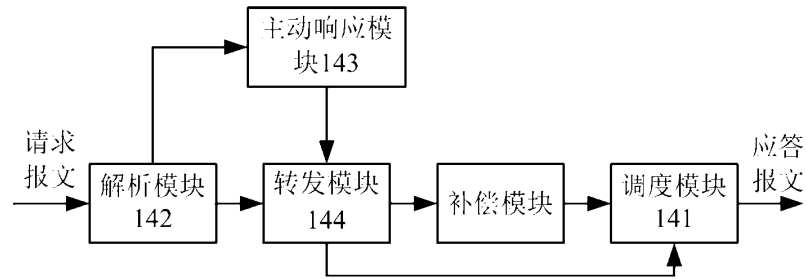


图 15

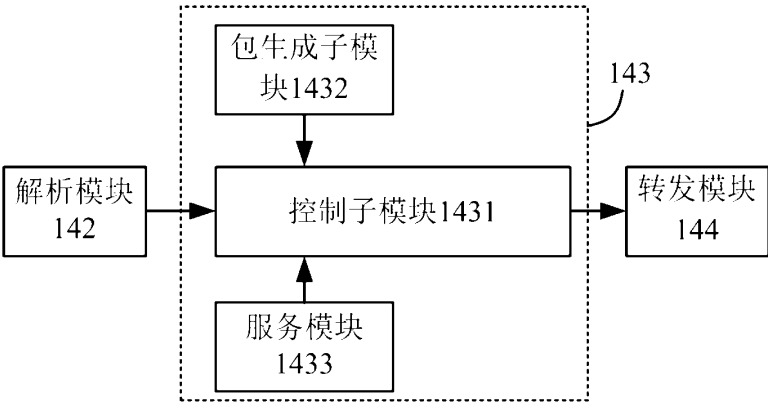


图 16

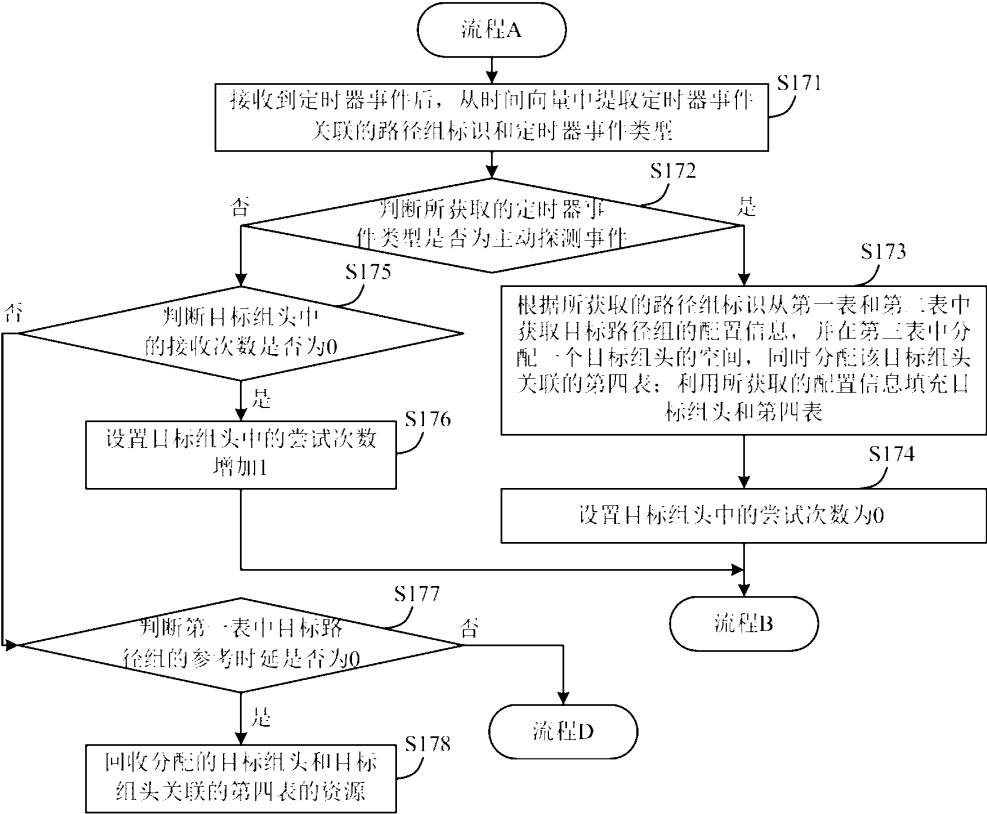


图 17

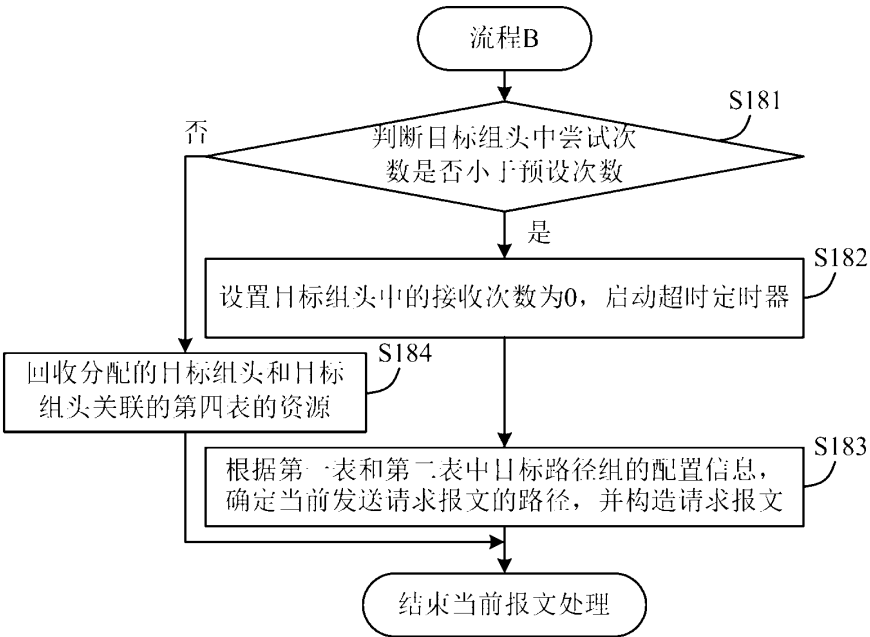


图 18

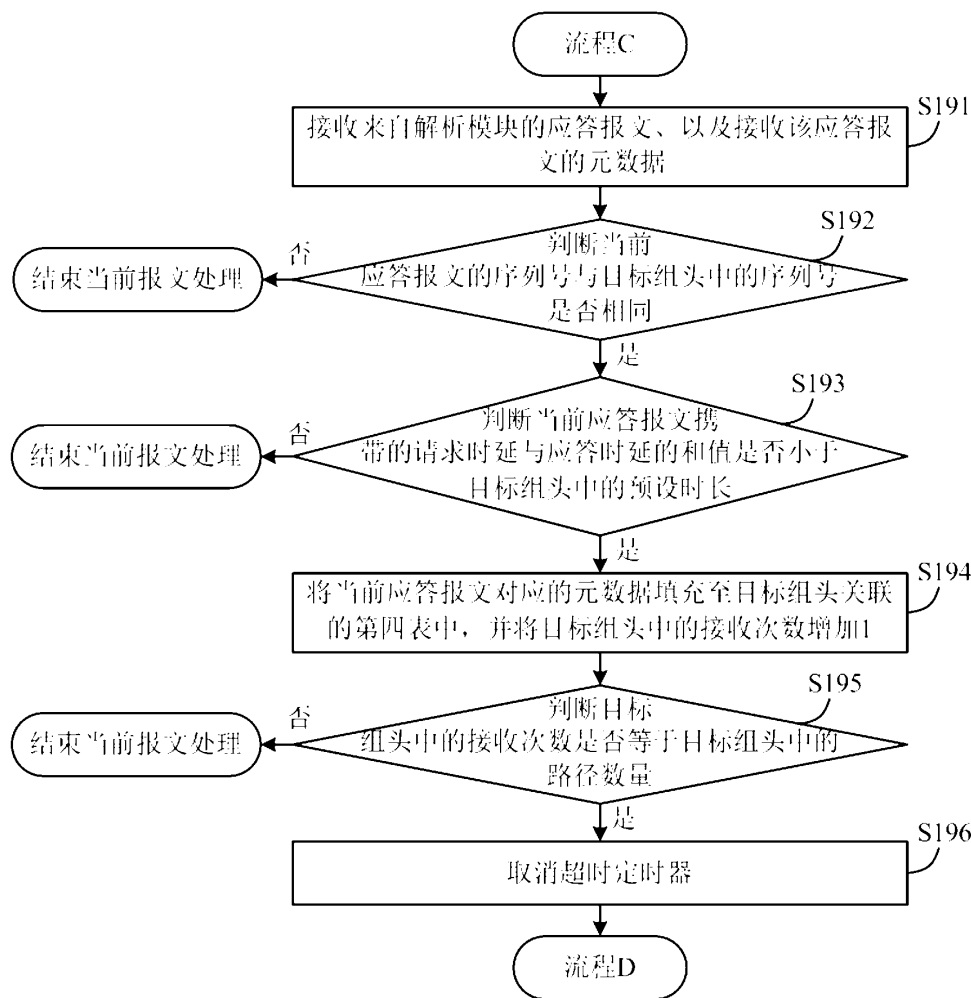


图 19

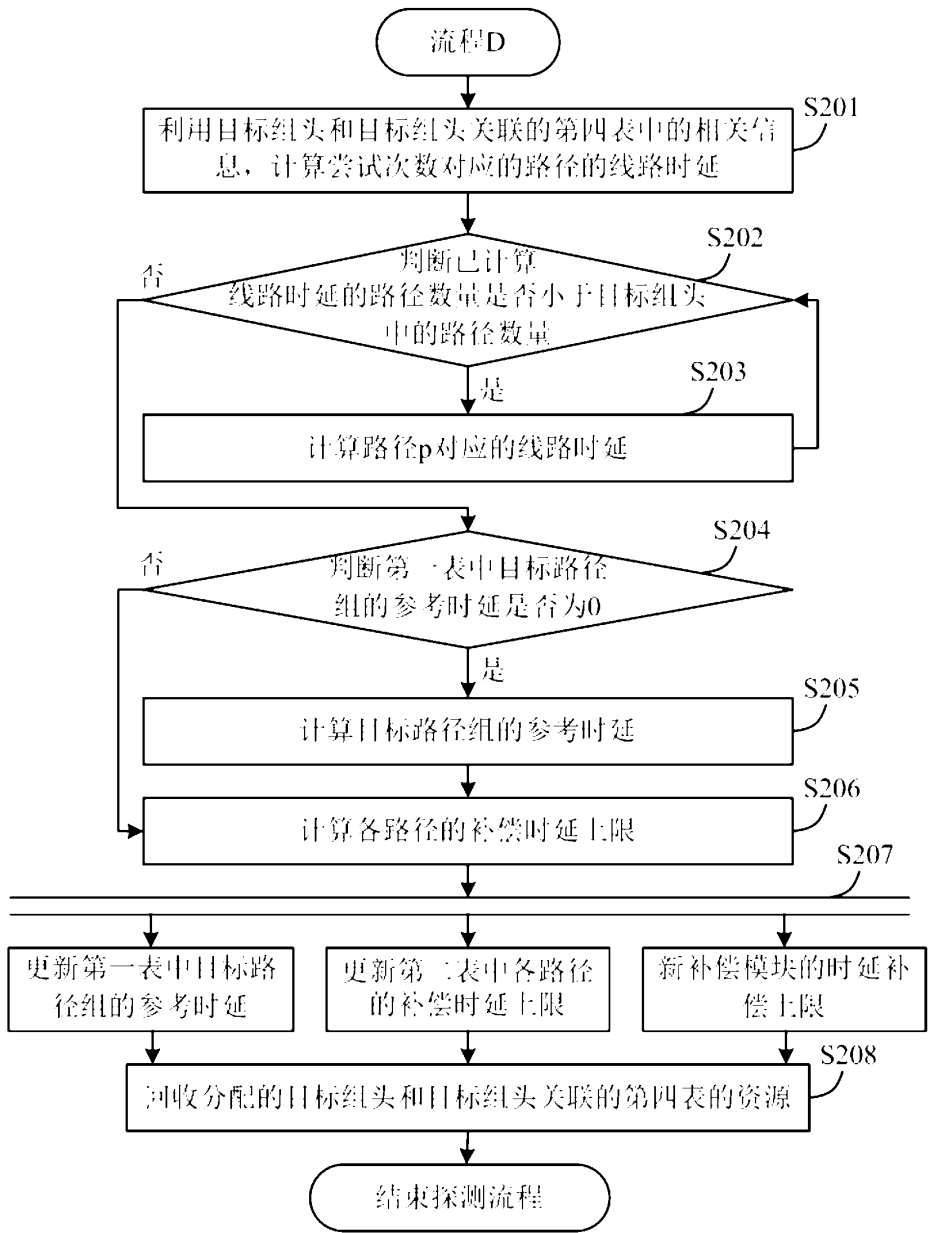


图 20