14/04/03

20030212 35

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
6 June 2002 (06.06.2002)

PCT

(10) International Publication Number
WO 02/44521 A1

(51) International Patent Classification[7]: E21B 41/00, 33/03, 33/035, 33/04

(21) International Application Number: PCT/US01/43771

(22) International Filing Date:
14 November 2001 (14.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/726,006 29 November 2000 (29.11.2000) US

(71) Applicant: COOPER CAMERON CORPORATION [US/US]; Suite 1200, 515 Post Oak Boulevard, Houston, TX 77027 (US).

(72) Inventor: ALLEN, Timothy, J.; Route 2, Box 224A, Hempstead, TX 77445 (US).


(74) Agent: HARTMANN, Michael, P.; Cooper Cameron Corp., Manager Patent Services, P.O. Box 1212, Houston, TX 77251-1212 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: WELLHEAD ASSEMBLY FOR INJECTIONG A FLUID

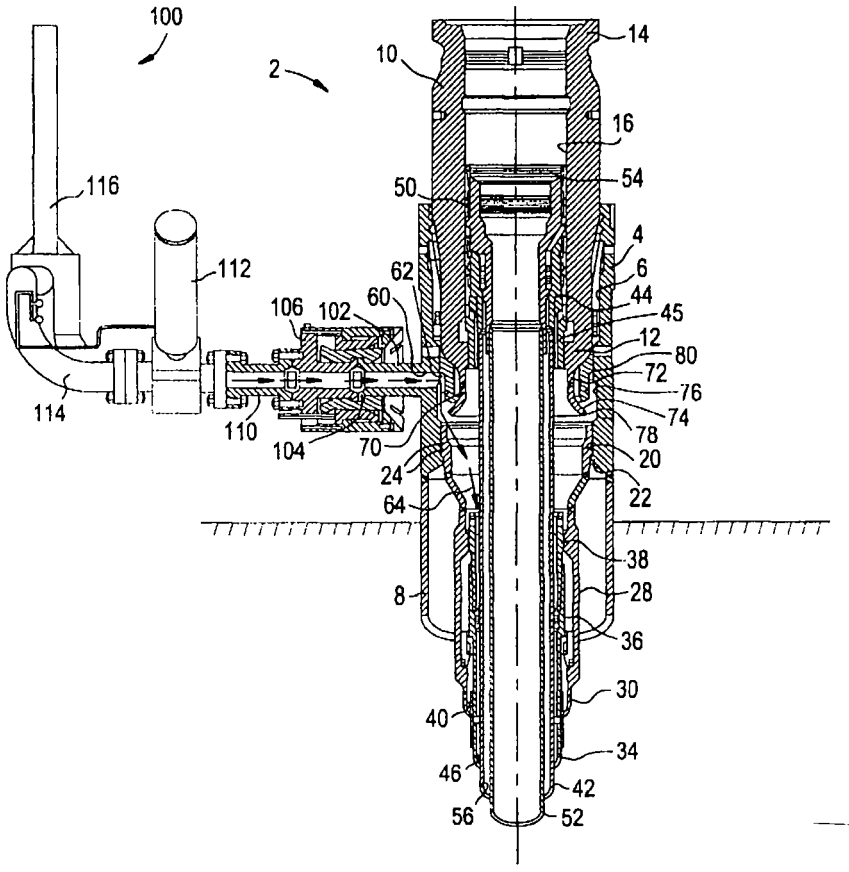

(57) Abstract: A wellhead (2) comprises an outer housing (4) and an inner housing (14) each having a central bore. The inner housing (14) has a first end within the outer housing (4). A first inner is secured at a first end in the outer housing. A port (60) is provided through the outer housing (4) in communication with the central bore therethrough, the port opening into the central bore of the outer housing (4) between the first end of the inner housing (14) and the first end of the first inner casing (20). A second inner casing (42) is secured in the wellhead (2) at a first end, whereby the port opens into the central bore of the outer housing (4) between the first end of the first inner housing and the first end of the second inner housing. An annulus (46) is formed between the first and second inner casings. The wellhead is particularly suitable for the injection of a slurry of drilling cuttings without a guide base.

WO 02/44521 A1

ACTION

IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.