



(43) International Publication Date
16 January 2014 (16.01.2014)

- (51) International Patent Classification:
B60K 1/00 (2006.01) *H01M 10/44* (2006.01)
- (21) International Application Number:
PCT/IL2013/050583
- (22) International Filing Date:
9 July 2013 (09.07.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/669,160 9 July 2012 (09.07.2012) US
- (71) Applicant: PHINERGY LTD. [IL/IL]; 2 Yodfat St., P.O. Box 1290, 7129106 Lod (IL).
- (72) Inventor: YADGAR, Avraham; 16 Hazamir Street, 550716 Kiryat Ono (IL).
- (74) Agent: PEARL COHEN ZEDEK LATZER BARATZ; P.O. Box 12704, 4673339 Herzlia (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: SYSTEM AND METHOD FOR CONTROLLING OPERATION OF A METAL-AIR BATTERY

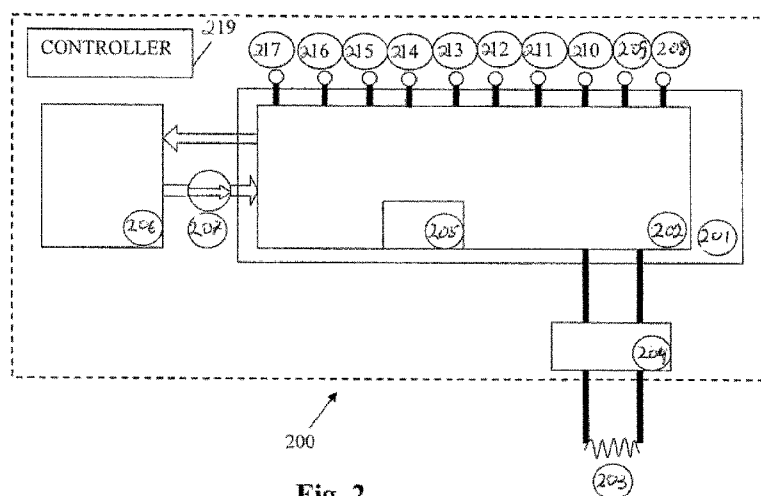


Fig. 2

(57) Abstract: A system and method for controlling operation a metal-air battery are provided. A system and method for controlling operation a metal-air battery may include controlling a current drawn from the battery; and controlling a temperature of the battery. A system and method may draw a preconfigured amount of power from a metal-air battery, and draw power from a rechargeable device when power required is greater than the preconfigured power.