9700028-5 IPOS

REPLACED SHEETS SG
☑ Description : paged ...7... to paged ...9...
☑ Claim(s) : paged ...18... to paged ...21...
☐ Drawing(s) : paged ..... to paged .....
☑ Abstract : paged ..... to paged .....
DATE OF RECEIPT ...25-9-99...

SHALLOW ETCH AIR BEARING SURFACE FEATURES FOR OPTIMIZED TRANSDUCER SPACING

BACKGROUND OF THE INVENTION

1. Field of the Invention.

This invention relates in general to air bearing sliders for use with recording media and more particularly, to a slider having air bearing surface features which minimize the difference between the minimum mechanical slider/disk spacing and the magnetic head/disk spacing.

2. Description of Related Art.

Conventional magnetic disk drives are information storage devices which utilize at least one rotatable magnetic media disk with concentric data tracks, a read/write transducer for reading and writing data on the various tracks, an air bearing slider for holding the transducer adjacent to the track generally in a flying mode above the media, a suspension for resiliently holding the air bearing slider and the transducer over the data tracks, and a positioning actuator connected to the suspension for moving the transducer across the media to the desired data track and maintaining the transducer over the data track during a read or a write operation.

In magnetic recording technology, it is continually desired to improve the areal density at which information can be recorded and reliably read. Because the recording

density of a magnetic disk drive is limited by the distance between the transducer and the magnetic media, a goal of air bearing slider design is to "fly" an air bearing slider as closely as possible to a magnetic medium while avoiding physical impact with the medium. Smaller spacings, or "fly heights", are desired so that the transducer can distinguish between the magnetic fields emanating from closely spaced regions on the disk.

Zone bit recording can provide significant performance and capacity improvements in magnetic disk storage files. In order to facilitate this technology, it is desirable to maintain a constant spacing between the read/write head and the disk across all the zones, from the inner-diameter (ID) to the outer-diameter (OD) of the disk. It is also desirable to fly as low as possible across the data zones to increase amplitude and resolution and further increase areal density and file capacity. However, low fly height causes concerns over mechanical reliability in the file, for both start/stop life and long term flyability.

Constant flying heights across the data zones presents a substantial challenge to slider design because the air velocity created by the rotating disk varies in both magnitude and direction relative to the air bearing slider at all radii in rotary actuator files.

An air bearing slider also experiences fly height variations due to roll. For an air bearing slider with zero skew relative to disk rotation, roll is a measure of the angle of rotation about the longitudinal axis of the air bearing slider. Variations in roll occur when a resiliently mounted slider experiences a skewed air flow or the actuator experiences an impact with the disk. Insensitivity to roll variations is a crucial requirement of air bearing sliders.

Finally, an air bearing slider experiences varying conditions during the high speed radial movement of the actuator as it accesses data on various portions of the disk. High speed movement across the disk can lead to large values of slider roll, pitch and skew and a resultant variation in fly height. This is yet another reason that an air bearing slider must be insensitive to changes in roll, pitch and skew.

Typical taper-flat type sliders cannot satisfy the constant spacing requirements for zone-bit recording. For most rotary actuator configurations, the taper-flat slider flying height increases rapidly as the head is moved out from the ID. As it approaches the middle of the data band, it reaches a maximum spacing, which may be up to twice as large as the initial ID flying height. From there, the

clearance drops as the air bearing slider moves toward the outer rim of the disk.

When any of the above described variations in fly height occur, they may result in contact between the air bearing slider and the rapidly rotating recording medium. Any such contact leads to wear of the air bearing slider and the recording surface and is potentially catastrophic..

Prior art slider designs have attempted to avoid this problem by addressing one or more of above described sensitivities, so as to produce an air bearing slider with uniform flying height under the varying conditions that may be experienced by the air bearing slider. Alternative designs for the air bearing surfaces have been developed to provide the required aerodynamic performance. Further, these designs frequently utilize trade-offs between the slider's pitch and roll to achieve the flat head/disk spacing desired. However, the rail width which provides the air bearing surface must also be capable of accommodating the read/write transducer. Consequently, variations in the slider's flying attitude can result in a much lower mechanical slider/disk spacing with a corresponding increase to the magnetic head/disk spacing.

For example, Fig. 1a illustrates a prior art slider 10 having a leading edge 12, a trailing edge 14 and two side

edges 16, 18. As the disk begins to rotate, the slider pitches such that the leading edge 12 is raised with respect to the trailing edge 14 as shown in Fig. 1a. The slider illustrated in Fig. 1a includes two side rails 20, 22 and a center rail 24 for a given performance standard. The two side rails 20, 22 and the center rail 24 are disposed on a support structure 26. A transducer 28 is disposed on the center rail 24 at the trailing edge 14 for performing read/write operations on the disk. Fig. 1b illustrates a close-up view of the center rail 24 at the trailing edge 14 of the slider 10. The head gap 32 of the transducer 28 is also shown. Under the above described conditions, the slider may experience roll, indicated by longitudinal displacement angle 34, which may cause the slider to contact the rotating disk due to the much lower mechanical slider/disk spacing. Fig. 2 illustrates how a nominal roll angle 34 causes the mechanical spacing of the center rail edge 42 to be substantially lower than the magnetic gap flying height.

Fig. 2. illustrates a rear view of the prior art slider 10 along lines A-A of Fig. 1a. The view in Fig. 2 is exaggerated for clarity. In Fig. 2, the center rail 24 is shown disposed on the support structure 26. As the slider 10 experiences a nominal roll angle 34, the mechanical

spacing 40 between the edge 42 of the center rail 24 and the disk 44 decreases while the magnetic spacing 46 between the head gap 48 and the disk 44 decreases to a lesser degree, remains the same or becomes greater depending upon whether the axis of the roll is displaced from the slider's central longitudinal axis. Fig. 2 illustrates the situation where the magnetic spacing 46 between the head gap 48 and the disk 44 becomes greater. The magnitude of the difference between the mechanical spacing 40 and the magnetic gap flying height 48 can be substantial. For example, a slider with a 400 μm trailing edge rail width and a nominal 50 μrad flying roll attitude will have a minimum mechanical spacing 40 that is ten nanometers (nm) lower than the desired magnetic spacing 46 fly height causing the slider to be raised for increased wear resistance, i.e., increased life-time.

It can be seen then that there is a need for a slider that has air bearing surface features which minimize the difference between the minimum mechanical slider/disk spacing and the magnetic head/disk spacing.

It can also be seen that there is a need for a slider having shallow etch features that allow optimization of transducer spacing.

It can also be seen that there is a need for a disk drive having a slider which exhibits a narrow trailing edge

rail while still providing adequate area for the read/write transducer thereby minimizing the difference between the minimum mechanical slider/disk spacing and the magnetic head/disk spacing.

SUMMARY OF THE INVENTION

To overcome the limitations in the prior art described above, and to overcome other limitations that will become apparent upon reading and understanding the present specification, the present invention discloses a shallow etch at the trailing edge rail that allows the slider to fly closer to the recording medium.

A system in accordance with the principles of the present invention comprises a support structure having side edges, a leading and a trailing edge relative to the motion of the recording medium and at least one rail having side edges and an air bearing surface raised above the support structure, wherein at least one of the rails comprises a magnetic element, and wherein the edges of the rail adjacent to the magnetic element are etched to minimize the fly height of the magnetic element over the disk while preventing collision of the rail with the disk during roll conditions. The etched features of the rail create relieved trailing edge portions where the edges of the rail adjacent

This Sheet Has Been Replaced



to the magnetic element may be lower than other air bearing surfaces but are higher than the support structure.

One aspect of the present invention is that the slider has air bearing features which minimize the difference between the minimum mechanical slider/disk spacing and the magnetic head/disk spacing.

Another aspect of the present invention is that the slider has shallow etch features that allow optimization of transducer spacing.

Another aspect of the present invention is that a disk drive may include a slider which exhibits a rail with a narrow trailing edge while still providing adequate area for the read/write transducer thereby minimizing the difference between the minimum mechanical slider/disk spacing and the magnetic head/disk spacing.

In an alternative embodiment the edges of the air bearing surface adjacent the magnetic element are shortened by etching or ion milling, i.e., they do not completely extend to the trailing edge.

These and various other advantages and features of novelty which characterize the invention are pointed out with particularity in the claims annexed hereto and form a part hereof. However, for a better understanding of the invention, its advantages, and the objects obtained by its

This Sheet Has Been Replaced



use, reference should be made to the drawings which form a further part hereof, and to accompanying descriptive matter, in which there are illustrated and described specific examples of an apparatus in accordance with the invention.

This Sheet Has Been Replaced

BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

Fig. 1a illustrates a prior art slider;

Fig. 1b illustrates the trailing edge of the center rail for the prior art slider of Fig. 1;

Fig. 2 illustrates a rear view of the prior art slider along lines A-A of Fig. 1a;

Fig. 3a illustrates a slider having shallow etch features according to the present invention;

Fig. 3b illustrates the trailing edge of the center rail for the slider having shallow etch features according to the present invention;

Fig. 4 illustrates a rear view of the slider having shallow etch features according to the present invention along lines B-B of Fig. 3a;

Fig. 5a illustrates a negative pressure slider design wherein the magnetic transducer is not mounted at the trailing edge;

Fig. 5b illustrates a slider with shallow etch features according to the present invention having the air bearing surface geometry of the slider in Fig. 5a; and

Fig. 6 is a table containing the modeling results for the minimum mechanical spacing, minimum gap spacing, and the difference therebetween for the sliders illustrated in Figs. 5a and 5b.

DETAILED DESCRIPTION OF THE INVENTION

In the following description of the preferred embodiment, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration the specific embodiment in which the invention may be practiced. It is to be understood that other embodiments may be utilized as structural changes may be made without departing from the scope of the present invention.

Fig. 3a illustrates a slider 100 according to the present invention which is similar to the prior art slider illustrated in Fig. 1a. The slider according to the present invention 100 includes a leading edge 112, a trailing edge 114 and two side edges 116, 118. Two side air bearing surfaces or rails 120, 122 and a center rail 124 for a given aerodynamic performance standard are disposed on a support structure 126. A transducer 128 is disposed on the center rail 124 at the trailing edge 114 for performing read/write operations on the disk. However, the center rail 124 includes shallow etch features 150 adjacent to the magnetic element 128 which causes a portion of the center rail 124 to be shortened a distance relative to the trailing edge 114 of the support structure 126. The shallow etching therefore

results in a notch 152 at the trailing edge 114 of the center rail 124 where the magnetic head gap 132 is disposed.

Fig. 3b illustrates a close-up view of the center rail 124 at the trailing edge 114 of the slider 100. The head gap 132 is also shown. However, according to the present invention, the above described roll conditions, indicated by angle 134, do not result in as great a difference between the mechanical slider/disk clearance or spacing and the magnetic head/disk spacing.

The shallow etch 150 effectively narrows the width of the center rail 124 at the trailing edge 114 while still providing adequate area for the read/write transducer 128. The shallow etched portion 150 of the center rail 124 includes relieved trailing edge portions 154 adjacent to the magnetic element 128 where portions of the center rail 124 are removed and therefore not raised above the support structure 126 to the same level as the remaining air bearing surface 156 of the center rail 124. Preferably, the depth of the etching step should be shallow enough to avoid interference with the element structure to minimize the impact on the transducer or air bearing design. Typically, the etching step depth is on the order of 0.5 μm or less. The shallow etching process may be performed by ion milling, reactive ion etching, or other appropriate techniques known

to those skilled in the art of slider manufacturing. Fig. 4 illustrates how a nominal roll angle 134 affects the mechanical and magnetic gap spacing of a slider according to the present invention.

Fig. 4. illustrates a rear view of the slider 100 along lines B-B of Fig. 3a. Again, the view in Fig. 4 is exaggerated for clarity. In Fig. 4, the center rail 124 is shown disposed on the support structure 126. As the slider 100 experiences a nominal roll angle 134, the mechanical spacing 140 between the edge 152 of the center rail 124 and the disk 144 does not impact the minimum mechanical spacing. Thus, the shallow etch portion 150 effectively reduces the width of the air bearing surface at the gap 148. Accordingly, the minimum mechanical spacing 140 for the slider occurs at the edge of the notch 152 in the tip of the center rail 124 where the magnetic head gap 148 is disposed. As a result, the minimum mechanical spacing 140 location is moved closer to the magnetic gap 146 and the difference between the minimum mechanical spacing 140 and the minimum magnetic spacing 146 is reduced. For example, a slider having a 0.125 μm etch depth and a resulting notch width of 80 μm which experiences a nominal 50 μrad flying roll

attitude will have a minimum mechanical spacing 40 that is only 2 nanometers (nm) lower than the desired magnetic spacing 46.

Those skilled in the art will recognize that the shallow etch features are not limited to utilization on center rails or on rails wherein the magnetic transducer is located adjacent to the trailing edge of the slider. Similar results can be achieved for planar head designs where the magnetic transducer is not located adjacent to the trailing edge of the slider.

Fig. 5a illustrates a standard negative pressure slider design 200 having a leading edge 212, a trailing edge 214 and two side edges 216, 218. Two side rails 220, 222 for a given performance standard are disposed on a support structure 226. The right side rail 220 includes a broadened area 260 at the trailing edge for supporting the transducer or magnetic head element 228 for performing read/write operations on the disk. The head gap 248 is illustrated at the trailing edge 214 of the right side rail 220. Each of the side rails 220, 222 includes a cross bar section 262 and a subrail 264 which creates a negative pressure pocket 266. Further, the two side rails 220, 222 are separated by a channel 268.

Fig. 5b illustrates a slider 300 according to the present invention having the air bearing surface geometry of the slider in Fig. 5a. However, as shown in Fig. 5b, a shallow etch 350 is made in the right side rail 320 adjacent the magnetic element 328. However, the magnetic element 328 is not disposed at the trailing edge 314 of the slider 300. The shape of the shallow etch 350 in Fig. 5b provides both minimal roll and pitch attitude sensitivity to the slider 300.

Fig. 6 illustrates the modeling results 400 for the standard 410 and shallow etched 412 designs of Figs. 5a and 5b. It is clear from Fig. 6 that the minimum mechanical fly heights 440 for the two negative pressure designs are substantially identical. However, the shallow etched negative pressure design 412 of Fig. 5b has a lower minimum gap fly height 446 than the standard negative pressure design 410 of Fig. 5a. Overall, the slider with the shaped shallow etch features according to the present invention has a read/write head gap spacing 470 approximately 4 nm lower than the design with this feature. Consequently, the slider with the shaped shallow etch features 412 yields an improved magnetic performance.

The foregoing description of the preferred and alternative embodiments of the invention have been presented

for the purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not with this detailed description, but rather by the claims appended hereto.

This Sheet Has Been Replaced

WHAT IS CLAIMED IS:

1. A slider for supporting a transducer above a moving recording medium, comprising:

a support structure having side edges, a leading and a trailing edge relative to the motion of the recording medium; and

at least one rail having side edges and an air bearing surface raised above the support structure, wherein at least one of the rails comprises a magnetic element, and wherein the edges of the rail proximate to the magnetic element are etched to minimize the fly height of the magnetic element over the recording medium and to maximize the clearance between the edges of the rail and the recording medium thereby preventing collision of the rail with the recording medium.

2. The slider of claim 1 wherein the magnetic element is supported at the trailing edge of the support structure.

3. The slider of claim 1 wherein the rail further comprises relieved trailing edge portions where the edges of the rail adjacent to the magnetic element are shortened relative to the trailing edge of the support structure.

* C L M S *

This Sheet Has Been Replaced

4. The slider of claim 1 wherein the rail having the magnetic element supported thereon is centered on the slider between the side edges of the support structure.

5. The slider of claim 1 wherein the rail having the magnetic element supported thereon is disposed along one side of the support structure.

6. The slider of claim 1 further comprising at least one additional rail for providing aerodynamic control of the slider.

7. The slider of claim 3 wherein the shortened edges of the rail adjacent the magnetic element are completely removed to the level of the support structure.

8. The slider of claim 1 wherein the edges of the rail adjacent the magnetic element are etched by reactive ion etching techniques.

9. The slider of claim 1 wherein the edges of the rail adjacent the magnetic element are etched by ion milling.

* C L M S *

This Sheet Has Been Replaced

10. The slider of claim 1 wherein the edges of the air bearing surface adjacent both sides of the magnetic element are removed.

11. The slider of claim 10 wherein the edges of the air bearing surface adjacent the magnetic element are removed to a level below the air bearing surface but above the support structure.

12. The slider of claim 1 wherein the edges of the air bearing surface adjacent the magnetic element are removed to a level below the air bearing surface but above the support structure.

* C L M S *

This Sheet Has Been Replaced

13. A slider for supporting a transducer, the slider flying over a moving recording disk and having a mechanical disk/slider clearance and a magnetic head/disk clearance, comprising:

a support structure having side edges, a leading and a trailing edge relative to the motion of the recording disk; and

at least one air bearing surface, disposed on the support structure facing the moving recording disk, wherein at least one of the air bearing surfaces provides a mounting surface for a magnetic head, and wherein at least one edge of the air bearing surface adjacent the magnetic head is removed to increase the mechanical clearance between the disk and the slider.

14. The slider of claim 13 wherein the edges of the air bearing surface adjacent both sides of the magnetic head are removed.

15. The slider of claim 13 wherein the air bearing surface providing the surface for mounting the magnetic head is positioned at the center of the slider.

* C L M S *

This Sheet Has Been Replaced

16. The slider of claim 15 wherein the edges of the air bearing surface adjacent both sides of the magnetic head are removed.

17. The slider of claim 16 wherein the edges of the air bearing surface adjacent the magnetic head are completely removed to expose the support structure.

18. The slider of claim 16 wherein the edges of the air bearing surface adjacent the magnetic head are removed to a level below the air bearing surface but above the support structure.

19. The slider of claim 16 wherein the edges of the air bearing surface adjacent the magnetic head are removed by reactive ion etching techniques.

20. The slider of claim 16 wherein the edges of the air bearing surface adjacent the magnetic head are removed by ion milling.

21. The slider of claim 13 wherein the edges of the air bearing surface adjacent the magnetic head are removed by reactive ion etching.

* C L M S *

This Sheet Has Been Replaced

22. The slider of claim 13 wherein the edges of the air bearing surface adjacent the magnetic head are removed by ion milling.

23. The slider of claim 13 wherein a portion of the air bearing surface adjacent to the magnetic head is shortened relative to the trailing edge of the support structure and the head is recessed from the trailing edge.

* C L M S *

This Sheet Has Been Replaced

24. A system for storing and retrieving information, comprising:

at least one rotating disk having a recording surface for recording data thereon;

a housing, coupled to the disk, for shielding the disk;

an actuator arm assembly, coupled to the housing;

a support structure, coupled to the actuator arm assembly approximate to the recording surface of the rotatable disk, the support structure being selectively positionable over the surface of the rotating disk by the actuator; the support structure having side edges, a leading and a trailing edge relative to the motion of the recording medium; and

at least one rail having side edges and an air bearing surface raised above the support structure, wherein at least one of the rails comprises a magnetic element mounted proximate the trailing edge of the rail, and wherein the edges of the rail proximate to the magnetic element are shortened a distance relative to the trailing edge of the support structure to minimize the fly height of the magnetic element over the disk, and to maximize the clearance between the edges of the rail and the recording medium for preventing collision of the rail with the recording medium.

* C L M S *

This Sheet Has Been Replaced

25. The slider of claim 21 wherein the rail further comprises relieved trailing edge portions where the edges of the rail adjacent to the magnetic element are shortened relative to the trailing edge of the support structure.

26. The slider of claim 21 wherein the rail having the magnetic element supported thereon is centered on the slider between the side edges of the support structure.

27. The slider of claim 21 wherein the rail having the magnetic element supported thereon is disposed along one side of the support structure.

28. The slider of claim 21 further comprising at least one additional rail for providing aerodynamic control of the slider.

29. The slider of claim 21 wherein the shortened edges of the rail adjacent the magnetic element are completely removed to the level of the support structure.

30. The slider of claim 21 wherein the edges of the rail adjacent the magnetic element are shortened by reactive ion etching.

* C L M S *

This Sheet Has Been Replaced

31. The slider of claim 21 wherein the edges of the rail adjacent the magnetic element are shortened by ion milling.

32. The slider of claim 24 wherein the edges of the air bearing surface adjacent both sides of the magnetic element are removed.

33. The slider of claim 32 wherein the edges of the air bearing surface adjacent the magnetic element are removed to a level below the air bearing surface but above the support structure.

34. The slider of claim 24 wherein the edges of the air bearing surface adjacent the magnetic element are removed to a level below the air bearing surface but above the support structure.

* C L M S *

This Sheet Has Been Replaced

35. A method for making a slider for optimizing head to disk spacing, comprising the steps of:

forming a support structure having side edges, a leading and a trailing edge;

forming at least one air bearing surface on the support structure, the air bearing surface facing the moving recording disk, the air bearing surfaces providing a mounting surface for a magnetic head; and

removing at least one edge of the air bearing surface adjacent the magnetic head to increase the mechanical clearance between the disk and the slider.

36. The method of claim 35 further comprising the step of removing edges of the air bearing surface adjacent both sides of the magnetic head.

37. The method of claim 35 wherein the step of providing the surface for mounting the magnetic head further comprises the step of positioning the magnetic head at the center of the slider.

* C L M S *

This Sheet Has Been Replaced

38. The method of claim 35 wherein the step of removing the edges of the air bearing surface adjacent the magnetic head comprises the step of completely removing the edges to expose the support structure.

39. The method of claim 35 wherein the step of removing the edges of the air bearing surface adjacent.the magnetic head comprises the step of removing the edges to a level below the air bearing surface but above the support structure.

40. The method of claim 35 wherein the step of removing the edges of the air bearing surface adjacent the magnetic head further comprises the step of removing the edges by reactive ion etching techniques.

41. The method of claim 35 wherein the step of removing the edges of the air bearing surface adjacent the magnetic head further comprises the step of removing the edges by ion milling.

* C L M S *

This Sheet Has Been Replaced

42. The method of claim 29 wherein the step of removing a portion of the air bearing surface adjacent to the magnetic head further comprises the steps of shortening the air bearing surface relative to the trailing edge of the support structure and recessing the head from the trailing edge.

* C L M S *

SHALLOW ETCH AIR BEARING SURFACE FEATURES FOR OPTIMIZED TRANSDUCER SPACING

ABSTRACT

A shallow etch at the trailing edge rail that allows the slider to fly closer to the recording medium and exhibit less sensitivity to roll. The slider includes a support structure and at least one rail having side edges and an air bearing surface raised above the support structure. At least one of the rails comprises a magnetic element disposed on the support structure. The edges of the rail adjacent to the magnetic element are etched to minimize the fly height of the magnetic element over the disk while preventing collision of the rail with the disk during roll conditions. The shallow etch in the air bearing surface minimizes the difference between the minimum mechanical slider/disk spacing and the magnetic head disk spacing which in turn allows optimization of transducer spacing.

Fig. 3a and 3b

This Sheet Has Been Replaced



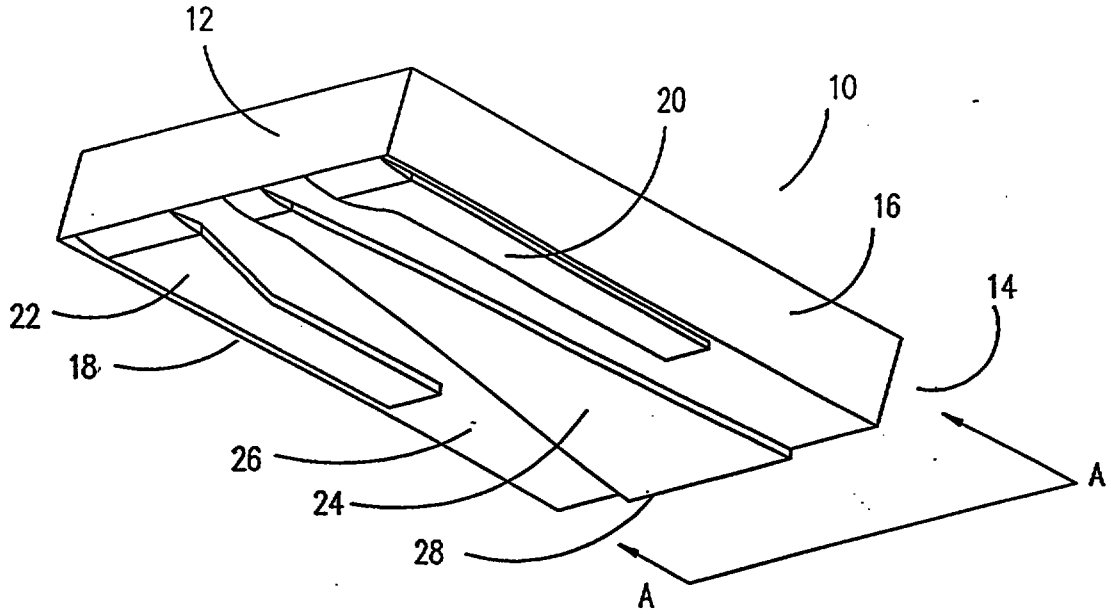


FIG. 1A

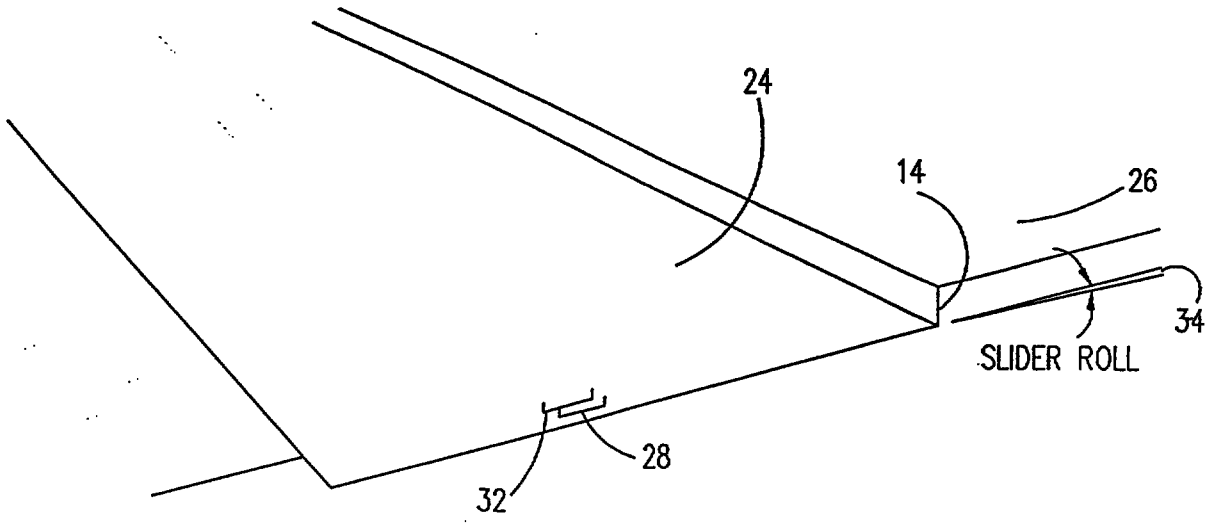


FIG. 1B

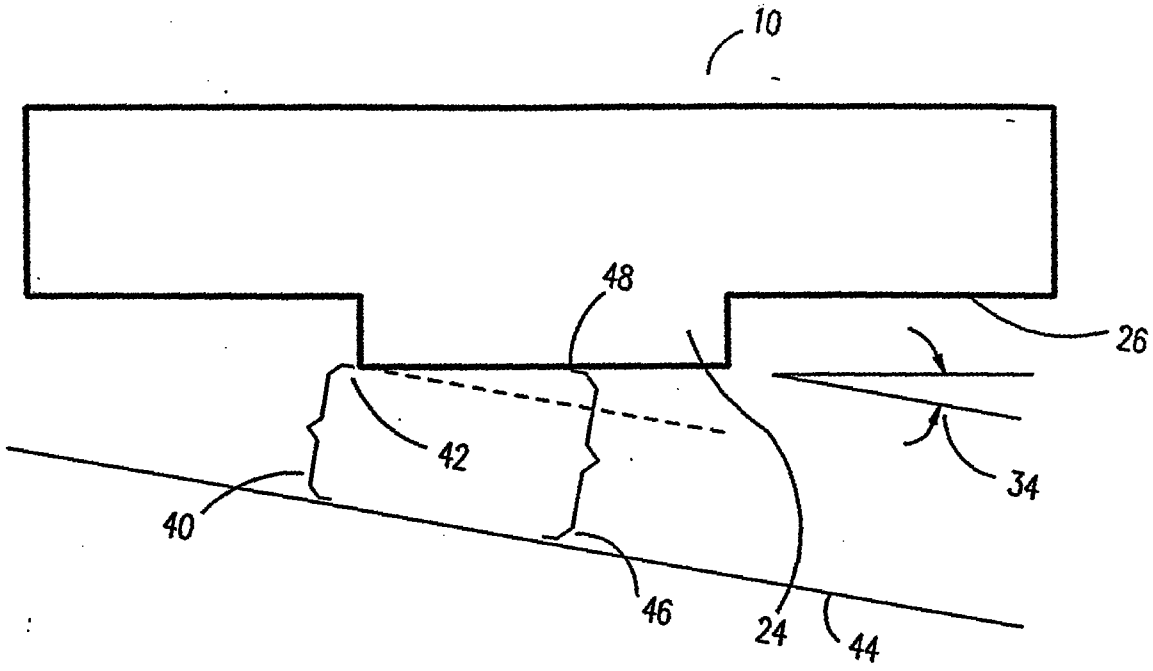


FIG. 2

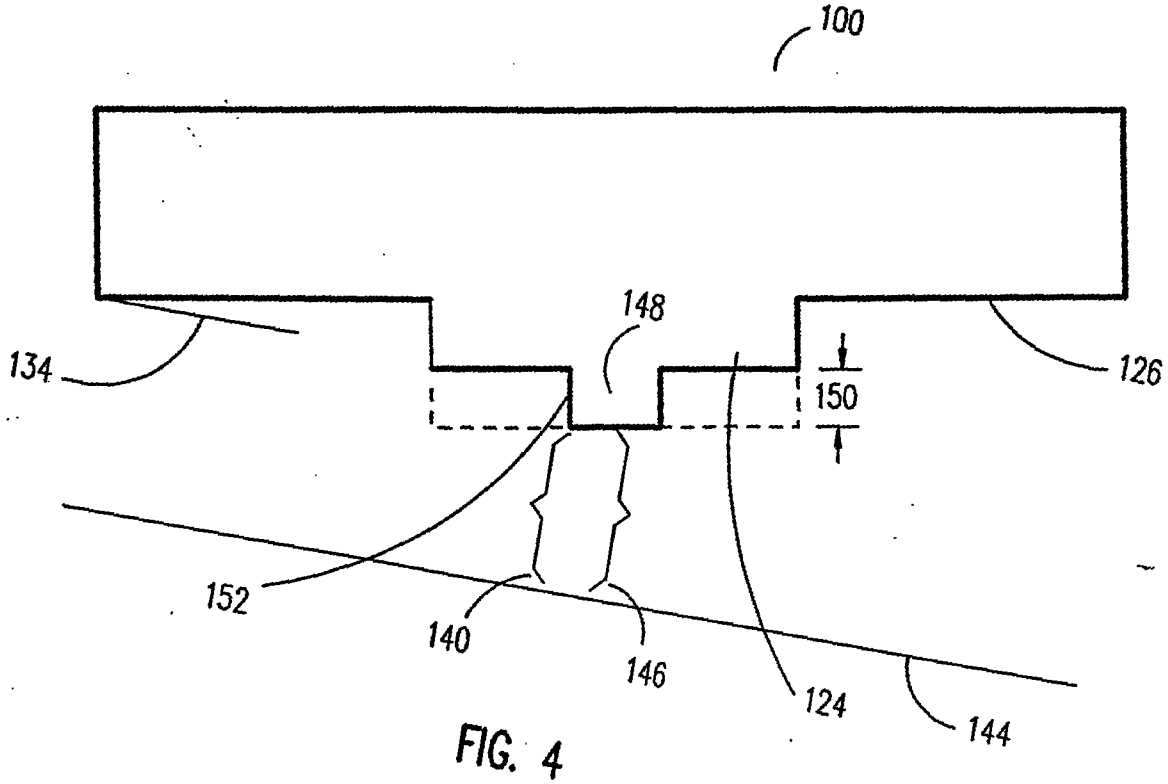


FIG. 4

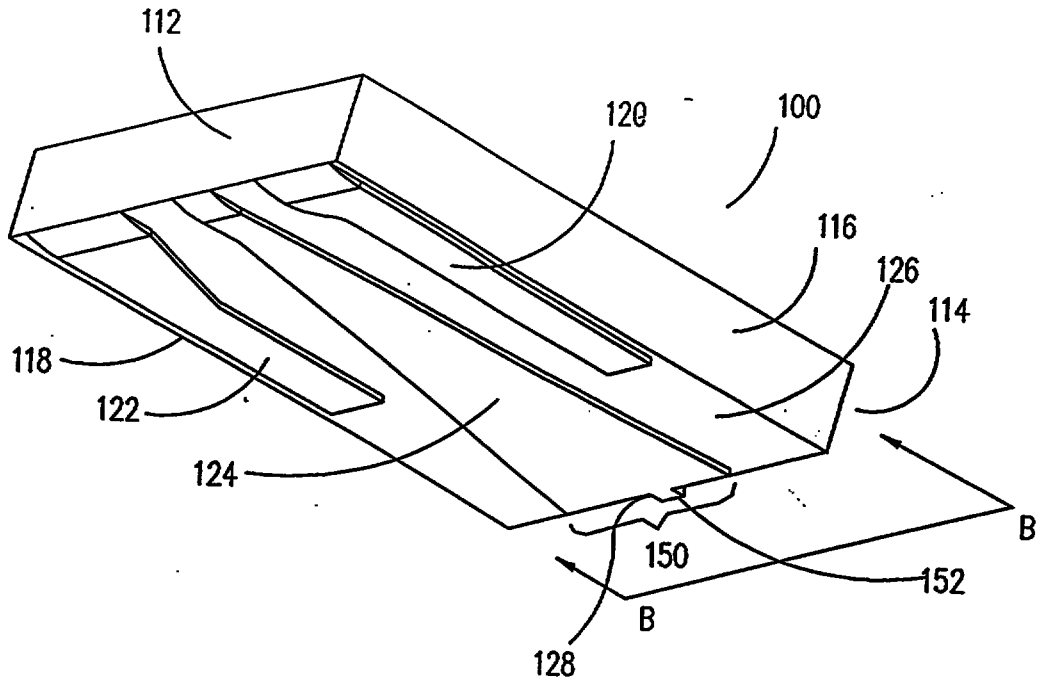

112
120
100
116
126
114
118
122
124
150
152
B
B
128

FIG. 3A

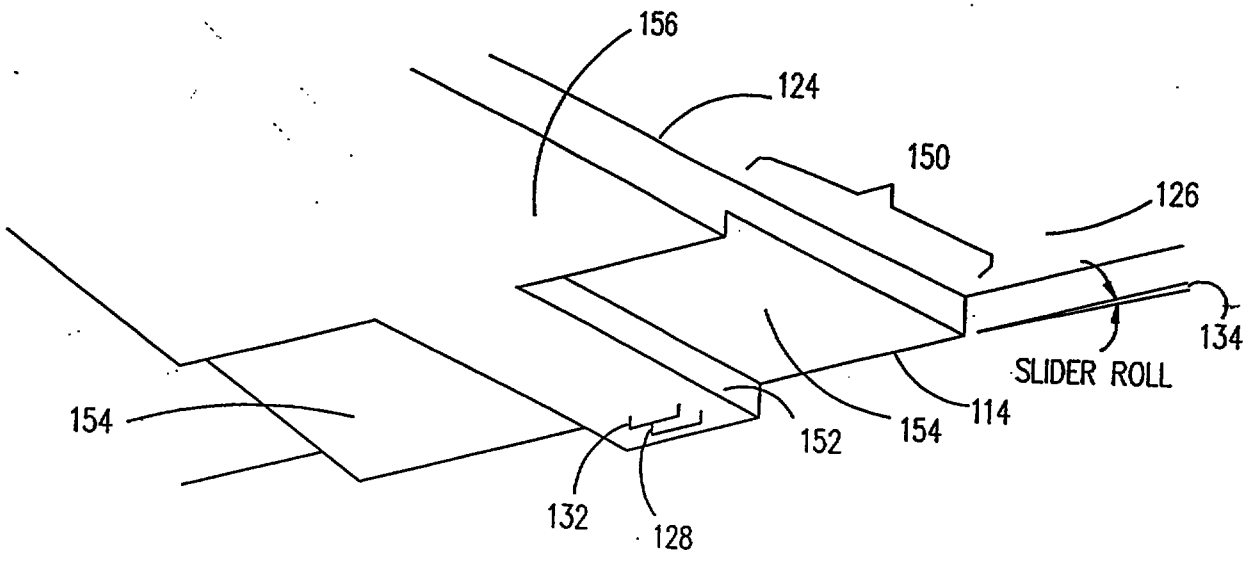

156
124
150
126
134
SLIDER ROLL
154
114
152
154
132
128

FIG. 3B

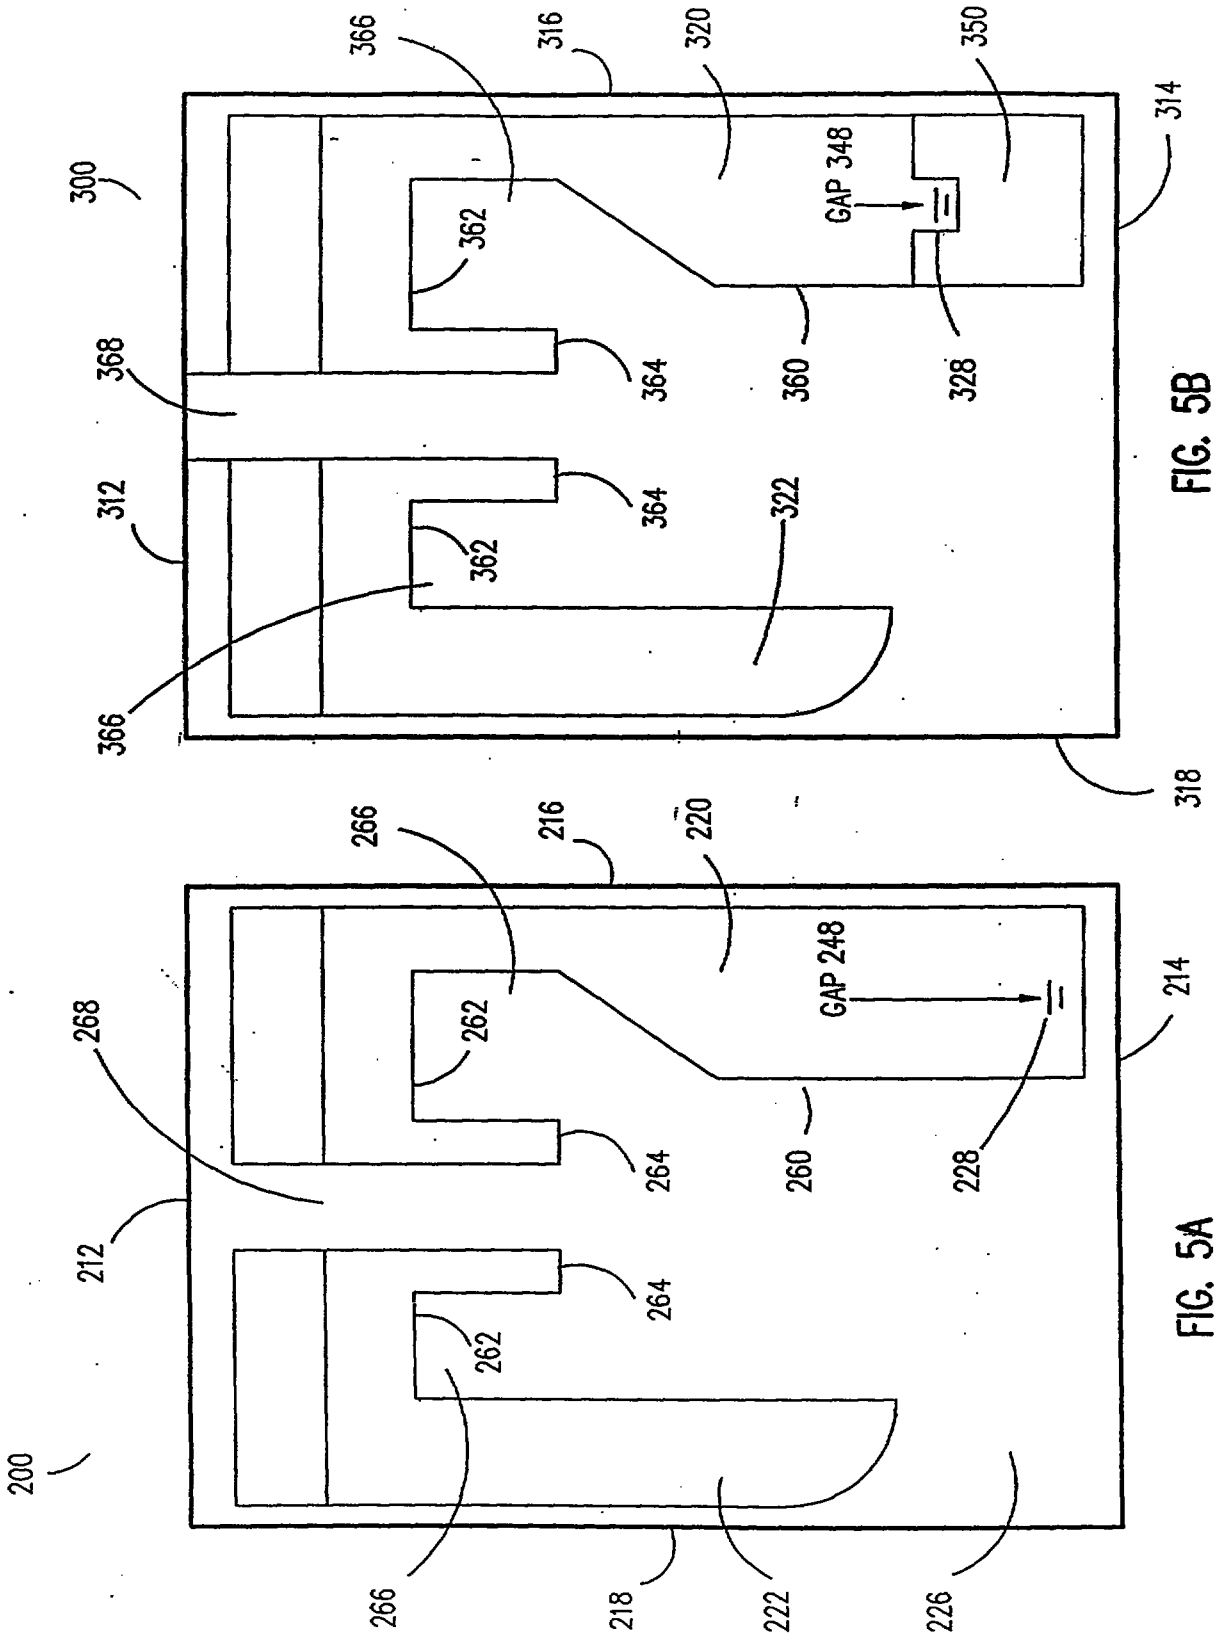

300
366
316
320
350
314
362
GAP 348
368
364
360
328
312
322
318
200
266
216
220
GAP 248
214
268
262
212
264
260
228
218
222
226

FIG. 5B

FIG. 5A

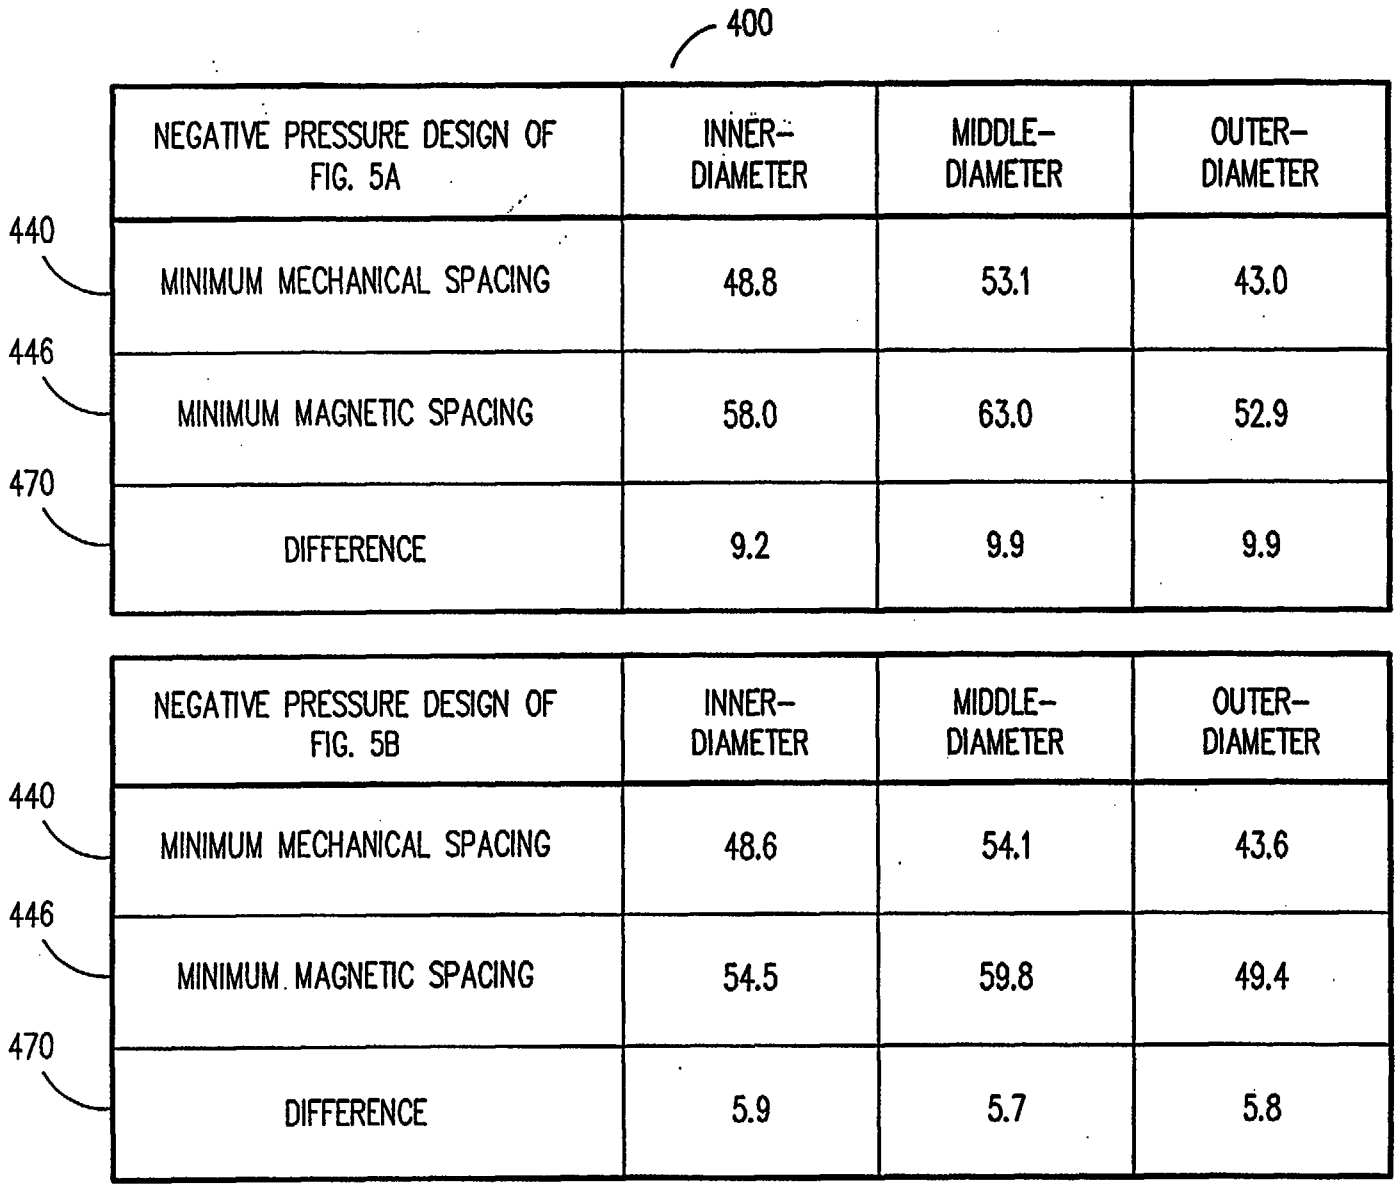

400
NEGATIVE PRESSURE DESIGN OF FIG. 5A
INNER-DIAMETER
MIDDLE-DIAMETER
OUTER-DIAMETER
410
440
MINIMUM MECHANICAL SPACING
48.8
53.1
43.0
446
MINIMUM MAGNETIC SPACING
58.0
63.0
52.9
470
DIFFERENCE
9.2
9.9
9.9
NEGATIVE PRESSURE DESIGN OF FIG. 5B
INNER-DIAMETER
MIDDLE-DIAMETER
OUTER-DIAMETER
412
440
MINIMUM MECHANICAL SPACING
48.6
54.1
43.6
446
MINIMUM MAGNETIC SPACING
54.5
59.8
49.4
470
DIFFERENCE
5.9
5.7
5.8

FIG. 6

rail while still providing adequate area for the read/write transducer thereby minimizing the difference between the minimum mechanical slider/disk spacing and the magnetic head/disk spacing.

SUMMARY OF THE INVENTION

To overcome the limitations in the prior art described above, and to overcome other limitations that will become apparent upon reading and understanding the present specification, according to a first aspect of the invention there is provided a slider for supporting a transducer above a moving recording medium, comprising:

a support structure having support structure side edges, a leading and a trailing edge relative to the motion of the recording medium;

a rail centered on the support structure between the support structure side edges, the rail having rail side edges and an air bearing surface raised above the support structure, the air bearing surface including an intermediate projection located at a trailing end of the rail, wherein the rail comprises a magnetic element mounted at the intermediate projection, and wherein the rail includes relieved trailing edge portions located on opposite sides of the intermediate projection only at the trailing end of the rail, the relieved trailing edge portions being arranged and configured to increase the clearance between the rail side edges and the recording medium thereby preventing collision of the rail with the recording medium when the slider rolls.

Preferably, the magnetic element is supported at the trailing edge of the support structure.

REPLACEMENT SHEETS SG
☑ Description : paged 1, 8, 8a, 9, 9a to paged —
☑ Claim(s) : paged 18 to paged 22
☐ Drawing(s) : paged — to paged —
☑ Abstract : paged 23 to paged —
DATE OF RECEIPT 25-9-99

This is the replacement sheet
Date: 25 SEP 1999

The relieved trailing edge portions may shorten the side edges of the rail relative to the trailing edge of the support structure.

In a preferred embodiment, the rail having the magnetic element supported thereon is disposed along one side of the support structure.

Preferably, the slider further comprises at least one additional rail for providing aerodynamic control of the slider.

The relieved trailing edge portions of the rail adjacent the magnetic element may be etched by reactive ion etching techniques.

The relieved trailing edge portions of the rail adjacent the magnetic element may be etched by ion milling.

In a preferred embodiment, the relieved trailing edge portions are removed to a level below the air bearing surface but above the support structure.

Preferably, the relieved trailing edge portions of the rail are symmetrical about a centerline of the rail.

The relieved trailing edge portions preferably have lengths that are substantially shorter than the length of the rail.

According to a second aspect of the invention there is provided a slider for supporting a transducer, the slider flying over a moving recording disk and having a mechanical clearance between the disk and the slider, comprising:

a support structure having a leading and a trailing edge relative to the motion of the recording disk; and

at least one air bearing surface, disposed on the support structure facing the moving recording disk, wherein at least one of the air bearing surfaces includes side edges and a projection having a mounting surface for a magnetic head, and wherein

This is the replacement sheet
Date: 25 SEP 1999

the projection is formed by recesses located on opposite sides of the projection which shorten the side edges of the air bearing surface relative to the trailing edge of the support structure, the recesses being etched to a level below the air bearing surface but above the support structure, and the recesses being arranged and configured to increase the mechanical clearance between the disk and the slider.

Preferably, the air bearing surface providing the surface for mounting the magnetic head is positioned at the center of the slider.

Preferably, the recesses are removed by reactive ion etching techniques.

In a preferred embodiment, the recesses are removed by ion milling.

The recesses are preferably at least partially defined by a trailing edge of the air bearing surface.

According to a third aspect of the invention there is provided a system for storing and retrieving information, comprising:

at least one rotating disk having a recording surface for recording data thereon;

a housing, coupled to the disk, for shielding the disk;

an actuator arm assembly, coupled to the housing;

a support structure, coupled to the actuator arm assembly approximate to the recording surface of the rotatable disk, the support structure being selectively positionable over the surface of the rotating disk by the actuator; the support structure having side edges, a leading and a trailing edge relative to the motion of the recording medium; and

at least one rail having side edges and an air bearing surface raised above the support structure, wherein at least one of the rails comprises a magnetic element

This is the replacement sheet
Date: 25 SEP 1999

mounted proximate a trailing edge of the rail, and wherein the rail includes recesses located at the trailing edge of the rail on opposite sides of the magnetic element, the recesses being configured to shorten the side edges of the rail a distance relative to the trailing edge of the support structure, the recesses being recessed to a level below the air bearing surface but above the support structure such that clearance between the side edges of the rail and the recording medium is increased for preventing collision of the rail with the recording medium.

Preferably, the rail having the magnetic element supported thereon is centered on the slider between the side edges of the support structure.

Preferably, the rail having the magnetic element supported thereon is disposed along one side of the support structure.

In a preferred embodiment, the slider further comprises at least one additional rail for providing aerodynamic control of the slider.

Preferably, the recesses are made by reactive ion etching.

The recesses may be made by ion milling.

According to a fourth aspect of the present invention there is provided a slider for supporting a transducer above a moving recording medium, comprising:

a support structure having a leading and a trailing edge relative to the motion of the recording medium;

a rail having side edges and an air bearing surface raised above the support structure, the air bearing surface including an intermediate projection located at a trailing end of the rail, wherein the rail comprises a magnetic element mounted at the intermediate projection, and wherein the rail includes relieved trailing edge portions located on opposite sides of the intermediate projection only at the trailing end of the

This is the replacement sheet

Date: 25 SEP 1999

rail, the relieved trailing edge portions being arranged and configured to increase the clearance between the edges of the rail and the recording medium thereby preventing collision of the rail with the recording medium when the slider rolls, wherein the intermediate projection has a first width transversely aligned with respect to a longitudinal axis of the rail, the relieved trailing edge portions have second widths transversely aligned with respect to the longitudinal axis of the rail, and each of the second widths of the relieved trailing edge portions is longer than the first width of the intermediate projection.

Aspects of the invention will now be described by way of example and with reference to the accompanying drawings.

This is the replacement sheet

Date: 25 SEP 1999

What is claimed is:

1. A slider for supporting a transducer above a moving recording medium, comprising:

a support structure having support structure side edges, a leading and a trailing edge relative to the motion of the recording medium;

a rail centered on the support structure between the support structure side edges, the rail having rail side edges and an air bearing surface raised above the support structure, the air bearing surface including an intermediate projection located at a trailing end of the rail, wherein the rail comprises a magnetic element mounted at the intermediate projection, and wherein the rail includes relieved trailing edge portions located on opposite sides of the intermediate projection only at the trailing end of the rail, the relieved trailing edge portions being arranged and configured to increase the clearance between the rail side edges and the recording medium thereby preventing collision of the rail with the recording medium when the slider rolls.

2. The slider of claim 1 wherein the magnetic element is supported at the trailing edge of the support structure.

3. The slider of claim 1 wherein the relieved trailing edge portions shorten the side edges of the rail relative to the trailing edge of the support structure.

4. The slider of claim 1 wherein the rail having the magnetic element supported thereon is disposed along one side of the support structure.

5. The slider of claim 1 further comprising at least one additional rail for providing aerodynamic control of the slider.

6. The slider of claim 1 wherein the relieved trailing edge portions of the rail adjacent the magnetic element are etched by reactive ion etching techniques.

This is the replacement sheet



Date: 25 SEP 1999

7. The slider of claim 1 wherein the relieved trailing edge portions of the rail adjacent the magnetic element are etched by ion milling.

8. The slider of claim 1 wherein the relieved trailing edge portions are removed to a level below the air bearing surface but above the support structure.

9. The slider of claim 1, wherein the relieved trailing edge portions of the rail are symmetrical about a centerline of the rail.

10. The slider of claim 1, wherein the relieved trailing edge portions have lengths that are substantially shorter than the length of the rail.

11. A slider for supporting a transducer, the slider flying over a moving recording disk and having a mechanical clearance between the disk and the slider, comprising:

a support structure having a leading and a trailing edge relative to the motion of the recording disk; and

at least one air bearing surface, disposed on the support structure facing the moving recording disk, wherein at least one of the air bearing surfaces includes side edges and a projection having a mounting surface for a magnetic head, and wherein the projection is formed by recesses located on opposite sides of the projection which shorten the side edges of the air bearing surface relative to the trailing edge of the support structure, the recesses being etched to a level below the air bearing surface but above the support structure, and the recesses being arranged and configured to increase the mechanical clearance between the disk and the slider.

12. The slider of claim 11 wherein the air bearing surface providing the surface for mounting the magnetic head is positioned at the center of the slider.

* C L M S *

This is the replacement sheet

Date: 25 SEP 1999

13. The slider of claim 11 wherein the recesses are removed by reactive ion etching techniques.

14. The slider of claim 11 wherein the recesses are removed by ion milling.

15. The slider of claim 11, wherein the recesses are at least partially defined by a trailing edge of the air bearing surface.

16. A system for storing and retrieving information, comprising:

at least one rotating disk having a recording surface for recording data thereon;

a housing, coupled to the disk, for shielding the disk;

an actuator arm assembly, coupled to the housing;

a support structure, coupled to the actuator arm assembly approximate to the recording surface of the rotatable disk, the support structure being selectively positionable over the surface of the rotating disk by the actuator; the support structure having side edges, a leading and a trailing edge relative to the motion of the recording medium; and

at least one rail having side edges and an air bearing surface raised above the support structure, wherein at least one of the rails comprises a magnetic element mounted proximate a trailing edge of the rail, and wherein the rail includes recesses located at the trailing edge of the rail on opposite sides of the magnetic element, the recesses being configured to shorten the side edges of the rail a distance relative to the trailing edge of the support structure, the recesses being recessed to a level below the air bearing surface but above the support structure such that clearance between the

* C L M S *

This is the replacement sheet

Date: 25 SEP 1999

side edges of the rail and the recording medium is increased for preventing collision of the rail with the recording medium.

17. The slider of claim 16 wherein the rail having the magnetic element supported thereon is centered on the slider between the side edges of the support structure.

18. The slider of claim 16 wherein the rail having the magnetic element supported thereon is disposed along one side of the support structure.

19. The slider of claim 16 further comprising at least one additional rail for providing aerodynamic control of the slider.

20. The slider of claim 16 wherein the recesses are made by reactive ion etching.

21. The slider of claim 16 wherein the recesses are made by ion milling.

22. A slider for supporting a transducer above a moving recording medium, comprising:

a support structure having a leading and a trailing edge relative to the motion of the recording medium;

a rail having side edges and an air bearing surface raised above the support structure, the air bearing surface including an intermediate projection located at a trailing end of the rail, wherein the rail comprises a magnetic element mounted at the intermediate projection, and wherein the rail includes relieved trailing edge portions located on opposite sides of the intermediate projection only at the trailing end of the rail, the relieved trailing edge portions being arranged and configured to increase the clearance between the edges of the rail and the recording medium thereby preventing collision of the rail with the recording medium when the slider rolls, wherein the

This is the replacement sheet

* C L M S *

Date: 25 SEP 1999

intermediate projection has a first width transversely aligned with respect to a longitudinal axis of the rail, the relieved trailing edge portions have second widths transversely aligned with respect to the longitudinal axis of the rail, and each of the second widths of the relieved trailing edge portions is longer than the first width of the intermediate projection.

* C L M S *

This is the replacement sheet

Date: 25 SEP 1999

SHALLOW ETCH AIR BEARING SURFACE FEATURES FOR OPTIMIZED TRANSDUCER SPACING

ABSTRACT

A shallow etch at the trailing edge rail that allows the slider to fly closer to the recording medium and exhibit less sensitivity to roll. The slider includes a support structure and at least one rail having side edges and an air bearing surface raised above the support structure. At least one of the rails comprises a magnetic element disposed on the support structure. The edges of the rail adjacent to the magnetic element are etched to minimize the fly height of the magnetic element over the disk while preventing collision of the rail with the disk during roll conditions. The shallow etch in the air bearing surface minimizes the difference between the minimum mechanical slider/disk spacing and the magnetic head disk spacing which in turn allows optimization of transducer spacing.

Fig. 3a and 3b

This is the replacement sheet

Date: 25 SEP 1999