



- (51) International Patent Classification:
E21B 19/16 (2006.01) *B25B 5/14* (2006.01)
- (21) International Application Number:
PCT/NO2013/050097
- (22) International Filing Date:
29 May 2013 (29.05.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20120632 30 May 2012 (30.05.2012) NO
- (71) Applicant: NATIONAL OILWELL VARCO NORWAY AS [NO/NO]; Serviceboks 401, N-4604 Kristiansand S (NO).
- (72) Inventors: WEBB, Jonathan Garrick; Andøysløyfen 41, N-4623 Kristiansand (NO). ROSANO, Hugo Leonardo; Høietun 51, N-4619 Kristiansand (NO). HILL, David Allan; Lerkeveien 18B, N-4622 Kristiansand (NO). MOEN, Trond Werner; Kirsten Flagstadsvei 4, N-4621 Kristiansand (NO).


- (74) Agent: HÅMSØ PATENTBYRÅ ANS; P.O. Box 171, N-4302 Sandnes (NO).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

- (54) Title: A DIE HOLDER DEVICE FOR OILFIELD USE AND METHOD FOR UTILIZING THE SAME

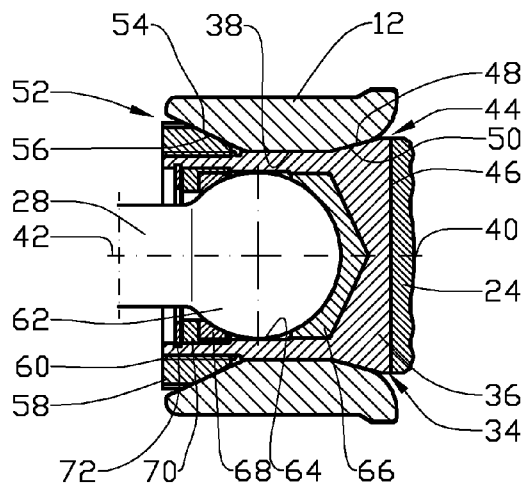

II-II

Fig. 3

- (57) Abstract: A die holder device for oilfield use and a method for operating same where a die holder (34), that has an axial centre line (40), is adapted to receive a clamp die (24) and where the die holder (34) is included in a clamp arm (12, 16) or slide block (20), wherein the die holder (34) is restricted from axial movement by at least a first complete or partial conical surface (48) or a second complete or partial conical surface (54) that directly or indirectly bears against the clamp arm (12, 16) or the slide block (20).



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))