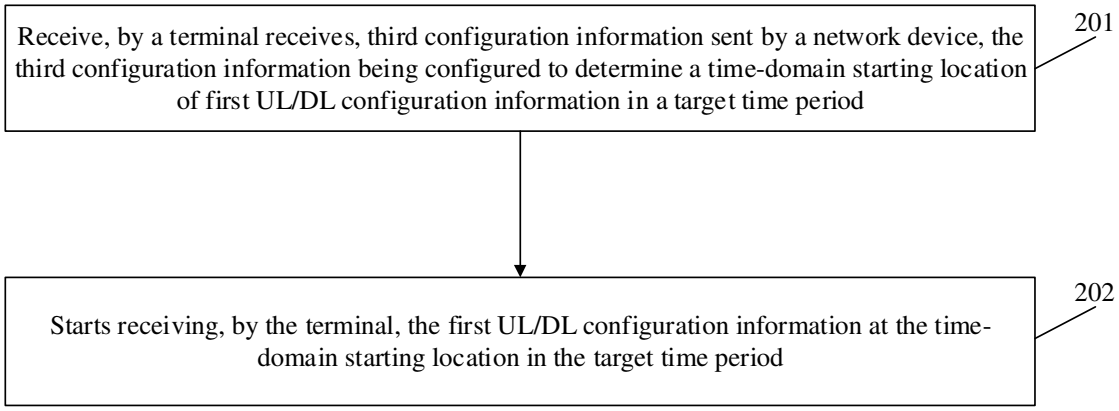
Receive, by a terminal receives, third configuration information sent by a network device, the third configuration information being configured to determine a time-domain starting location of first UL/DL configuration information in a target time period
201
Starts receiving, by the terminal, the first UL/DL configuration information at the time-domain starting location in the target time period
202

Fig. 2

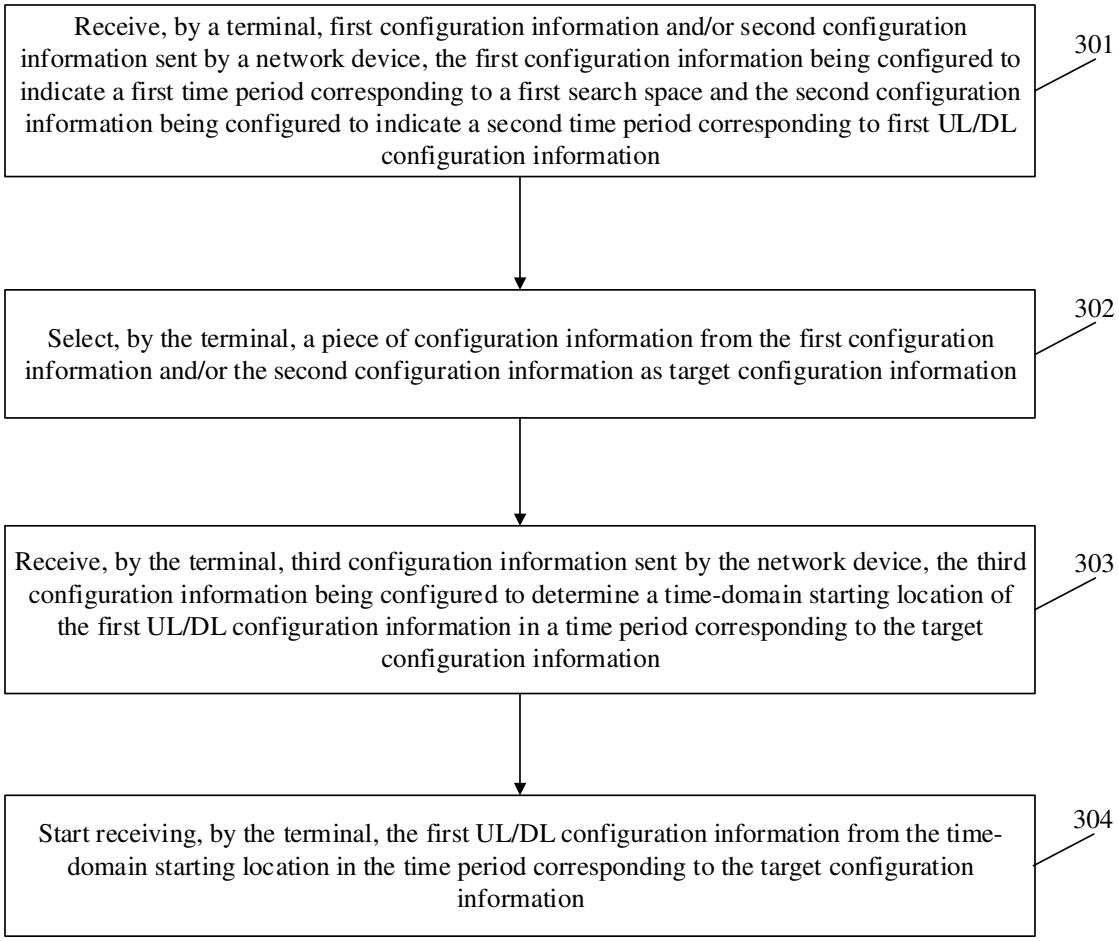
Receive, by a terminal, first configuration information and/or second configuration information sent by a network device, the first configuration information being configured to indicate a first time period corresponding to a first search space and the second configuration information being configured to indicate a second time period corresponding to first UL/DL configuration information
301
Select, by the terminal, a piece of configuration information from the first configuration information and/or the second configuration information as target configuration information
302
Receive, by the terminal, third configuration information sent by the network device, the third configuration information being configured to determine a time-domain starting location of the first UL/DL configuration information in a time period corresponding to the target configuration information
303
Start receiving, by the terminal, the first UL/DL configuration information from the time-domain starting location in the time period corresponding to the target configuration information
304

Fig. 3

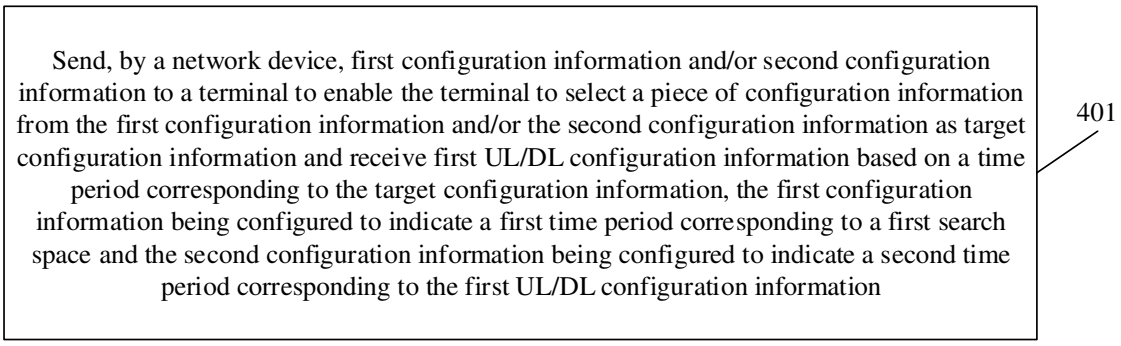

Fig. 4

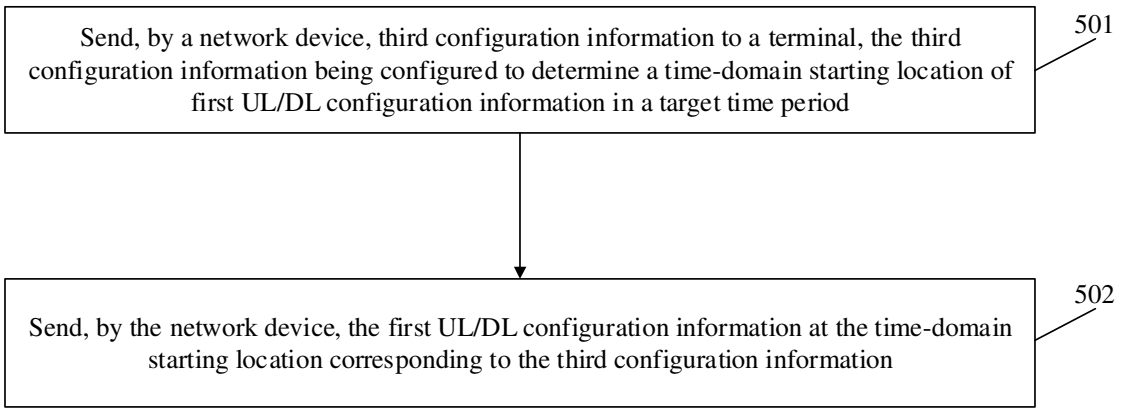

Fig. 5

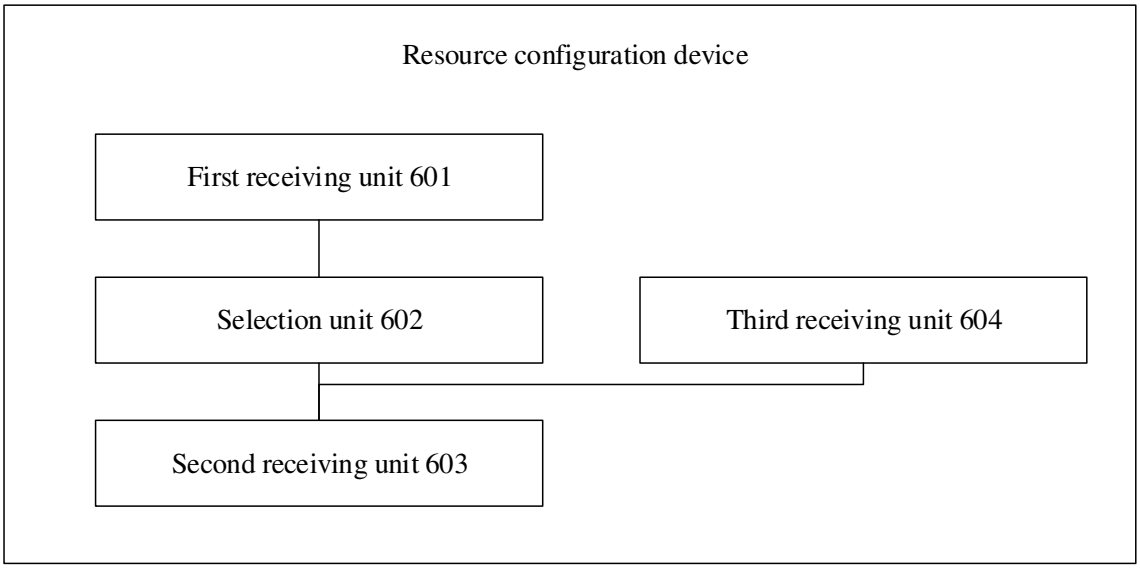

Fig. 6