

6 Mar 03
2003010519



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 March 2002 (14.03.2002)

PCT

(10) International Publication Number
WO 02/20325 A1

(51) International Patent Classification⁷: B61B 13/04

(21) International Application Number: PCT/NZ01/00184

(22) International Filing Date:
7 September 2001 (07.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
506819 8 September 2000 (08.09.2000) NZ

(71) Applicant and

(72) Inventor: CHAPMAN, Lawrence, Hugh [NZ/NZ]; 59
Felton Mathew Avenue, St Johns, Auckland 1005 (NZ).

(74) Agents: WILSON, Kathryn, S. et al.; Level 12, KPMG
Centre, 85 ALexandra Street, Private Bag, Hamilton 3140
(NZ).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU,
ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: TRANSPORTATION SYSTEM

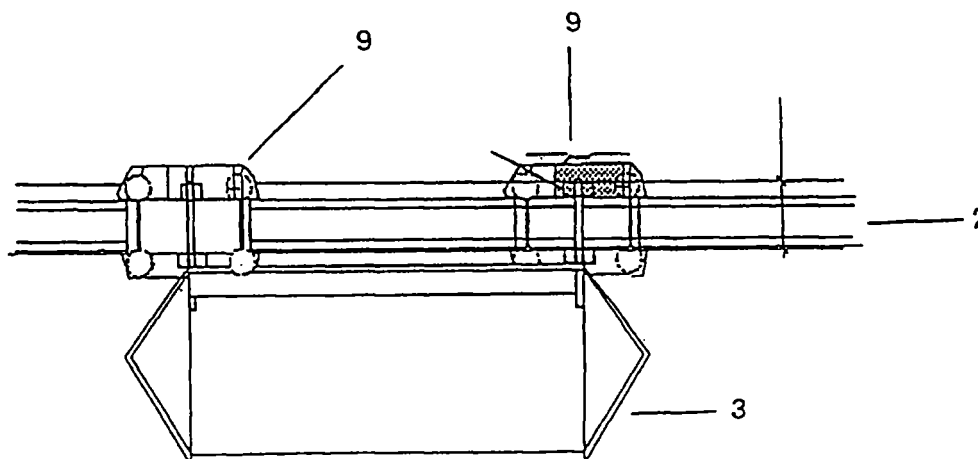

(57) Abstract: The present invention relates to an improved transportation system which includes a plurality of upright supports (1) which elevate at least one track (2). A plurality of cabs (3) are adapted to move along the track or tracks (2) provided where the cabs (3) suspended from a track (2) so that the centre of mass of the cabs (3) is located below the track (2). A single track (2) provides a pair of rail elements on opposite sides of the track (2) where the first rail element is adapted to support cabs (3) moving in substantially the opposite direction to cabs (3) supported by the second rail element of the same track (2).

WO 02/20325 A1



ACTION