

25/07/03
2003054657

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



162162

(43) International Publication Date
15 August 2002 (15.08.2002)


PCT

(10) International Publication Number
WO 2002/062125 A3

- (51) International Patent Classification⁷: **E02F 3/04**
- (21) International Application Number:
PCT/US2001/050738
- (22) International Filing Date:
31 December 2001 (31.12.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/776,020 2 February 2001 (02.02.2001) US
- (71) Applicant (for all designated States except US): **ESCO CORPORATION** [US/US]; 2141 N.W. 25th Avenue, Portland, OR 97210 (US).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **OLLINGER, Charles, G.** [US/US]; 20570 S.W. Anna Court, Aloha, OR 97006-6453 (US).
- (74) Agents: **DEKOCK, Bruce, W.** et al.; Chernoff, Vilhauer, McClung & Stenzel, LLP, 1600 Ods Tower, 601 S.W. Second Avenue, Portland, OR 97204-3157 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: DREDGE CUTTERHEAD

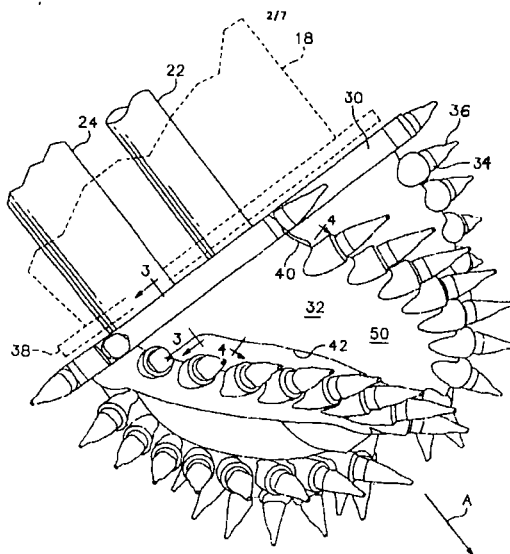

(57) Abstract: A dredge cutterhead has a plurality of helical arms (32) interconnecting a hub (28) and a ring (30). Each of the arms (32) has a front leading edge (40) for attachment of cutting teeth (34). In one aspect, each of the arms (32) has a trough (44) portion, and the arm (32) is shaped such that dredged material is directed toward the ring (30) along the center of the trough portion (44). In another aspect, the ring (30) of the cutterhead defines an annular channel (66) for receiving loosened material.

WO 2002/062125 A3



ACTION

WO 2002/062125 A3

- (88) **Date of publication of the international search report:** 21 August 2003
- (48) **Date of publication of this corrected version:** 31 December 2003
- (15) **Information about Correction:**
see PCT Gazette No. 01/2004 of 31 December 2003, Section II
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*