

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 March 2003 (13.03.2003)

PCT

(10) International Publication Number
WO 03/021139 A3

(51) International Patent Classification⁷: **B65D 25/40** (81) Designated States (*national*): AU, CA, CN, JP, MX, SG.

(21) International Application Number: PCT/US02/19120 (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(22) International Filing Date: 14 June 2002 (14.06.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/944,700 31 August 2001 (31.08.2001) US

(71) Applicant: **SONOCO DEVELOPMENT, INC.**
[US/US]; North Second Street, Hartsville, SC 29550 (US).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report
- with amended claims

(88) Date of publication of the international search report:
25 September 2003


(72) Inventor: **JOHANSON, James**; 52 Church Street, Chatham, NY 12037 (US).

Date of publication of the amended claims: 6 November 2003

(74) Agent: **FASSNACHT, Harold**; Bullwinkel Partners, Ltd., 19 S. LaSalle Street, Suite 1300, Chicago, IL 60603 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PRESSURE-ACTIVATED FLEXIBLE VALVE

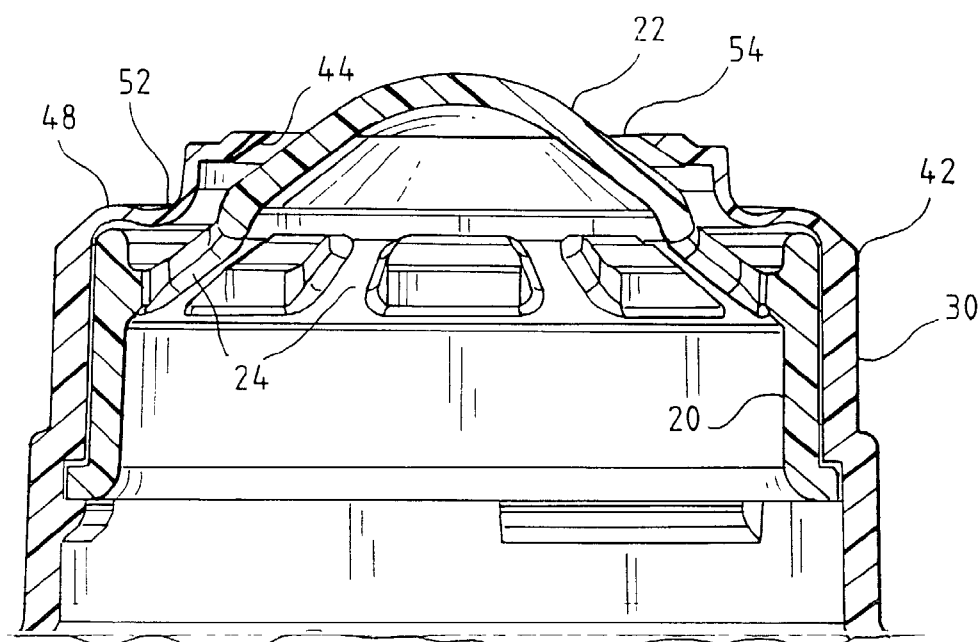

(57) **Abstract:** A pressure-activated flexible valve (10) for use with a container for dispensing fluid material. The valve (10) has a single sealing surface and comprises an inner component (12) having a sealing portion (22) and an outer component (14) having an annular rim (44) that seats against the sealing portion (22). The outer component (14) also has a flexible portion (40) that changes shape in response to pressure from the container material, thereby opening and closing the valve (10).

WO 03/021139 A3