

BATTERY BASED ON ORGANOSULFUR SPECIES

Field of the Invention

The invention relates to batteries having an anode based on sodium, lithium or
5 mixture thereof or alloy or composite of sodium and/or lithium with one or more other
metals and a cathode based on elemental sulfur, selenium, or mixture of elemental
chalcogens, the anode and cathode being separated by a separator element with a
liquid or gel electrolyte solution of a conductive salt in a nonaqueous polar aprotic
solvent or polymer in contact with the electrodes.

10

Background of the Invention

Electrochemical batteries are a principal means for storing and delivering
electrical energy. Due to increasing demands for energy for electronic, transportation
and grid-storage applications, the need for batteries with ever more power storage and
15 delivery capability will continue long into the future.

Because of their light weight and high energy storage capacity as compared to
other types of batteries, lithium ion batteries have been widely used since the early
1990's for portable electronic applications. However, current Li-ion battery
technology does not meet the high power and energy needs for large applications such
20 as grid storage or electric vehicles with driving ranges that are competitive with
vehicles powered by internal combustion engines. Thus, extensive efforts in the
scientific and technical communities continue to identify batteries with higher energy
density and capacity.

Sodium-sulfur and lithium-sulfur electrochemical cells offer even higher
25 theoretical energy capacity than Li-ion cells and thus have continued to elicit interest
as "next-generation" battery systems. Electrochemical conversion of elemental sulfur
to the monomeric sulfide (S^{2-}) offers a theoretical capacity of 1675 mAh/g as
compared to less than 300 mAh/g for Li-ion cells.

Sodium-sulfur batteries have been developed and launched as commercial
30 systems. Unfortunately, the sodium-sulfur cell typically requires high temperatures
(above 300°C) to be functional, and thus is only suitable for large stationary
applications.

Lithium-sulfur electrochemical cells, initially proposed in the late 1950's and
1960's, are only now being developed as commercial battery systems. These cells

offer theoretical specific energy densities above 2500 Wh/kg (2800 Wh/L) vs. 624 Wh/g for lithium ion. The demonstrated specific energy densities for Li-S cells are in the range of 250-350 Wh/kg, as compared to 100 Wh/g for Li-ion cells, the lower values being the result of specific features of the electrochemical processes for these systems during charge and discharge. Given that the practical specific energies of lithium batteries are typically 25-35% of the theoretical value, the optimum practical specific energy for a Li-S system would be around 780 Wh/g (30% theoretical). [V.S. Kolosnitsyn, E. Karaseva, US Patent Application 2008/0100624 A1]

The lithium-sulfur chemistry offers a number of technical challenges that have hindered the development of these electrochemical cells, particularly poor discharge-charge cyclability. Nonetheless, because of the inherent low weight, low cost, high power capacity of the lithium-sulfur cell, great interest exists in improving the performance of the lithium-sulfur system and extensive work has been performed in the last 20 years by many researchers all over the world to address these issues. [C. Liang, *et al.* in *Handbook of Battery Materials 2nd Ed.*, Chapter 14, pp. 811-840 (2011); V.S. Kolosnitsyn, *et al.*, *J. Power Sources* **2011**, 196, 1478-82; and references therein.]

A cell design for a lithium-sulfur system typically includes:

- An anode consisting of lithium metal, lithium-alloy or lithium-containing composite materials.
 - A non-reactive but porous separator between the anode and cathode (often polypropylene or γ -alumina). The presence of this separator results in separate anolyte and catholyte compartments.
 - A porous sulfur-bearing cathode that incorporates a binder (often polyvinylidene difluoride) and a conductivity-enhancing material (often graphite, mesoporous graphite, multiwall carbon nanotubes, graphene),
 - An electrolyte consisting of a polar aprotic solvent and one or more conductive Li salts [$(\text{CF}_3\text{SO}_2)_2\text{N}^-$, CF_3SO_3^- , CH_3SO_3^- , ClO_4^- , PF_6^- , AsF_6^- , halogens, etc.].
- The solvents used in these cells have included basic (cation-complexing) aprotic polar solvents such as sulfolane, dimethyl sulfoxide, dimethylacetamide, tetramethyl urea, *N*-methyl pyrrolidinone, tetraethyl sulfamide, tetrahydrofuran, methyl-THF, 1,3-dioxolane, diglyme, and tetraglyme. Lower polarity solvents are

not suitable due to poor conductivity and poor ability to solvate Li^+ species, and protic solvents can react with Li metal. In solid-state versions of the lithium-sulfur cell, the liquid solvents are replaced with a polymeric material such as polyethylene oxide.

- 5 • Current collectors and appropriate casing materials.

Summary of the Invention

Compositions and applications of organic polysulfides and organic polythiolates for use in metal-sulfur batteries, particularly lithium-sulfur batteries, are provided by the present invention. The organic polysulfide and organopolythiolate
10 species act to improve the performance of such electrochemical cells during repeated discharge and charge cycles.

The present invention thus relates to chemical sources of energy comprising a cell or battery with one or more positive electrodes (cathodes), one or more negative electrodes (anodes) and an electrolyte media, wherein the operative chemistry
15 involves reduction of sulfur or polysulfide species and oxidation of the reactive metal species. The negative electrode comprises a reactive metal such as lithium, sodium, potassium or alloys/composites of those metals with other materials. The positive electrode comprises sulfur, organic polysulfide species, and/or metal organic polysulfide salts, and matrices containing these species. The electrolyte matrices
20 comprise mixtures of organic solvent or polymers, inorganic or organic polysulfide species, carriers for the ionic form of the active metal, and other components intended to optimize electrochemical performance.

Specifically, this invention relates to the use of organic polysulfides, and their lithium (or sodium, quaternary ammonium or quaternary phosphonium)
25 organothiolate or organopolythiolate analogs, as components in the cathode and electrolyte matrices. Said organosulfur species chemically combine with sulfur and anionic mono- or polysulfide species to form organopolythiolate species which have increased affinity for the nonpolar sulfur components of the positive cathode and catholyte phase.

30 One aspect of the invention provides a battery, the battery comprising:
a) an anode comprising an anode active material comprising sodium, lithium or an alloy or composite of at least one of sodium or lithium with at least one other metal for providing ions;

- b) a cathode comprising a cathode active material comprising elemental sulfur, elemental selenium or a mixture of elemental chalcogens; and
- c) an intermediate separator element positioned between the anode and cathode acting to separate liquid or gel electrolyte solutions in contact with the anode and cathode, through which metal ions and their counterions move between the anode and cathode during charge and discharge cycles of the battery;

wherein the liquid or gel electrolyte solutions comprise a nonaqueous polar aprotic solvent or polymer and a conductive salt and at least one of conditions (i), (ii) or (iii) are met:

- (i) at least one of the liquid or gel electrolyte solutions additionally comprise at least one organosulfur species;
- (ii) the cathode is additionally comprised of at least one organosulfur species;
- (iii) the intermediate separator element comprises a functionalized porous polymer containing at least one organosulfur species;

wherein the organosulfur species comprises at least one organic moiety and at least one $-S-S_n-$ linkage, with n being an integer of 1 or more.

In one embodiment, just one of conditions (i), (ii) or (iii) is met. In another embodiment, all three conditions are met. In still another embodiment, only two of the conditions are met, e.g., (i) and (ii), (i) and (iii), or (ii) and (iii).

In another aspect, the invention provides an electrolyte comprising at least one nonaqueous polar aprotic solvent or polymer, at least one conductive salt, and at least one organosulfur species comprised of at least one organic moiety and at least one $-S-S_n-$ linkage wherein n is an integer of 1 or more.

Another aspect of the invention provides a cathode comprising a) elemental sulfur, elemental selenium or a mixture of elemental chalcogens, b) at least one electrically conductive additive, c) and at least one organosulfur species comprising at least one organic moiety and at least one $-S-S_n-$ linkage, n being an integer of 1 or more.

The organosulfur species, for example, may be selected from the group consisting of organic polysulfides and/or metal organic polythiolates. In certain embodiments of the invention, the organosulfur species contains one or more sulfur-containing functional groups selected from the group consisting of dithioacetal,

dithioketal, trithio-orthocarbonate, thiosulfonate $[-S(O)_2-S-]$, thiosulfinate $[-S(O)-S-]$, thiocarboxylate $[-C(O)-S-]$, dithiocarboxylate $[-C(S)-S-]$, thiophosphate, thiophosphonate, monothiocarbonate, dithiocarbonate, and trithiocarbonate. In other embodiments, the organosulfur species may be selected from the group consisting of aromatic polysulfides, polyether-polysulfides, polysulfide-acid salts and mixtures thereof.

Brief Description of the Drawings

Figure 1 shows discharge profiles of lithium-sulfur battery with n-C₁₂H₂₅SLi added to the cathode for repeated charge/discharge cycles 3 to 63.

10 Detailed Description of the Invention

An electroactive material that has been fabricated into a structure for use in a battery is referred to as an electrode. Of a pair of electrodes used in a battery, which serves as a chemical source of electrical energy, the electrode on the side having a higher electrochemical potential is referred to as the positive electrode, or the cathode, while the electrode on the side having a lower electrochemical potential is referred to as the negative electrode, or the anode. As used herein, the conventional nomenclature for batteries is employed wherein the terms "cathode" or "positive electrode" and "anode" or "negative electrode" refer to the electrochemical functions of the electrodes during discharge of the cell to provide electrical energy. During the charging portion of the cycle, the actual electrochemical functions of an electrode are reversed versus that which occurs during discharge, but the designation of the respective electrodes remains the same as for discharge.

Electrochemical cells are commonly combined in series, the aggregate of such cells being referred to as a battery. Based on the operative chemistry of the cells, primary batteries are designed for a single discharge to provide power for an external device. Secondary batteries are rechargeable, using electrical energy from an external source, and thus offer extended use over multiple discharge and charge cycles.

An electrochemically active material used in the cathode or positive electrode is referred to hereinafter as a cathode active material. An electrochemically active material used in the anode or negative electrode is hereinafter referred to as an anode active material. Multi-component compositions possessing electrochemical activity and comprising an electrochemically active material and optional electrically

conductive additive and binder, as well as other optional additives, are referred to hereinafter as electrode compositions. A battery comprising a cathode with the cathode active material in an oxidized state and an anode with the anode active material in a reduced state is referred to as being in a charged state. Accordingly,
5 battery comprising a cathode with the cathode active material in a reduced state, and an anode with the anode active material in an oxidized state, is referred to as being in a discharged state.

Without wishing to be bound by theory, the following are certain possible advantages or features of the present invention. The organosulfur species may
10 partition to the sulfur-rich catholyte phase. The chemical exchange reactions between dianionic sulfides or polysulfides (e.g., Li_2S_x , $x = 1, 2, 3, \dots$) and the organopolysulfides or organopolythiolates (e.g., $\text{R-S}_x\text{-R'}$ or $\text{R-S}_x\text{-Li}$, R and R' = organic moieties), along with sulfur extrusion/reinsertion chemistries common to polysulfides and polythiolates, favor minimizing the amount of the dianionic
15 polysulfides in the catholyte and favor redeposition of sulfur and sulfur-containing species at the cathode. The net removal of the dianionic polysulfides would reduce the electrolyte viscosity and thus minimize the deleterious effects of high viscosity on electrolyte conductivity. The organosulfur species may also increase the dissolution, and thus scavenging, of insoluble low-rank lithium sulfide species (particularly Li_2S and Li_2S_2) in both the catholyte and anolyte phases, thus minimizing loss of reactive
20 lithium species upon repeated charge/discharge cycles. The performance of the organosulfur species can be "tuned" by selection of the organic functionality. For example, short chain alkyl or alkyl groups with more polar functionality, would partition more to the anolyte phase, while the longer-chain or less-polar analogs
25 would partition more to the catholyte phase. Adjusting the relative ratios of the long/nonpolar and short/polar chain organic species would provide a means of controlling the partition of sulfur-containing species to the cathode/catholyte. Moreover, since the presence of some amount of polysulfide or polythiolate in the anolyte is advantageous as a means of controlling lithium dendrite growth on the
30 anode during charging, selection of appropriate organic moieties and their relative ratios would provide greater control of dendrite growth.

Organosulfur species useful in the present invention comprise at least one organic moiety and at least one $-\text{S-S}_n-$ linkage, wherein n is an integer of at least 1. In one embodiment, the organosulfur species comprises two organic moieties per

molecule (which may be the same as or different from each other) which are linked by a $-S-S_n-$ (polysulfide) linkage (wherein n is an integer of 1 or more). The $-S-S_n-$ linkage may form part of a larger linking group such as a $-Y^1-C(Y^2Y^3)-S-S_n-$ linkage or a $-Y^1-C(=Y^4)-S-S_n-$ linkage, wherein Y^1 is O or S, Y^2 and Y^3 are independently an organic moiety or $-S-S_o-Z$, where o is 1 or more and Z is an organic moiety or a species selected from Li, Na, quaternary ammonium, or quaternary phosphonium, and Y^4 is O or S. In another embodiment, the organosulfur species contains a monovalent organic moiety and a species selected from Na, Li, quaternary ammonium and quaternary phosphonium which are linked by a $-S-S_n-$ linkage (including, for example, a $-Y^1-C(Y^2Y^3)-S-S_n-$ linkage or $-Y^1-C(=Y^4)-S-S_n-$ linkage). In still another embodiment, a $-S-S_n-$ linkage may appear on either side of an organic moiety. For example, the organic moiety can be a divalent, optionally substituted aromatic moiety, $C(R^3)_2$ (with each R^3 being independently H or an organic moiety such as a C_1-C_{20} organic moiety), carbonyl ($C=O$) or thiocarbonyl ($C=S$).

The organosulfur species may, for example, be selected from the group consisting of organic polysulfides, organic polythiolates, including those with sulfur-containing functional groups such as dithioacetal, dithioketal, trithio-orthocarbonate, aromatic polysulfide, polyether-polysulfide, polysulfide-acid salt, thiosulfonate $[-S(O)_2-S-]$, thiosulfinate $[-S(O)-S-]$, thiocarboxylate $[-C(O)-S-]$, dithiocarboxylate $[-RC(S)-S-]$, thiophosphate or thiophosphonate functionality, or mono-, di- or trithiocarbonate functionality; organo-metal polysulfides containing these or similar functionalities; and mixtures thereof.


Suitable organic moieties include, for example, mono-, di- and polyvalent organic moieties which may comprise branched, linear and/or cyclic hydrocarbyl groups. As used herein, the term "organic moiety" includes a moiety which may, in addition to carbon and hydrogen, comprise one or more heteroatoms such as oxygen, nitrogen, sulfur, halogen, phosphorus, selenium, silicon, a metal such as tin and the like. The heteroatom(s) may be present in the organic moiety in the form of a functional group. Thus, hydrocarbyl as well as functionalized hydrocarbyl groups are considered within the context of the present invention to be organic moieties. In one embodiment, the organic moiety is a C_1-C_{20} organic moiety. In another embodiment, the organic moiety contains two or more carbon atoms. The organic moiety thus may be a C_2-C_{20} organic moiety.

The organosulfur species may be monomeric, oligomeric or polymeric in character. For example, the $-S-S_n-$ functionality may be pendant to the backbone of an oligomeric or polymeric species containing two or more repeating units of monomer in its backbone. The $-S-S_n-$ functionality may be incorporated into the backbone of such an oligomer or polymer, such that the oligomer or polymer backbone contains a plurality of $-S-S_n-$ linkages.


The organosulfur species may, for instance, be an organic polysulfide or mixture of organic polysulfides of formula $R^1-S-S_n-R^2$, wherein R^1 and R^2 independently represent a C_1-C_{20} organic moiety and n is an integer of 1 or more. The C_1-C_{20} organic moiety may be a monovalent branched, linear or cyclic hydrocarbyl group. R^1 and R^2 may each independently be a C_9-C_{14} hydrocarbyl group, with $n = 1$ (providing a disulfide, such as tertiary-dodecyl disulfide). In another embodiment, R^1 and R^2 are each independently a C_9-C_{14} hydrocarbyl group, with $n = 2-5$ (providing a polysulfide). Examples of such compounds include TPS-32 and TPS-20, sold by Arkema. In another embodiment, R^1 and R^2 are independently C_7-C_{11} hydrocarbyl groups, with $n = 2-5$. TPS-37LS, sold by Arkema, is an example of a suitable polysulfide of this type. Another type of suitable polysulfide would be a polysulfide or mixture of polysulfides wherein R^1 and R^2 are both tert-butyl and $n = 2-5$. Examples of such organosulfur compounds include TPS-44 and TPS-54, sold by Arkema.

The organosulfur species could also be an organic polythiolate of formula R^1-S-S_n-M , wherein R^1 is a C_1-C_{20} organic moiety, M is lithium, sodium, quaternary ammonium, or quaternary phosphonium and n is an integer of 1 or more.


In another embodiment, the organosulfur species may be a dithioacetal or dithioketal such as those corresponding to formulas (I) and (II), or a trithio-orthocarboxylate of formula (III):



I



II







III

wherein each R^3 is independently H or a C_1-C_{20} organic moiety, o , p and q are each independently an integer of 1 or more, and each Z is independently a C_1-C_{20} organic moiety, Li, Na, quaternary ammonium, or quaternary phosphonium. Examples of




such organosulfur species include 1,2,4,5-tetrathiane (formula I, $R^3 = H$, $o = p = 1$), tetramethyl-1,2,4,5-tetrathiane (formula I, $R^3 = CH_3$, $o = p = 1$), and oligo or polymeric species thereof.

- Another embodiment of the invention utilizes an organosulfur species which is
 5 an aromatic polysulfide of formula (IV), a polyether-polysulfide of formula (V), a polysulfide-acid salt of formula (VI), or a polysulfide-acid salt of formula (VII):

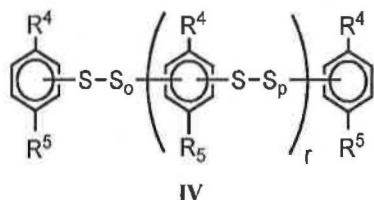

- wherein R^4 independently is tert-butyl or tert-amyl, R^5 independently is OH, OLi or
 10 ONa, and r is 0 or more (e.g., 0-10) in formula (IV) with the aromatic rings being optionally substituted in one or more other positions with substituents other than hydrogen, R^6 is a divalent organic moiety in formula (VI), R^7 is a divalent organic moiety in formula (VII), each Z is independently a C_1 - C_{20} organic moiety, Li, Na, quaternary ammonium or quaternary phosphonium, and o and p are each
 15 independently an integer of 1 or more. Examples of such organosulfur species include the aromatic polysulfides sold by Arkema under the brand name Vultac[®] (formula IV, $R^4 =$ tert-butyl or tert-amyl, $R^5 = OH$); and polysulfide-acid salts corresponding to formulas VI and VII derived from mercapto-acids such as mercaptoacetic acid, mercaptopropionic acid, mercaptoethanesulfonic acid,
 20 mercaptopropenesulfonic acid, or from olefin-containing acids such as vinylsulfonic acid or 2-acrylamido-2-methylpropanesulfonic acid.

- In still another embodiment, the organosulfur species is an organo- or organo-metal polysulfide containing trithiocarbonate functionality of formula (IX), an organo- or organo-metal polysulfide containing dithiocarbonate functionality of
 25 formula (X), or an organo- or organo-metal polysulfide containing monothiocarbonate functionality of formula (XI):



wherein Z is a C_1 - C_{20} organic moiety, Na, Li, quaternary ammonium, or quaternary phosphonium, and o and p are independently an integer of 1 or more.

The liquid or gel electrolyte solution may be additionally comprised of a dimetal polythiolate species of formula $M-S-S_n-M$, wherein each M is independently Li, Na, quaternary ammonium, or quaternary phosphonium and n is an integer of 1 or more. Such a species thus does not contain any organic moiety, unlike the above-
5 described organosulfur species.

The intermediate separator element may function as a divider between compartments in an electrochemical cell. One compartment may comprise an electrolyte in contact with a cathode (the electrolyte in such compartment may be referred to as a catholyte). Another compartment may comprise an electrolyte in
10 contact with an anode (the electrolyte in such compartment may be referred to as an anolyte). The anolyte and the catholyte may be the same as, or different from, each other. One or both of the anolyte and the catholyte may contain one or more organosulfur species in accordance with the present invention. The intermediate separator element may be positioned between such compartments in a manner so as to
15 permit ions from the anolyte to pass through the intermediate separator element into the catholyte and vice versa, depending upon whether the electrochemical cell is being operated in the charge or discharge mode.

In a further embodiment of the invention, the intermediate separator element is comprised of a porous polymer. The porous polymer may, for example, be comprised
20 of polypropylene, polyethylene, or a fluorinated polymer. The porous polymer may be functionalized with an organosulfur species of the type described herein. The organosulfur species may be pendant to the backbone of the porous polymer, may be present in crosslinks between the backbones of individual polymer chains and/or may be incorporated into the backbone of the porous backbone. Thus, the backbone of the
25 porous polymer may contain one or more $-S-S_n-$ linkages and/or $-S-S_n-$ linkages may be pendant to the polymer backbone. Such $-S-S_n-$ linkages may also be present in crosslinks.

Suitable solvents to be used in electrochemical cells in accordance with the invention include any of the basic (cation-complexing) aprotic polar solvents known
30 or used for lithium-sulfur batteries generally such as sulfolane, dimethyl sulfoxide, dimethylacetamide, tetramethyl urea, N-methyl pyrrolidinone, tetraethyl sulfamide; ethers such as tetrahydrofuran, methyl-THF, 1,3-dioxolane, diglyme, and tetraglyme, and mixtures thereof; carbonates such as ethylene carbonate, propylene carbonate, dimethylcarbonate, diethylcarbonate, ethylmethylcarbonate, methylpropylcarbonate,

ethylpropylcarbonate and the like; as well as esters such as methylacetate, ethyl acetate, propylacetate, and gamma-butyrolactone. The electrolyte may comprise a single such solvent or a mixture of such solvents. Any of the polar aprotic polymers known in the battery art could also be employed. The electrolyte may comprise a
5 polymeric material and may take the form of a gel. Suitable polymers for use in the electrolyte may include, for example, polyethylene oxide, a polyethersulfone, a polyvinylalcohol, or a polyimide. The electrolyte may be in the form of a gel, which may be a three-dimensional network comprised of a liquid and a binder component. The liquid may be a monomeric solvent which is entrained within a polymer, such as
10 a crosslinked polymer.

One or more conductive salts are present in the electrolyte in combination with the nonaqueous polar aprotic solvent and/or polymer. Conductive salts are well known in the battery art and include, for example, lithium salts of $(\text{CF}_3\text{SO}_2)_2\text{N}^-$, CF_3SO_3^- , CH_3SO_3^- , ClO_4^- , PF_6^- , AsF_6^- , halogen or the like. Sodium and other
15 alkali metal salts and mixtures thereof may also be used.

The anode active material may comprise an alkali metal such as lithium or sodium or another active material or composition. Particularly preferred anode active materials include metallic lithium, alloys of lithium, metallic sodium, alloys of sodium, alkali metals or alloys thereof, metal powders, alloys of lithium and
20 aluminum, magnesium, silicon, and/or tin, alkali metal-carbon and alkali metal-graphite intercalates, compounds capable of reversibly oxidizing and reducing with an alkali metal ion, and mixtures thereof. The metal or metal alloy (e.g., metallic lithium) may be contained as one film within a battery or as several films, optionally separated by a ceramic material. Suitable ceramic materials include, for example,
25 silica, alumina, or lithium-containing glassy materials such as lithium phosphates, lithium aluminates, lithium silicates, lithium phosphorus oxynitrides, lithium tantalum oxide, lithium aluminosilicates, lithium titanium oxides, lithium silicosulfides, lithium germanosulfides, lithium aluminosulfides, lithium borosulfides, lithium phosphosulfides and mixtures thereof.

30 The cathode comprises elemental sulfur, elemental selenium or a mixture of elemental chalcogens. In one embodiment, the cathode is additionally comprised of one or more organosulfur species in accordance with those previously described in detail herein. The cathode may additionally and/or alternatively be comprised of a binder and/or an electrically conductive additive. Suitable binders include polymers

such as, for example, polyvinyl alcohol, polyacrylonitrile, polyvinylidene fluoride (PVDF), polyvinyl fluoride, polytetrafluoroethylene (PTFE), copolymers from tetrafluoroethylene and hexafluoropropylene, copolymers from vinylidene fluoride and hexafluoropropylene, copolymers from vinylidene fluoride and
5 tetrafluoroethylene, ethylene-propylene-diene monomer rubber (EPDM), and polyvinyl chloride (PVC). The electrically conductive additive may be, for example, a carbon in electrically conductive form such as graphite, graphene, carbon fibers, carbon nanotubes, carbon black, or soot (e.g., lamp or furnace soot). The cathode may be present in a battery or electrochemical cell in combination with a current
10 collector, such as any of the current collectors known in the battery or electrochemical cell art. For example, the cathode may be coated on the surface of a metallic current collector.

EXAMPLES

15

Cathode Fabrication, Battery Preparation, and Battery Testing

Example 1

A positive electrode comprising 70 wt% sublimed elemental sulfur powder, 20 wt%
20 polyethylene oxide (PEO, MW 4×10^6), 10 wt% carbon black (Super P[®] Conductive, Alfa Aesar) was produced by the following procedure:

The mixture of these components in *N*-methyl-2-pyrrolidone (NMP) was mechanically ground in a planetary milling machine. Acetonitrile was added to dilute
25 the mixture. The resulting suspension was applied onto aluminum foil (76 μ m thickness) with an automatic film coater (Mathis). The coating was dried at 50 °C in a vacuum oven for 18 hrs. The resulting coating contained 3.10 mg/cm² cathode mixture.

30 Example 2

A positive cathode containing lithium n-dodecyl mercaptide (10 wt% of sulfur) was prepared following the procedure described in Example 1. The resulting coating contained 3.4 mg sulfur/cm²

Example 3

The positive cathode from Example 2 was used in a PTFE Swagelok cell with two stainless steel rods or coin cell assembly made of stainless steel (CR2032). The battery cell was assembled in an argon filled glove box (MBraun) as follows: the cathode electrode was placed on the bottom can followed by the separator. Then electrolyte was added to the separator. A lithium electrode was placed onto of the separator. A spacer and a spring were placed on top of the lithium electrode. The battery core was sealed with the stainless steel rods or with a crimping machine.

Example 4

Following the procedure described in Example 3, a battery cell consisting of cathode from Example 2 (7/16" diameter), 20 μ L of 0.5 M LiTFSI solution in tetraethylene glycol dimethyl ether (TEGDME):1,3-dioxolane (DOL)=1:1, separator, and lithium electrode (thickness 0.38 mm, diameter 7/16") was tested for charge-discharge cycling at a current of 0.1 mA. The testing was carried out using Gamry potentiometer (Gamry Instruments) to cut-off voltage of 1.5 V and 3.2 V at room temperature. The discharge cycle profile is illustrated in Figure 1.

Syntheses of lithium alkylmercaptides

Example 5 - Synthesis of lithium n-dodecyl mercaptide with hexyl lithium


To n-dodecyl mercaptan (9.98 g, 1 eq.) in hexanes (100 mL) at -30 °C was added n-hexyllithium (33 wt% in hexane, 1.1 eq.) dropwise to maintain mixture temperature below -20 °C. The solvent was removed under reduced pressure to yield a white solid at quantitative yield.

Example 6 - Synthesis of lithium n-dodecyl mercaptide with lithium hydroxide

A mixture of n-dodecyl mercaptan (2.0 g, 1 eq.) and lithium hydroxide monohydrate (0.41 g, 1 eq.) in acetonitrile (8 mL) was heated to 75 °C and stirred at 75 °C for 16 hrs. After cooling to room temperature, the reaction mixture was filtered. The filter

cake was rinsed with acetonitrile and dried at 50 °C in a vacuum oven over night. The lithium n-dodecylmercaptide was obtained as a white solid in 93.5% yield (1.93 g)

Example 7 - Synthesis of lithium n-dodecyl mercaptide with hexyl lithium




Following the procedure described in Example 6, 3,6-dioxaoctane-1,8-dithiol di-lithium salt was synthesized from the di-mercaptan as a white solid in quantitative yield.

10

Syntheses of lithium alkyl polythiolates


Example 8 - Synthesis of lithium n-dodecylpolythiolate with lithium hydroxide



To a nitrogen degassed solution of n-dodecyl mercaptan (2.00 g, 1 eq.) in 1,3-dioxolane (25 mL) was added lithium hydroxide monohydrate (0.41 g, 1 eq.) and sulfur (1.27 g, 4 eq.). The mixture was stirred under nitrogen at room temperature for 30 min. Lithium n-dodecyl polythiolate in 1,3-dioxolane was obtained as a dark red solution. Complete conversion of mercaptan to lithium n-dodecyl polythiolate was confirmed by ¹³C-NMR and LCMS.

20

Example 9 - Synthesis of lithium 3,6-dioxaoctane-1,8-polythiolate with lithium hydroxide and sulfur



25

Following the procedure described in Example 8, dark red solution of lithium 3,6-dioxaoctane-1,8-polythiolate in 1,3-dioxolane from reaction of 3,6-dioxaoctane-1,8-dithiol (0.72 g, 1 eq.), lithium hydroxide monohydrate (0.33 g, 2 eq.), and sulfur (1.02 g, 8 eq.) in 1,3-dioxolane (10 mL).

30

Example 10 - Synthesis of lithium n-dodecylpolythiolate from the lithium alkyl mercaptide

To a nitrogen degassed slurry of lithium n-dodecyl mercaptide (0.21 g, 1 eq.) in 1,3-dioxolane (5 mL) was added sulfur (0.13 g, 4 eq.). The mixture was stirred under nitrogen at room temperature for 16 hrs. Insoluble solids were removed by filtration.

- 5 The dark red filtrate contained 63% of lithium n-dodecyl polythiolates and 37% of a mixture of bis(n-dodecyl)polysulfides as determined by LCMS.

Example 11 - Synthesis of lithium n-dodecylpolythiolate with lithium metal and sulfur

10

To a nitrogen degassed solution of n-dodecyl mercaptan (2.23 g, 1 eq.) in 1,3-dioxolane (25 mL) was added sulfur (1.41 g, 4 eq.), and lithium (76.5 mg). The mixture was heated to 60 °C and stirred under nitrogen at 60 °C for 1 hr. Lithium n-dodecyl polythiolate in 1,3-dioxolane was obtained as a dark red solution. Complete

15 conversion of n-dodecyl mercaptan was confirmed by ¹³C-NMR.

Example 12 – Synthesis of lithium 3,6-dioxaoctane-1,8-polythiolate with lithium metal and sulfur

- 20 Following the procedure in Example 11, a dark red solution of lithium 3,6-dioxaoctane-1,8-polythiolate in 1,3-dioxolane was obtained by reaction of 3,6-dioxaoctane-1,8-dithiol (1.97 g, 1 eq.), lithium metal (0.15 g, 2 eq.), and sulfur (2.77 g, 8 eq.) in 1,3-dioxolane (11 mL). Complete conversion of starting di-mercaptan was confirmed by ¹³C-NMR

25

Example 13 – Dissolution of Li₂S by added lithium n-dodecylpolythiolate

To determine the solubility of lithium sulfide in electrolyte with lithium n-dodecylpolythiolate, a saturated solution of lithium sulfide was prepared as follows:

- 30 A 0.4 M solution of lithium n-dodecylpolythiolate in 1,3-dioxolane was prepared following procedures described in Example 10. The solution was then diluted to 0.2 M with tetraethylene glycol dimethylether, then added to 1M LiTFSI solution in 1:1 tetraethylene glycol dimethylether:1,3-dioxolane at 1:1 = v/v. To the resulting solution, lithium sulfide was added until a saturated mixture was obtained. The


mixture was then filtered and the filtrate was analyzed for dissolved lithium by ICP-MS (Agilent 7700x ICP-MS). The solubility of lithium sulfide was calculated based on the lithium level. In 0.5 M LiTFSI with 0.1 M lithium n-dodecylpolythiolate in 1:1 tetraethylene glycol dimethylether:1,3-dioxolane, solubility of lithium sulfide was
5 determined to be 0.33 wt%. In contrast, without lithium n-dodecylpolythiolate, the solubility of lithium sulfide in 0.5 M LiTFSI was only 0.13 wt%. This clearly demonstrated the improved solubility of Li_2S in the electrolyte matrix of the battery when the organosulfurs of this invention are present.

What is claimed is:


1. A battery, comprising:
 - a) an anode comprising an anode active material comprising sodium, lithium or an alloy or composite of at least one of sodium or lithium with at least one other metal for providing ions;
 - b) a cathode comprising a cathode active material comprising elemental sulfur, elemental selenium or a mixture of elemental chalcogens; and
 - c) an intermediate separator element positioned between the anode and cathode acting to separate liquid or gel electrolyte solutions in contact with the anode and cathode, through which metal ions and their counterions move between the anode and cathode during charge and discharge cycles of the battery;wherein the liquid or gel electrolyte solutions comprise a nonaqueous polar aprotic solvent or polymer and a conductive salt and at least one of conditions (i), (ii) or (iii) are met:
 - (i) at least one of the liquid or gel electrolyte solutions additionally comprise at least one organosulfur species;
 - (ii) the cathode is additionally comprised of at least one organosulfur species;
 - (iii) the intermediate separator element comprises a functionalized porous polymer containing at least one organosulfur species;wherein the organosulfur species comprises at least one organic moiety and at least one $-S-S_n-$ linkage, n being an integer of 1 or more.
2. The battery of claim 1, wherein the organosulfur species is selected from the group consisting of organic polysulfides and organic polythiolates and mixtures thereof.
3. The battery of claim 1, wherein the organosulfur species contains one or more sulfur-containing functional groups selected from the group consisting of dithioacetal, dithioacetal, trithio-orthocarbonate, thiosulfonate $[-S(O)_2-S-]$, thiosulfinate $[-S(O)-S-]$, thiocarboxylate $[-C(O)-S-]$, dithiocarboxylate $[-C(S)-$

S-], thiophosphate, thiophosphonate, monothiocarbonate, dithiocarbonate, and trithiocarbonate.


4. The battery of claim 1, wherein the organosulfur species is selected from the group consisting of aromatic polysulfides, polyether-polysulfides, polysulfide-acid salts and mixtures thereof.
5. The battery of claim 1, wherein the organosulfur species is an organic polysulfide of formula $R^1-S-S_n-R^2$, wherein R^1 and R^2 independently represent a C_1 - C_{20} organic moiety that may be linear, branched, or cyclic aliphatic or aromatic and that may optionally comprise one or more functional groups containing N, O, P, S, Se, Si, Sn, halogen and/or metal, and n is an integer of 1 or more.
6. The battery of claim 1, wherein the organosulfur species is an organic thiolate of formula R^1-S-M or organic polythiolate of formula R^1-S-S_n-M , wherein R^1 is a C_1 - C_{20} organic moiety that may be linear, branched, or cyclic aliphatic or aromatic and that may optionally comprise one or more functional groups containing N, O, P, S, Se, Si, Sn, halogen and/or metal, M is lithium, sodium, quaternary ammonium, or quaternary phosphonium, and n is an integer of 1 or more.
7. The battery of claim 1, wherein the organosulfur species is a dithioacetal or dithioacetal of formulas (I) or (II), or a trithio-orthocarboxylate of formula (III):



I



II







III

wherein each R^3 is independently H or a C_1 - C_{20} organic moiety that may be linear, branched, or cyclic aliphatic or aromatic and that may optionally comprise one or more functional groups containing N, O, P, S, Se, Si, Sn, halogen and/or metal, o, p and q are each independently an integer of 1 or more, and each Z is independently: a C_1 - C_{20} organic moiety that may be




linear, branched, or cyclic aliphatic or aromatic and that may optionally comprise one or more functional groups containing N, O, P, S, Se, Si, Sn, halogen and/or metal; Li; Na; quaternary ammonium; or quaternary phosphonium.

8. The battery of claim 1, wherein the organosulfur species is an aromatic polysulfide of formula (IV), a polyether-polysulfide of formula (V), a polysulfide-acid salt of formula (VI), or a polysulfide-acid salt of formula (VII):

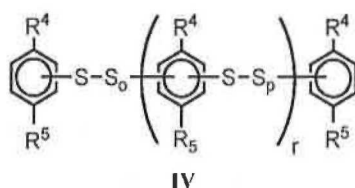

wherein R^4 independently is tert-butyl or tert-amyl, R^5 independently is OH, OLi or ONa, and r is 0 or more in formula (IV) with the aromatic rings being optionally substituted in one or more positions with substituents other than hydrogen, R^6 is a divalent organic moiety in formula (VI), R^7 is a divalent organic moiety in formula (VII), each Z is independently a $\text{C}_1\text{-C}_{20}$ organic moiety, Li, Na or quaternary ammonium, and o and p are each independently an integer of 1 or more.

9. The battery of claim 1, wherein the organosulfur species is an organo- or organo-metal polysulfide containing trithiocarbonate functionality of formula (IX), an organo- or organo-metal polysulfide containing dithiocarbonate functionality of formula (X), or an organo- or organo-metal polysulfide containing monothiocarbonate functionality of formula (XI):



wherein Z is a $\text{C}_1\text{-C}_{20}$ organic moiety, Na, Li, quaternary ammonium or quaternary phosphonium, and o and p are each independently an integer of 1 or more.

10. The battery of claim 1, wherein the liquid or gel electrolyte solution is additionally comprised of a dimetal polythiolate species of formula $M-S-S_n-M$, wherein each M is independently Li, Na, quaternary ammonium, or quaternary phosphonium, and n is an integer of 1 or more.
11. The battery of claim 1, wherein the cathode is additionally comprised of at least one electrically conductive additive and/or at least one binder.
12. The battery of claim 1, wherein the organosulfur species is pendant to the backbone of the functionalized porous polymer.
13. The battery of claim 1, wherein the organosulfur species is crosslinked into or forms part of the backbone of the functionalized porous polymer.
14. The battery of claim 1, wherein the organic moiety contains at least two carbon atoms.
15. The battery of claim 1, wherein the intermediate porous separator separates the battery to provide an anolyte section associated with the anode and a catholyte section associated with the cathode and wherein the organosulfur species is present in at least one of the anolyte section or the catholyte section.
16. The battery of claim 1, wherein the non-aqueous polar aprotic solvent or polymer contains one or more functional groups selected from ether, carbonyl, ester, carbonate, amino, amido, sulfidyl [-S-], sulfinyl [-S(O)-], or sulfonyl [-SO₂-].
17. The battery of claim 1, wherein the conductive salt corresponds to formula MX wherein M is Li, Na or quaternary ammonium and X is (CF₃SO₂)₂N, CF₃SO₃, CH₃SO₃, ClO₄, PF₆, NO₃, AsF₆ or halogen.
18. The battery of claim 1, wherein the organic moiety is oligomeric or polymeric and the organosulfur species comprises at least one -S-S- linkage that is pendant to the backbone of the oligomeric or polymeric organic moiety.

19. The battery of claim 1, wherein the organic moiety is oligomeric or polymeric and the organosulfur species comprises at least one $-S-S-$ linkage that is incorporated into the backbone of the oligomeric or polymeric organic moiety.
20. An electrolyte, comprising at least one nonaqueous polar aprotic solvent or polymer, at least one conductive salt, and at least one organosulfur species comprised of at least one organic moiety and at least one $-S-S_n-$ linkage wherein n is an integer of 1 or more.
21. A cathode comprising a) elemental sulfur, elemental selenium or a mixture of elemental chalcogens, b) at least one electrically conductive additive, c) and at least one organosulfur species comprising at least one organic moiety and at least one $-S-S_n-$ linkage, n being an integer of 1 or more.
22. The cathode of claim 21, in combination with a current collector.
23. The cathode of claim 21, wherein the at least one electrode conductivity enhancing agent includes graphite, carbon nanotubes, carbon nanofibers, graphene, carbon black or soot.
24. The cathode of claim 21, additionally comprising at least one binder.