

This Sheet Has Been Replaced



✓ Description	: paged 1	to paged 10
✓ Claim(s)	: paged 11	to paged 17
✓ Drawing(s)	: paged 1/3	to paged 3/3
✓ Abstract	: paged 18	to paged -
DATE OF RECEIPT		
TITLE OF THE INVENTION		

7603165-3 IP05

EL-4322

CONNECTOR, CIRCUIT BOARD CONTACT ELEMENT
AND RETENTION PORTION

5

BACKGROUND OF THE INVENTION

1. Field of the Invention.

This invention relates to circuit board contact elements and retention sections thereof which are for mounting in holes in connector housings, specifically header housings.

2. Description of Related Art.

Electrical contacts, otherwise referred to as terminals, contact elements or pins, are used in the electronics industry in conjunction with printed circuit (PC) boards and panel boards for making electrical connections between, and among, circuits.

A plurality of the contacts are frequently mounted in an insulative connector housing with one end of contacts extending from the connector housing for making mechanical and electrical contact with a conductive path on the PC board. The other end of the contacts typically extend through holes in the connector housing for mechanical and electrical connection with contacts in a mating connector.

In a high pin count (HPC) header which is a commercially available male connector, contacts or wire pins having a 0.025 inch square cross section are staked in round holes in a plastic housing. Retention of the pins in the housing is achieved by an interference fit between corners of the square pin and the round hole in the housing. The pins are made from phosphor bronze and plated with gold over nickel under plating. The housing is made from polyetheremide resin. During the staking process, slivers of plated coatings are formed due to scraping on the pin corners. These slivers present a potential for electrical short. As such, these slivers are removed by brushing, blowing and/or washing operations at added cost.



It is an object of this invention to provide a retention portion of an electrical contact element that substantially does not produce slivers when staked in a hole through a connector housing.

5 Further, it is an object of this invention to provide a retention portion of an electrical contact element that substantially does not produce slivers when staked in a hole through a header housing.

10 Further, it is an object of this invention to provide a retention portion of an electrical contact element that substantially does not produce slivers when staked in a hole through a header housing made of a high temperature resin.

15 SUMMARY OF THE INVENTION

The invention is directed to a retention portion of an electrical contact element for mechanical connection in a hole through a connector housing comprising:

20 a plurality of opposed upsets of progressively different sizes,

whereby when the element is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion
25 while substantially preventing sliver formation.

The invention is further directed to an electrical contact element for mechanical connection in a hole through a connector housing comprising:

30 a force receiving end portion;

an insertion end portion; and

a retention section between the force receiving end portion and the insertion end portion, the retention section including a plurality of opposed upsets of progressively different sizes,

35 whereby when the insertion end portion is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole

during insertion while substantially preventing sliver formation.

The invention is further directed to an electrical connector comprising:

a housing having a plurality of hole arranged in rows and columns;

an electrical contact element for mechanical connection in each one of the holes, each one of the electrical contact elements comprising:

a force receiving end portion;

an insertion end portion; and

a retention section between the force receiving end portion and the insertion end portion, the retention section including a plurality of opposed upsets of progressively different sizes,

whereby when the insertion end portion is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion while substantially preventing sliver formation.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention can be more fully understood from the following detailed description thereof in connection with accompanying drawings which form a part of this application and in which:

Figure 1 is a front side view of an electrical contact element for mechanical connection in a hole through a connector housing in accordance with the present invention.

Figure 2 is a right side view of the electrical contact element of Figure 1 taken on the line 2-2 in the direction of the arrows.

Figure 3 is an enlarged front side view of a retention portion of the electrical contact element in circle 3 of Figure 1.

This Sheet Has Been Replaced





Figure 4 is an enlarged right side view of the retention portion of the electrical contact element in circle 4 of Figure 2.

5 Figure 5 is a cross sectional view of the electrical contact element of Figure 1 taken on the line 5-5 in the direction of the arrows.

10 Figure 6 is a schematic representation of a preferred embodiment of an oblong hole through a connector housing for receiving the electrical contact element of Figure 1.

Figure 7 a top side view of a header having a plurality of the electrical contact elements of the present invention staked in oblong holes through the header housing.

15 Figure 8 a right side view of the header of Figure 7 taken on the line 8-8 in the direction of the arrows.

20 Figure 9 a cross sectional view of the header of Figure 7 taken on the line 9-9 in the direction of the arrows.

DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

25 Throughout the following detailed description, similar reference characters refer to similar elements in all figures of the drawings.

Referring to Figure 1, there is illustrated a front side view of an electrical contact element 10 for mechanical connection in a hole through a connector housing in accordance with the present invention. Figure 2 is a
30 right side view of the electrical contact element 10 of Figure 1 taken on the line 2-2 in the direction of the arrows.

35 The electrical contact element 10 comprises a force receiving end portion 12, an insertion end portion 14 and a retention portion 16 between the force receiving end portion 12 and the insertion end portion 14. The electrical contact element 10 may optionally, but does not have to, have a compliant portion 18 for forcing into a

plated hole through a printed circuit board. The compliant portion 18 can be a press-fit section for creating an interference fit between the contact element 10 in a hole without the need for additional fastening means, such as, soldering. Illustrative press-fit sections that can be used for the compliant section 18 include those disclosed in U.S. Patent 4,274,699 or 4,728,164. Alternatively, the compliant portion 18 can be designed so as to require additional fastening means, such as, soldering. One such compliant section may be a star section.

The force receiving end portion 12 and the insertion end portion 14 preferably have a square cross section, except at distal ends 20. Further, the force receiving end portion 12 and the insertion end portion 14 may have square or rounded corners 22. Square corners 22 are illustrated in Figure 5 which discloses a cross sectional view of the electrical contact element 10 of Figure 1 taken on the line 5-5 in the direction of the arrows.

The force receiving end portion 12 and the insertion end portion 14, thus, comprise a first substantially flat side 24, a second substantially flat side 26, a third substantially flat side 28, and a fourth substantially flat side 30. The first side 24 and the third side 28 are substantially parallel to one another. The second side 26 and the fourth side 30 are substantially parallel to one another. The first side 24 and the third side 28 are substantially perpendicular to the second side 26 and the fourth side 30.

The electrical contact element 10 has a longitudinal axis 32. The element 10 is symmetric or substantially symmetric about the longitudinal axis 32. The element 10 has a first mid-plane that contains the longitudinal axis 32 and bisects the element 10 between the first side 24 and the third side 28. The first mid-plane is, thus, parallel to the first side 24 and the third side 28. The element 10 is symmetric or substantially symmetric about the first mid-plane. The element 10 has a second



mid-plane that contains the longitudinal axis 32 and bisects the element 10 between the second side 26 and the fourth side 30. The second mid-plane is, thus, parallel to the second side 26 and the fourth side 30. The element 10
5 is symmetric or substantially symmetric about the second mid-plane.

The distal ends 20 can be shaped like truncated pyramids having four inclined surfaces 34 which slope towards the longitudinal axis 32 of the electrical contact
10 element 10 and intersect or terminate at a substantially flat end surface 36.

The force receiving end portion 12 and/or the insertion end portion 14 of the electrical contact element 10 can have different lengths depending on their intended
15 uses. This is illustrated in Figure 1 by depicting alternate positions 20' and 20" of one of the force receiving end portion distal end 34.

Figure 3 is an enlarged front side view of the retention portion 16 of the electrical contact element 10
20 in circle 3 of Figure 1. Figure 4 is an enlarged right side view of the retention portion 16 of the electrical contact element 10 in circle 4 of Figure 2.

Referring in particular to Figure 3, the retention portion 16 comprises a plurality of opposed
25 upsets 40 of progressively different sizes. Multiple pairs of upsets 40 provide retention and stability of the element 10 in a housing. Preferably, the retention portion 16 has at least three pairs of the opposed upsets 40. The embodiment illustrated in the drawings has a first
30 insertion pair 42 of the opposed upsets 40, a second insertion pair 44 of the opposed upsets 40, a third insertion pair 46 of the opposed upsets 40, and a fourth insertion pair 48 of the opposed upsets 40. The first pair 42 is the closest to the insertion end portion 14. The
35 second pair 44 is the next or second closest to the insertion end portion 14. The third pair 46 is the third closest to the insertion end portion 14. The fourth pair 48 is the fourth closest to the insertion end portion 14.





The first pair 42 has a first distance between its distal tips 50 which is shorter than the distance between distal tips 50 of all the other pairs 44, 46, and 48 of the opposed upsets 40. The second pair 44 has a second distance between its distal tips 50 that is slightly longer than the first distance, but is shorter than the distance between distal tips 50 of the third pair 46 and fourth pair 48 of the opposed upsets 40. The third pair 46 has a third distance between its distal tips 50 that is slightly longer than the second distance, but is shorter than the distance between distal tips 50 of the fourth pair 48 of the opposed upsets 40. The fourth pair 48 has a fourth distance between its distal tips 50 that is slightly longer than the third distance. In other words, the distance between distal tips 50 of the upsets 40 in the pairs of upsets 40 incrementally increases from the insertion end portion 14 to the force receiving portion 12.

A central portion 52 of the first side 24 and the third side 28 extends between the upsets 40 in each of the pairs of upsets 40. Each one of the central portions 52 has two shoulders 54. The shoulders 54 are generally parallel to the second side 26 and the fourth side 30. Each shoulder 54 extends between one edge of the central portions 52 and one of the upsets 40.

Referring to Figures 3 and 4, each one of the upsets 40 preferably comprises a pair of bumps or projections 60. Each one of the bumps or projections 60 can be described as having a first surface 62, a second surface 64 and a third surface 66. Preferably, the first surfaces 62 and the second surfaces 64 are flat or substantially flat. Preferably, the third surfaces 66 are curved or dome-like.

The first surfaces 62 and the second surfaces 64 are connected perpendicular or substantially perpendicular to the shoulders 54. The first surfaces 62 are also connected to the second surfaces 64 and the third surfaces 66. The second surfaces 64 are connected to the first surfaces 62 and third surfaces 66. The third surfaces 66

connect the first surfaces 62 and the second surfaces 64 to either the second side 26 or the fourth side 30. In Figure 4, the third surfaces 66 are extending up from the second side 26 in a curved or dome-like fashion to meet with the upper edges of the first surfaces 62 and the second surfaces 64. Edges of the surfaces or intersections between the surfaces and the other surfaces, sides or shoulders can be rounded or angular.

An intermediate strip 70 of the second side 26 and the fourth side 30 can optionally extend between the pairs of projections 60. A lateral strip 72 of the second side 26 and the fourth side 30 can optionally extend between each pair of the projections 60. In the embodiment illustrated in Figures 3 and 4, the lateral strips 72 have faces 74 extending to the shoulders 54.

Each one of the first surfaces 62 of the four projections 60 in the first pair 42 of upsets 40 has a first edge that intersects with an edge portion 56 of the first side 24 and the third side 28. As seen in Figure 3, the first side 24 has two edge portions 56. Similarly, the third side 28 has two edge portions 56. Each one of the four first surfaces 62 of the upsets 40 in the first pair 42 incline or slope away from a respective one of the edge portions 56 towards, and at a first angle with respect to, the first mid-plane. Each one of the four first surfaces 62 of the upsets 40 in the first pair 42 have a second edge that intersects a first edge of the second surfaces 64.

Each one of the second surfaces 64 of the upsets 40 in the first pair 42 incline or slope away from the first surfaces 62 and the first mid-plane at a second angle with respect to the first mid-plane. Preferably, the second angle is less than the first angle. The second surfaces 64 may even be parallel to the first mid-plane. Each one of the second surfaces 64 of the upsets 40 in the first pair 42 intersects in a curved or rounded fashion one of the faces 74 of the lateral strips 72 between the first pair of projections 60 and the second pair of projections 60.

This Sheet Has Been Replaced





Each one of the four third surfaces 66 of the upsets 40 in the first pair 42 connect to distal edges of the first surfaces 62 and the second surfaces 64. Each one of the third surfaces 64 extends in a curved or globe-like fashion and intersects either the second side 26 or the fourth side 30 in a curved line.

The other projections 60 in the second, third and fourth pair of upsets 40 are configured like the aforesdescribed projections 60 in the first pair 42 of upsets 40. However, the first edge of the first surfaces 62 in the projections 60 in the second, third and fourth pair of upsets 40 intersect one of the faces 74, rather than the edge portion 56. Further, the second surfaces 64 of the projections 60 in the fourth pair 48 of upsets 40 connect to a ledge 58, rather than the face 74. There are four ledges 58. Each one of the ledges 58 is defined by one of the the second surfaces 64 of the projections 60 in the fourth pair 48 of upsets 40, one of the four shoulders 54, either the first side 24 or the third side 28, and either the second side 26 or the fourth side 30.

The opposed upsets 40 are made by squeezing or pinching the edge portions 56 of the first side 24 and the third side 28 towards one another.

The contact elements 10 of the present invention can be made from any suitable metal used for electrical terminals, such as brass, phosphor bronze, beryllium copper and the like. The contact elements 10 may be plated or coated with one or more conductive layer, such as tin, nickel, pladium, gold, silver or a suitable alloy.

The retention portion 16 is for staking in and mechanical connection to a hole 80 through a connector housing. Figure 6 is a schematic representation of a preferred embodiment of a substantially oblong hole 80 through a connector housing for receiving the electrical contact element of Figure 1. The substantially oblong hole 80 has two opposed flat and parallel walls 82. The flat walls 82 are connected by cylindrical or curved walls 84 which can be parts of a same cylinder 86. Preferably, only

the retention portion 16 contacts the hole wall(s) 82, 84 in the housing. This is accomplished by inserting the element 10 into the substantially oblong hole 80 such that only the upsets 40 contact the flat walls 82 in the hole geometry depicted in Figure 6. This provides clearance between the element 10 and the housing which avoids scraping corners 22 of the element 10 on the housing and eliminates or significantly reduces sliver formation. This hole geometry is also better for injection molding of the housing than round or square holes.

Figure 7 a top side view of a connector housing and, specifically, a header housing for receiving a plurality of the electrical contact elements 10 of the present invention staked in oblong holes 80 through the header housing 90. Figure 8 a right side view of a connector and, more specifically, a header 100 comprising a plurality of the electrical contact elements 10 of Figure 1 in the header housing 90 of Figure 7 taken on the line 8-8 in the direction of the arrows. In Figure 8, a portion of the housing 90 has been broken away to clearly show columns of the insertion end portions 14 of the electrical contact elements 10. Figure 9 a cross sectional view of the header housing 90 of Figure 7 taken on the line 9-9 in the direction of the arrows combined with the electrical contact elements 10 of Figure 1. Figure 9 illustrates four rows of the the electrical contact elements 10 in the housing 90.

Preferably, the housing 90 is made of or from a high temperature resin, such as, polyphenylene sulfide resin.

Those skilled in the art, having the benefit of the teachings of the present invention as hereinabove set forth, can effect numerous modifications thereto. These modifications are to be construed as being encompassed within the scope of the present invention as set forth in the appended claims.

This Sheet Has Been Replaced





EL-4322

CLAIM(S)

What is claimed is:

- 5 1. A retention portion of an electrical contact element for mechanical connection in a hole through a connector housing comprising:

10 a plurality of opposed upsets of progressively different sizes,

whereby when the element is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an
15 incremental interference with the hole during insertion while substantially preventing sliver formation.

- 20 2. The retention portion of Claim 1, wherein the hole is substantially oblong.

3. The element of Claim 2, wherein the hole has two opposed flat sides.

- 25 4. The retention portion of Claim 1, wherein:

there are at least three pairs of opposed upsets; and

30 a distance between distal tips of the upsets in the pairs of opposed upsets incrementally increases from one end of the retention portion to another end of the retention portion.

- 35 5. The retention portion of Claim 1, wherein each one of the upsets comprises:

This Sheet Has Been Replaced



a pair of projections, each one of the projections having a first surface, a second surface and a third surface.

5 6. The retention portion of Claim 5, further comprising:

a first side having a mid-portion and edge portions, a second side having an intermediate strip, a third side having a mid-portion and edge portions and a fourth side having an intermediate strip;

shoulders extending from the mid-portions of the first and third sides;

15 the first and second surfaces connected perpendicular or substantially perpendicular to the shoulders; and

the third surfaces being dome shaped and connected between the first surfaces, the second surfaces and either the intermediate strip of the second side or the intermediate strip of the fourth side.

25 7. The retention portion of Claim 6, wherein:

the first surfaces of a first insertion pair of the opposed upsets have first edges that intersect with the edge portions of the first and third sides; and

30 the second surfaces of a last insertion pair of the opposed upsets connect to ledges, the ledges defined by one of the the second surfaces of the projections in the last insertion pair of opposed upsets, one of the shoulders, either the first side or the third side, and
35 either the second side or the fourth side.

8. The retention portion of Claim 6, wherein:

This Sheet Has Been Replaced



the second side and the fourth side further have lateral strips which extend between each pair of the projections; and

5 faces connect the lateral strips to the shoulders.

9. The retention portion of Claim 8, wherein:

10 the first surfaces of any pair of the opposed upsets between the first insertion pair of the opposed upsets and the last insertion pair of the opposed upsets have first edges that intersect with the faces;

15 the second surfaces of all pairs of the opposed upsets, except the last insertion pair of the opposed upsets, have second edges that intersect with the faces; and

20 the second surfaces of a last insertion pair of the opposed upsets connect to ledges, the ledges defined by one of the the second surfaces of the projections in the last insertion pair of opposed upsets, one of the shoulders, either the first side or the third side, and
25 either the second side or the fourth side.

10. An electrical contact element for mechanical connection in a hole through a connector housing comprising:

30 a force receiving end portion;

 an insertion end portion; and

35 a retention section between the force receiving end portion and the insertion end portion, the retention section including a plurality of opposed upsets of progressively different sizes,

This Sheet Has Been Replaced



whereby when the insertion end portion is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion while substantially preventing sliver formation.

11. The electrical contact element of Claim 10, wherein the element comprises a pin having a substantially square cross section and the upsets extend only beyond two opposed sides of the pin.

12. The electrical contact element of Claim 10, wherein the hole has two opposed flat sides.

13. The electrical contact element of Claim 12, wherein the hole has two opposed flat sides.

14. The electrical contact element of Claim 10, wherein:

there are at least three pairs of opposed upsets; and

a distance between distal tips of the upsets in the pairs of opposed upsets incrementally increases from one end of the retention portion to another end of the retention portion.

15. The electrical contact element of Claim 10, wherein each one of the upsets comprises:

a pair of projections, each one of the projections having a first surface, a second surface and a third surface.

16. The electrical contact element of Claim 15, further comprising:

This Sheet Has Been Replaced





a first side having a mid-portion and edge portions, a second side having an intermediate strip, a third side having a mid-portion and edge portions and a fourth side having an intermediate strip;

shoulders extending from the mid-portions of the first and third sides;

the first and second surfaces connected perpendicular or substantially perpendicular to the shoulders; and

the third surfaces being dome shaped and connected between the first surfaces, the second surfaces and either the intermediate strip of the second side or the intermediate strip of the fourth side.

17. The electrical contact element of Claim 16, wherein:

the first surfaces of a first insertion pair of the opposed upsets have first edges that intersect with the edge portions of the first and third sides; and

the second surfaces of a last insertion pair of the opposed upsets connect to ledges, the ledges defined by one of the the second surfaces of the projections in the last insertion pair of opposed upsets, one of the shoulders, either the first side or the third side, and either the second side or the fourth side.

18. The electrical contact element of Claim 16, wherein:

the second side and the fourth side further have lateral strips which extend between each pair of the projections; and

This Sheet Has Been Replaced





faces connect the lateral strips to the shoulders.

19. The electrical contact element of Claim 18, wherein:

5

the first surfaces of any pair of the opposed upsets between the first insertion pair of the opposed upsets and the last insertion pair of the opposed upsets have first edges that intersect with the faces;

10

the second surfaces of all pairs of the opposed upsets, except the last insertion pair of the opposed upsets, have second edges that intersect with the faces; and

15

the second surfaces of a last insertion pair of the opposed upsets connect to ledges, the ledges defined by one of the the second surfaces of the projections in the last insertion pair of opposed upsets, one of the shoulders, either the first side or the third side, and either the second side or the fourth side.

20

20. An electrical connector comprising:

25

a housing having a plurality of hole arranged in rows and columns;

30

an electrical contact element for mechanical connection in each one of the holes, each one of the electrical contact elements comprising:

35

a force receiving end portion;

an insertion end portion; and

a retention section between the force receiving end portion and the insertion end portion, the retention

This Sheet Has Been Replaced





section including a plurality of opposed upsets of progressively different sizes,

whereby when the insertion end portion is
5 inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion while substantially preventing sliver formation.

10

21. The electrical connector of Claim 20, wherein the connector is a header.

22. The electrical connector of Claim 20, wherein the
15 housing is made from polyphenylene sulfide resin.

This Sheet Has Been Replaced



TITLE OF THE INVENTION

CONNECTOR, CIRCUIT BOARD CONTACT ELEMENT
AND RETENTION PORTION

5

ABSTRACT OF THE DISCLOSURE

The present invention relates to circuit board contact elements and compliant sections thereof which are mounted in plated-through holes in printed circuit boards, generally in conjunction with a plastic header or other electrical connectors.

10

This Sheet Has Been Replaced






FIG. 1

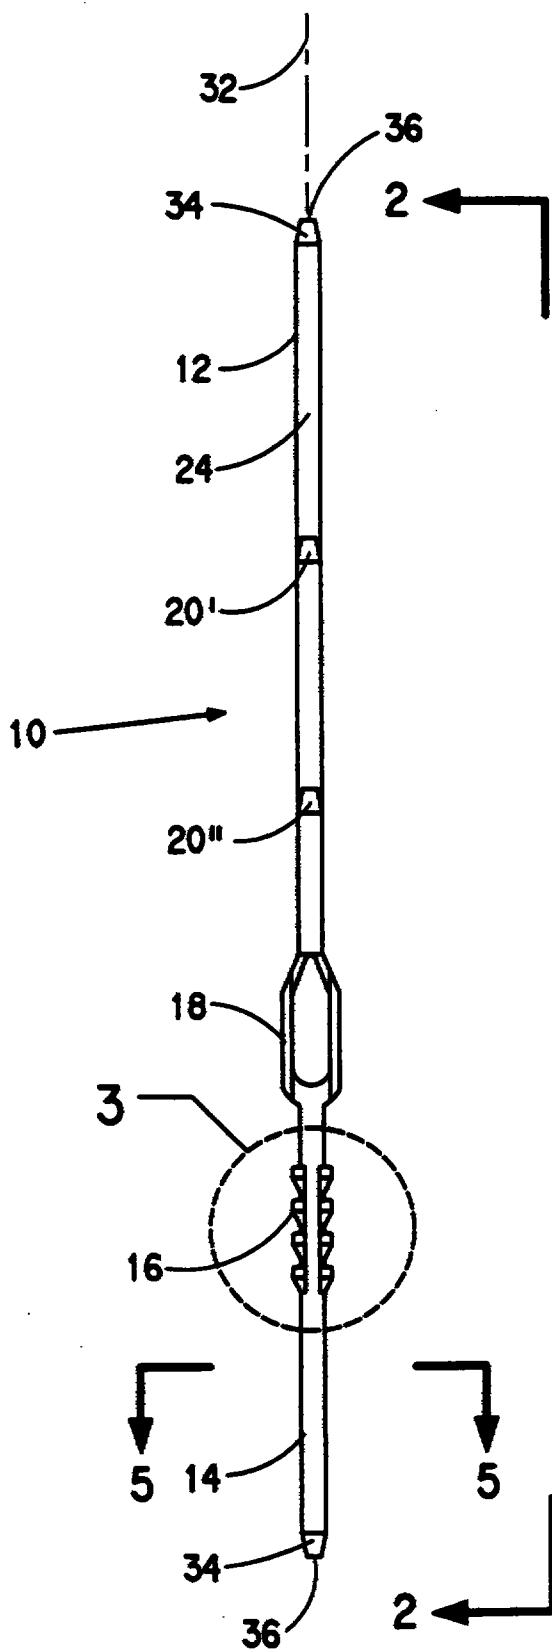


FIG. 2

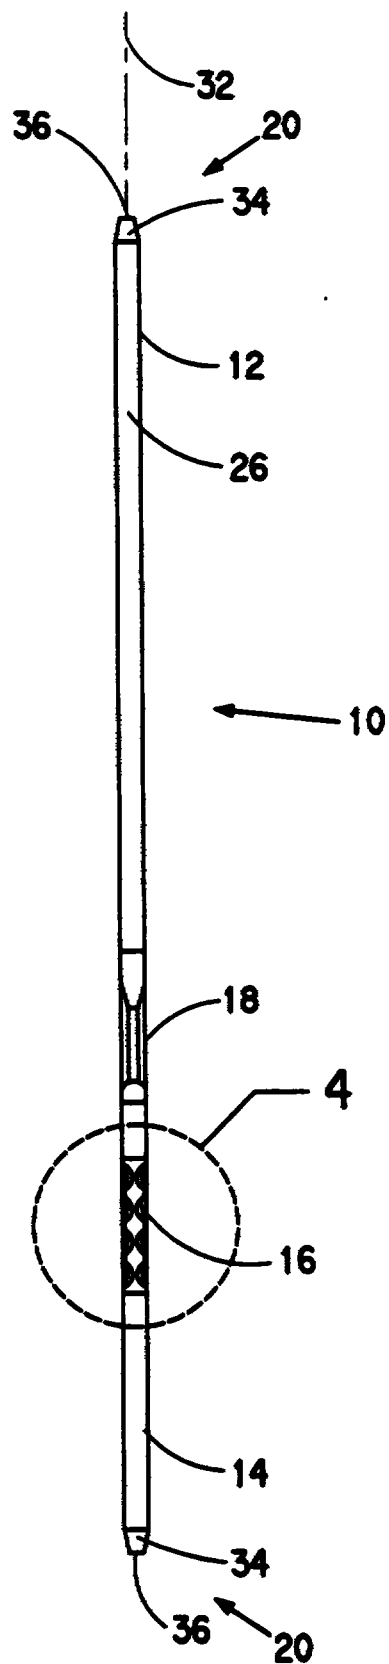




FIG. 3

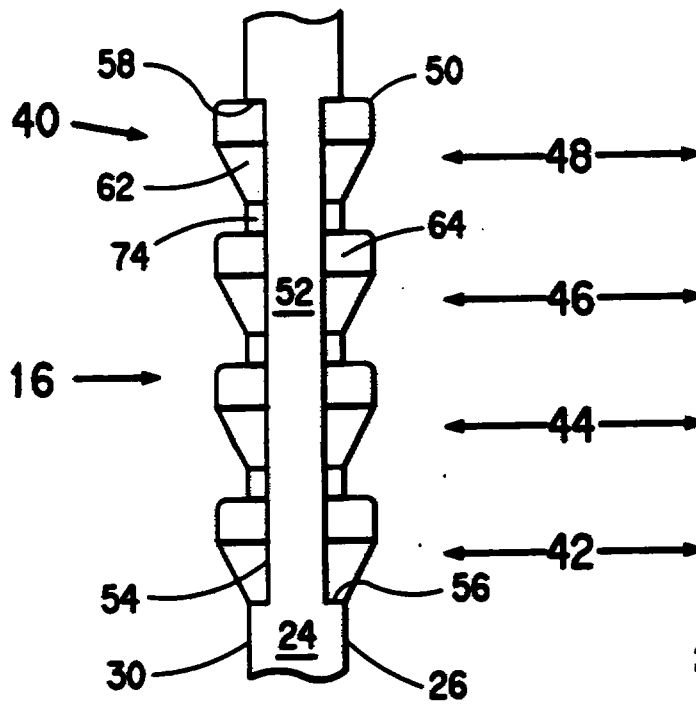


FIG. 4

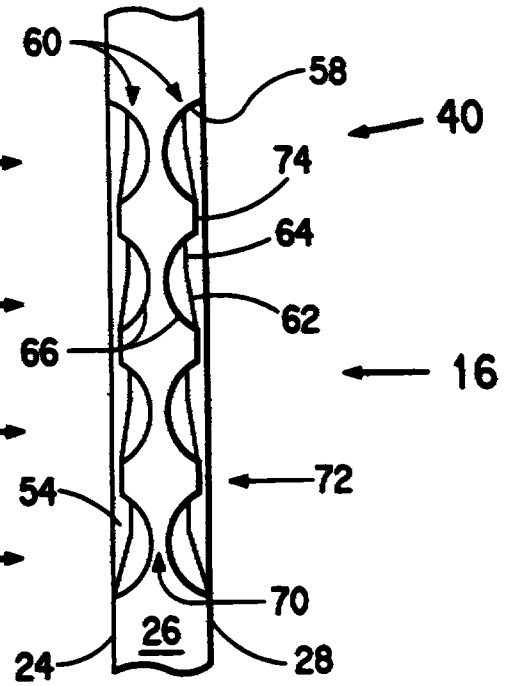


FIG. 5

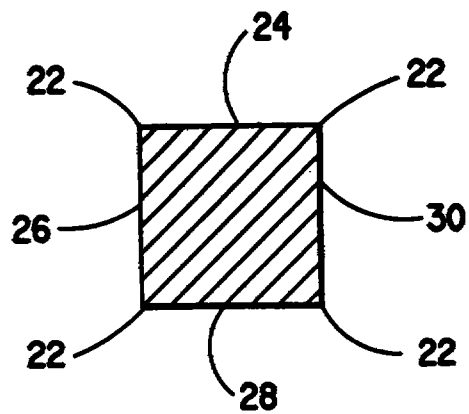


FIG. 6

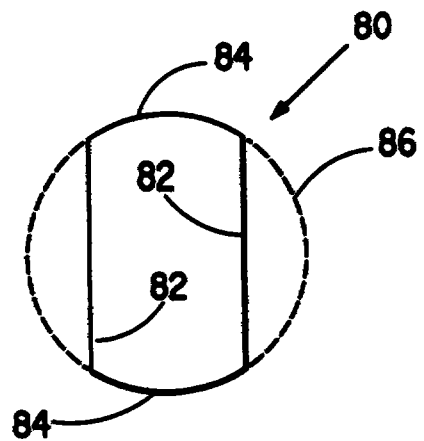




FIG. 9

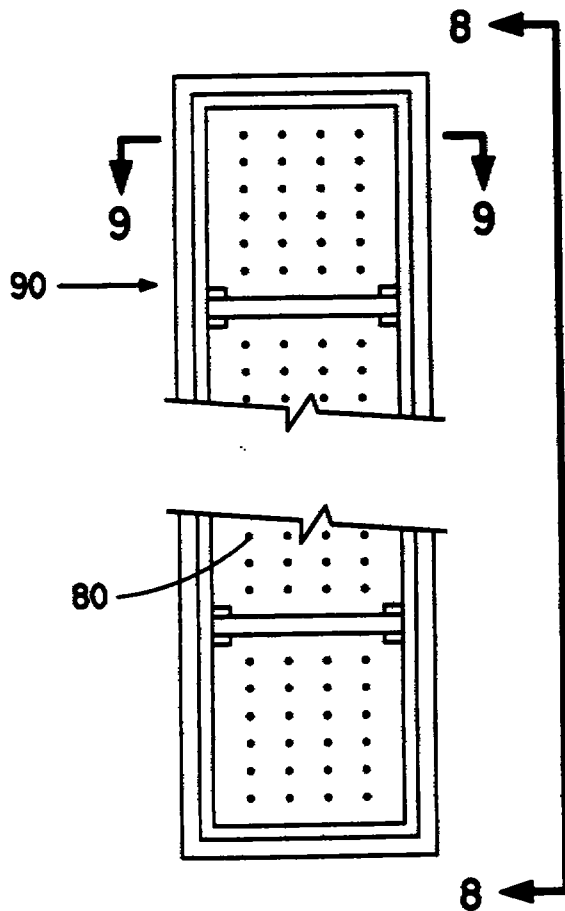
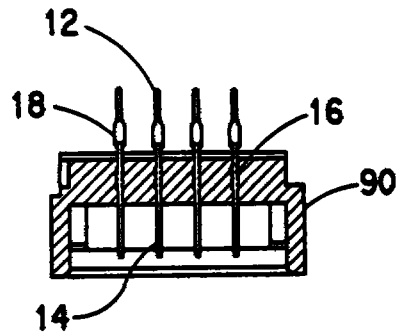


FIG. 7

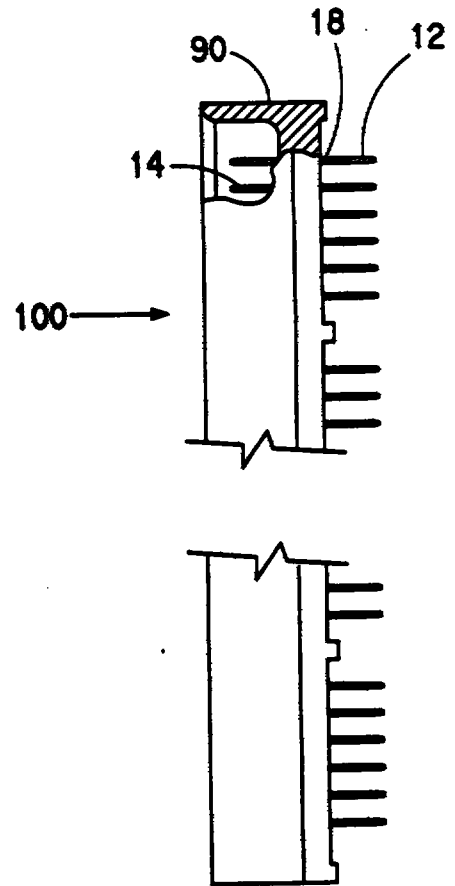


FIG. 8

REPLACED SHEETS		SG
☒	Description	: paged ...1... to paged ...12...
☒	Claim(s)	: paged ...9... to paged ...17...
☒	Drawing(s)	: paged ...1/4... to paged ...3/4...
☒	Abstract	: paged ...17... to paged
DATE OF RECEIPT		

9603 165-3 1111

1

TITLE OF THE INVENTION

This Sheet Has Been Replaced



CONNECTOR, CIRCUIT BOARD CONTACT ELEMENTS
AND RETENTION PORTION

REPLACEMENT SHEETS		SG
☒	Description	: paged ...1... to paged ...12...
☒	Claim(s)	: paged ...11... to paged ...17...
☒	Drawing(s)	: paged ...1/4... to paged ...3/4...
☒	Abstract	: paged ...17... to paged

BACKGROUND OF THE INVENTION

1. Field of the Invention.

This invention relates to circuit board contact elements and retention sections thereof which are for mounting in holes in connector housings, specifically header housings.

2. Description of Related Art.

Electrical contacts, otherwise referred to as terminals, contact elements or pins, are used in the electronics industry in conjunction with printed circuit (PC) boards and panel boards for making electrical connections between, and among, circuits.

A plurality of the contacts are frequently mounted in an insulative connector housing with one end of contacts extending from the connector housing for making mechanical and electrical contact with a conductive path on the PC board. The other end of the contacts typically extend through holes in the connector housing for mechanical and electrical connection with contacts in a mating connector.

In a high pin count (HPC) header which is a commercially available male connector, contacts or wire pins having a 0.025 inch square cross section are staked in round holes in a plastic housing. Retention of the pins in the housing is achieved by an interference fit between corners of the square pin and the round hole in the housing. The pins are made from phosphor bronze and plated with gold over nickel under plating. The housing is made from polyetherimide resin. During the staking process, slivers of plated coatings are formed due to scraping on the pin corners. These slivers present a potential for electrical short. As such, these slivers are removed by brushing, blowing and/or washing operations at added cost.

REPLACEMENT

24 SEP

24 SEP 1996

This Sheet Has Been Replaced



2

It is an object of this invention to provide a retention portion of an electrical contact element that substantially does not produce slivers when staked in a hole through a connector housing.

Further, it is an object of this invention to provide a retention portion of an electrical contact element that substantially does not produce slivers when staked in a hole through a header housing.

Further, it is an object of this invention to provide a retention portion of an electrical contact element that substantially does not produce slivers when staked in a hole through a header housing made of a high temperature resin.

SUMMARY OF THE INVENTION

The invention is directed to a retention portion of an electrical contact element for mechanical connection in a hole through a connector housing comprising:

a plurality of opposed upsets of progressively different sizes,

whereby when the element is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion while substantially preventing sliver formation.

The invention is further directed to an electrical contact element for mechanical connection in a hole through a connector housing comprising:

a force receiving end portion;

an insertion end portion; and

a retention section between the force receiving end portion and the insertion end portion, the retention section including a plurality of opposed upsets of progressively different sizes,

whereby when the insertion end portion is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole

during insertion while substantially preventing sliver formation.

The invention is further directed to an electrical connector comprising:

a housing having a plurality of hole arranged in rows and columns;

an electrical contact element for mechanical connection in each one of the holes, each one of the electrical contact elements comprising:

a force receiving end portion;

an insertion end portion; and

a retention section between the force receiving end portion and the insertion end portion, the retention section including a plurality of opposed upsets of progressively different sizes,

whereby when the insertion end portion is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion while substantially preventing sliver formation.


BRIEF DESCRIPTION OF THE DRAWINGS


The invention can be more fully understood from the following detailed description thereof in connection with accompanying drawings which form a part of this application and in which:

Figure 1 is a front side view of an electrical contact element for mechanical connection in a hole through a connector housing in accordance with the present invention.

Figure 2 is a right side view of the electrical contact element of Figure 1 taken on the line 2-2 in the direction of the arrows.

Figure 3 is an enlarged front side view of a retention portion of the electrical contact element in circle 3 of Figure 1.

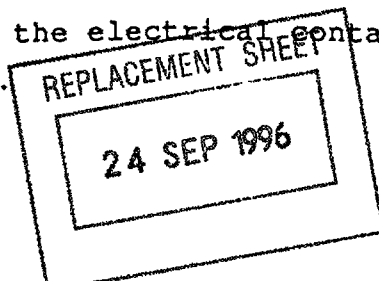

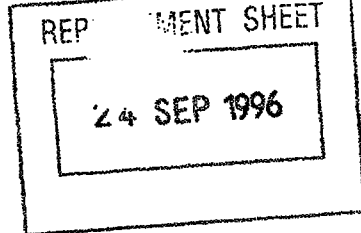

This Sheet Has Been Replaced



Figure 4 is an enlarged right side view of the retention portion of the electrical contact element in circle 4 of Figure 2.

Figure 5 is a cross sectional view of the electrical contact element of Figure 1 taken on the line 5-5 in the direction of the arrows.

Figure 6 is a schematic representation of a preferred embodiment of an oblong hole through a connector housing for receiving the electrical contact element of Figure 1.

Figure 7 a top side view of a header having a plurality of the electrical contact elements of the present invention staked in oblong holes through the header housing.

Figure 8 a right side view of the header of Figure 7 taken on the line 8-8 in the direction of the arrows.

Figure 9 a cross sectional view of the header of Figure 7 taken on the line 9-9 in the direction of the arrows.

DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

Throughout the following detailed description, similar reference characters refer to similar elements in all figures of the drawings.

Referring to Figure 1, there is illustrated a front side view of an electrical contact element 10 for mechanical connection in a hole through a connector housing in accordance with the present invention. Figure 2 is a right side view of the electrical contact element 10 of Figure 1 taken on the line 2-2 in the direction of the arrows.

The electrical contact element 10 comprises a force receiving end portion 12, an insertion end portion 14 and a retention portion 16 between the force receiving end portion 12 and the insertion end portion 14. The electrical contact element 10 may optionally, but does not have to, have a compliant portion 18 for forcing into a

24 SEP 1996

This Sheet Has Been Replaced



5

plated hole through a printed circuit board. The compliant portion 18 can be a press-fit section for creating an interference fit between the contact element 10 in a hole without the need for additional fastening means, such as, soldering. Illustrative press-fit sections that can be used for the compliant section 18 include those disclosed in U.S. Patent 4,274,699 or 4,728,164. Alternatively, the compliant portion 18 can be designed so as to require additional fastening means, such as, soldering. One such compliant section may be a star section.

The force receiving end portion 12 and the insertion end portion 14 preferably have a square cross section, except at distal ends 20. Further, the force receiving end portion 12 and the insertion end portion 14 may have square or rounded corners 22. Square corners 22 are illustrated in Figure 5 which discloses a cross sectional view of the electrical contact element 10 of Figure 1 taken on the line 5-5 in the direction of the arrows.

The force receiving end portion 12 and the insertion end portion 14, thus, comprise a first substantially flat side 24, a second substantially flat side 26, a third substantially flat side 28, and a fourth substantially flat side 30. The first side 24 and the third side 28 are substantially parallel to one another. The second side 26 and the fourth side 30 are substantially parallel to one another. The first side 24 and the third side 28 are substantially perpendicular to the second side 26 and the fourth side 30.

The electrical contact element 10 has a longitudinal axis 32. The element 10 is symmetric or substantially symmetric about the longitudinal axis 32. The element 10 has a first mid-plane that contains the longitudinal axis 32 and bisects the element 10 between the first side 24 and the third side 28. The first mid-plane is, thus, parallel to the first side 24 and the third side 28. The element 10 is symmetric or substantially symmetric about the first mid-plane. The element 10 has a second

24 SEP 1996



mid-plane that contains the longitudinal axis 32 and bisects the element 10 between the second side 26 and the fourth side 30. The second mid-plane is, thus, parallel to the second side 26 and the fourth side 30. The element 10 is symmetric or substantially symmetric about the second mid-plane.

The distal ends 20 can be shaped like truncated pyramids having four inclined surfaces 34 which slope towards the longitudinal axis 32 of the electrical contact element 10 and intersect or terminate at a substantially flat end surface 36.

The force receiving end portion 12 and/or the insertion end portion 14 of the electrical contact element 10 can have different lengths depending on their intended uses. This is illustrated in Figure 1 by depicting alternate positions 20' and 20" of one of the force receiving end portion distal end 34.

Figure 3 is an enlarged front side view of the retention portion 16 of the electrical contact element 10 in circle 3 of Figure 1. Figure 4 is an enlarged right side view of the retention portion 16 of the electrical contact element 10 in circle 4 of Figure 2.

Referring in particular to Figure 3, the retention portion 16 comprises a plurality of opposed upsets 40 of progressively different sizes. Multiple pairs of upsets 40 provide retention and stability of the element 10 in a housing. Preferably, the retention portion 16 has at least three pairs of the opposed upsets 40. The embodiment illustrated in the drawings has a first insertion pair 42 of the opposed upsets 40, a second insertion pair 44 of the opposed upsets 40, a third insertion pair 46 of the opposed upsets 40, and a fourth insertion pair 48 of the opposed upsets 40. The first pair 42 is the closest to the insertion end portion 14. The second pair 44 is the next or second closest to the insertion end portion 14. The third pair 46 is the third closest to the insertion end portion 14. The fourth pair 48 is the fourth closest to the insertion end portion 14.

24 SEP 1996

This Sheet Has Been Replaced




7

The first pair 42 has a first distance between its distal tips 50 which is shorter than the distance between distal tips 50 of all the other pairs 44, 46, and 48 of the opposed upsets 40. The second pair 44 has a second distance between its distal tips 50 that is slightly longer than the first distance, but is shorter than the distance between distal tips 50 of the third pair 46 and fourth pair 48 of the opposed upsets 40. The third pair 46 has a third distance between its distal tips 50 that is slightly longer than the second distance, but is shorter than the distance between distal tips 50 of the fourth pair 48 of the opposed upsets 40. The fourth pair 48 has a fourth distance between its distal tips 50 that is slightly longer than the third distance. In other words, the distance between distal tips 50 of the upsets 40 in the pairs of upsets 40 incrementally increases from the insertion end portion 14 to the force receiving portion 12.

A central portion 52 of the first side 24 and the third side 28 extends between the upsets 40 in each of the pairs of upsets 40. Each one of the central portions 52 has two shoulders 54. The shoulders 54 are generally parallel to the second side 26 and the fourth side 30. Each shoulder 54 extends between one edge of the central portions 52 and one of the upsets 40.

Referring to Figures 3 and 4, each one of the upsets 40 preferably comprises a pair of bumps or projections 60. Each one of the bumps or projections 60 can be described as having a first surface 62, a second surface 64 and a third surface 66. Preferably, the first surfaces 62 and the second surfaces 64 are flat or substantially flat. Preferably, the third surfaces 66 are curved or dome-like.

The first surfaces 62 and the second surfaces 64 are connected perpendicular or substantially perpendicular to the shoulders 54. The first surfaces 62 are also connected to the second surfaces 64 and the third surfaces 66. The second surfaces 64 are connected to the first surfaces 62 and third surfaces 66. The third surfaces 66

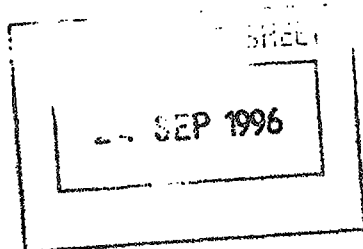


connect the first surfaces 62 and the second surfaces 64 to either the second side 26 or the fourth side 30. In Figure 4, the third surfaces 66 are extending up from the second side 26 in a curved or dome-like fashion to meet with the upper edges of the first surfaces 62 and the second surfaces 64. Edges of the surfaces or intersections between the surfaces and the other surfaces, sides or shoulders can be rounded or angular.

An intermediate strip 70 of the second side 26 and the fourth side 30 can optionally extend between the pairs of projections 60. A lateral strip 72 of the second side 26 and the fourth side 30 can optionally extend between each pair of the projections 60. In the embodiment illustrated in Figures 3 and 4, the lateral strips 72 have faces 74 extending to the shoulders 54.

Each one of the first surfaces 62 of the four projections 60 in the first pair 42 of upsets 40 has a first edge that intersects with an edge portion 56 of the first side 24 and the third side 28. As seen in Figure 3, the first side 24 has two edge portions 56. Similarly, the third side 28 has two edge portions 56. Each one of the four first surfaces 62 of the upsets 40 in the first pair 42 incline or slope away from a respective one of the edge portions 56 towards, and at a first angle with respect to, the first mid-plane. Each one of the four first surfaces 62 of the upsets 40 in the first pair 42 have a second edge that intersects a first edge of the second surfaces 64.

Each one of the second surfaces 64 of the upsets 40 in the first pair 42 incline or slope away from the first surfaces 62 and the first mid-plane at a second angle with respect to the first mid-plane. Preferably, the second angle is less than the first angle. The second surfaces 64 may even be parallel to the first mid-plane. Each one of the second surfaces 64 of the upsets 40 in the first pair 42 intersects in a curved or rounded fashion one of the faces 74 of the lateral strips 72 between the first pair of projections 60 and the second pair of projections 60.

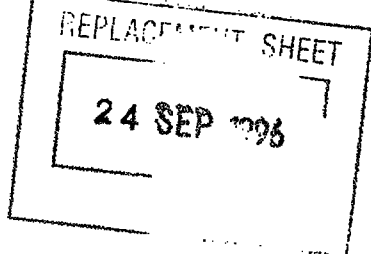

This Sheet Has Been Replaced



9

Each one of the four third surfaces 66 of the upsets 40 in the first pair 42 connect to distal edges of the first surfaces 62 and the second surfaces 64. Each one of the third surfaces 64 extends in a curved or globe-like fashion and intersects either the second side 26 or the fourth side 30 in a curved line.

The other projections 60 in the second, third and fourth pair of upsets 40 are configured like the aforesdescribed projections 60 in the first pair 42 of upsets 40. However, the first edge of the first surfaces 62 in the projections 60 in the second, third and fourth pair of upsets 40 intersect one of the faces 74, rather than the edge portion 56. Further, the second surfaces 64 of the projections 60 in the fourth pair 48 of upsets 40 connect to a ledge 58, rather than the face 74. There are four ledges 58. Each one of the ledges 58 is defined by one of the the second surfaces 64 of the projections 60 in the fourth pair 48 of upsets 40, one of the four shoulders 54, either the first side 24 or the third side 28, and either the second side 26 or the fourth side 30.

The opposed upsets 40 are made by squeezing or pinching the edge portions 56 of the first side 24 and the third side 28 towards one another.

The contact elements 10 of the present invention can be made from any suitable metal used for electrical terminals, such as brass, phosphor bronze, beryllium copper and the like. The contact elements 10 may be plated or coated with one or more conductive layer, such as tin, nickel, pladium, gold, silver or a suitable alloy.

The retention portion 16 is for staking in and mechanical connection to a hole 80 through a connector housing. Figure 6 is a schematic representation of a preferred embodiment of a substantially oblong hole 80 through a connector housing for receiving the electrical contact element of Figure 1. The substantially oblong hole 80 has two opposed flat and parallel walls 82. The flat walls 82 are connected by cylindrical or curved walls 84 which can be parts of a same cylinder 86. Preferably, only




the retention portion 16 contacts the hole wall(s) 82, 84 in the housing. This is accomplished by inserting the element 10 into the substantially oblong hole 80 such that only the upsets 40 contact the flat walls 82 in the hole geometry depicted in Figure 6. This provides clearance between the element 10 and the housing which avoids scraping corners 22 of the element 10 on the housing and eliminates or significantly reduces sliver formation. This hole geometry is also better for injection molding of the housing than round or square holes.

Figure 7 a top side view of a connector housing and, specifically, a header housing for receiving a plurality of the electrical contact elements 10 of the present invention staked in oblong holes 80 through the header housing 90. Figure 8 a right side view of a connector and, more specifically, a header 100 comprising a plurality of the electrical contact elements 10 of Figure 1 in the header housing 90 of Figure 7 taken on the line 8-8 in the direction of the arrows. In Figure 8, a portion of the housing 90 has been broken away to clearly show columns of the insertion end portions 14 of the electrical contact elements 10. Figure 9 a cross sectional view of the header housing 90 of Figure 7 taken on the line 9-9 in the direction of the arrows combined with the electrical contact elements 10 of Figure 1. Figure 9 illustrates four rows of the the electrical contact elements 10 in the housing 90.

Preferably, the housing 90 is made of or from a high temperature resin, such as, polyphenylene sulfide resin.

Those skilled in the art, having the benefit of the teachings of the present invention as hereinabove set forth, can effect numerous modifications thereto. These modifications are to be construed as being encompassed within the scope of the present invention as set forth in the appended claims.

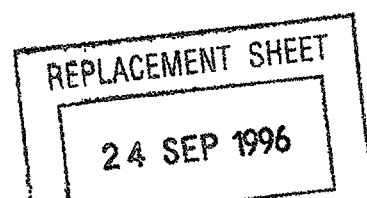

CLAIM(S)

What is claimed is:

1. A retention portion of an electrical contact element for mechanical connection in a hole through a connector housing comprising:

a plurality of opposed upsets of progressively different sizes,

whereby when the element is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion while substantially preventing sliver formation.

2. The retention portion of Claim 1, wherein the hole is substantially oblong.


3. The element of Claim 2, wherein the hole has two opposed flat sides.

4. The retention portion of Claim 1, wherein:

there are at least three pairs of opposed upsets; and

a distance between distal tips of the upsets in the pairs of opposed upsets incrementally increases from one end of the retention portion to another end of the retention portion.

5. The retention portion of Claim 1, wherein each one of the upsets comprises:

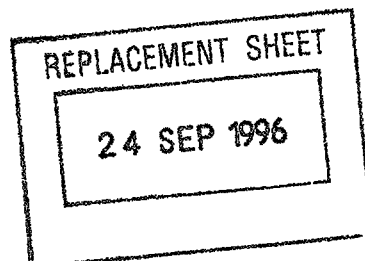



a pair of projections, each one of the projections having a first surface, a second surface and a third surface.

6. The retention portion of Claim 5, further comprising:

a first side having a mid-portion and edge portions, a second side having an intermediate strip, a third side having a mid-portion and edge portions and a fourth side having an intermediate strip;

shoulders extending from the mid-portions of the first and third sides;

the first and second surfaces connected perpendicular or substantially perpendicular to the shoulders; and


the third surfaces being dome shaped and connected between the first surfaces, the second surfaces and either the intermediate strip of the second side or the intermediate strip of the fourth side.

7. The retention portion of Claim 6, wherein:

the first surfaces of a first insertion pair of the opposed upsets have first edges that intersect with the edge portions of the first and third sides; and

the second surfaces of a last insertion pair of the opposed upsets connect to ledges, the ledges defined by one of the the second surfaces of the projections in the last insertion pair of opposed upsets, one of the shoulders, either the first side or the third side, and either the second side or the fourth side.

8. The retention portion of Claim 6, wherein:

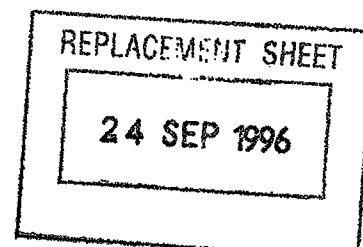



the second side and the fourth side further have lateral strips which extend between each pair of the projections; and

faces connect the lateral strips to the shoulders.

9. The retention portion of Claim 8, wherein:

the first surfaces of any pair of the opposed upsets between the first insertion pair of the opposed upsets and the last insertion pair of the opposed upsets have first edges that intersect with the faces;

the second surfaces of all pairs of the opposed upsets, except the last insertion pair of the opposed upsets, have second edges that intersect with the faces; and


the second surfaces of a last insertion pair of the opposed upsets connect to ledges, the ledges defined by one of the the second surfaces of the projections in the last insertion pair of opposed upsets, one of the shoulders, either the first side or the third side, and either the second side or the fourth side.

10. An electrical contact element for mechanical connection in a hole through a connector housing comprising:

a force receiving end portion;

an insertion end portion; and

a retention section between the force receiving end portion and the insertion end portion, the retention section including a plurality of opposed upsets of progressively different sizes,

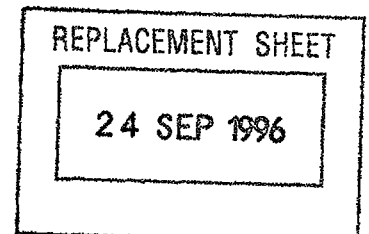



whereby when the insertion end portion is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion while substantially preventing sliver formation.

11. The electrical contact element of Claim 10, wherein the element comprises a pin having a substantially square cross section and the upsets extend only beyond two opposed sides of the pin.

12. The electrical contact element of Claim 10, wherein the hole has two opposed flat sides.

13. The electrical contact element of Claim 12, wherein the hole has two opposed flat sides.

14. The electrical contact element of Claim 10, wherein

there are at least three pairs of opposed upsets; and

a distance between distal tips of the upsets in the pairs of opposed upsets incrementally increases from one end of the retention portion to another end of the retention portion.

15. The electrical contact element of Claim 10, wherein each one of the upsets comprises:

a pair of projections, each one of the projections having a first surface, a second surface and a third surface.

16. The electrical contact element of Claim 15, further comprising:

REPLACEMENT SHEET

24 SEP 1996



a first side having a mid-portion and edge portions, a second side having an intermediate strip, a third side having a mid-portion and edge portions and a fourth side having an intermediate strip;

shoulders extending from the mid-portions of the first and third sides;

the first and second surfaces connected perpendicular or substantially perpendicular to the shoulders; and

the third surfaces being dome shaped and connected between the first surfaces, the second surfaces and either the intermediate strip of the second side or the intermediate strip of the fourth side.


17. The electrical contact element of Claim 16, wherein:


the first surfaces of a first insertion pair of the opposed upsets have first edges that intersect with the edge portions of the first and third sides; and

the second surfaces of a last insertion pair of the opposed upsets connect to ledges, the ledges defined by one of the the second surfaces of the projections in the last insertion pair of opposed upsets, one of the shoulders, either the first side or the third side, and either the second side or the fourth side.

18. The electrical contact element of Claim 16, wherein:

the second side and the fourth side further have lateral strips which extend between each pair of the projections; and

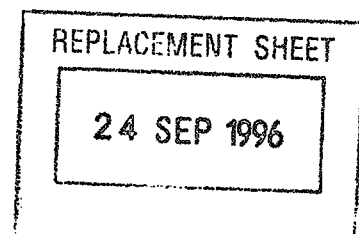



faces connect the lateral strips to the shoulders.

19. The electrical contact element of Claim 18, wherein:

the first surfaces of any pair of the opposed upsets between the first insertion pair of the opposed upsets and the last insertion pair of the opposed upsets have first edges that intersect with the faces;

the second surfaces of all pairs of the opposed upsets, except the last insertion pair of the opposed upsets, have second edges that intersect with the faces; and

the second surfaces of a last insertion pair of the opposed upsets connect to ledges, the ledges defined by one of the the second surfaces of the projections in the last insertion pair of opposed upsets, one of the shoulders, either the first side or the third side, and either the second side or the fourth side.

20. An electrical connector comprising:


a housing having a plurality of hole arranged in rows and columns;

an electrical contact element for mechanical connection in each one of the holes, each one of the electrical contact elements comprising:

a force receiving end portion;

an insertion end portion; and

a retention section between the force receiving end portion and the insertion end portion, the retention

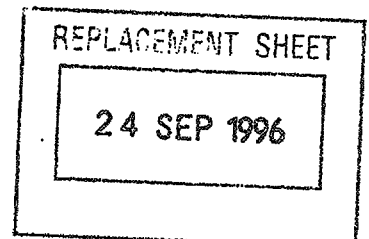



This Sheet Has Been Replaced




17

section including a plurality of opposed upsets of progressively different sizes,


whereby when the insertion end portion is inserted into the hole such that only the upsets come in contact with a wall of the hole when inserted therein, the offsets provide an incremental interference with the hole during insertion while substantially preventing sliver formation.

21. The electrical connector of Claim 20, wherein the connector is a header.

22. The electrical connector of Claim 20, wherein the housing is made from polyphenylene sulfide resin.

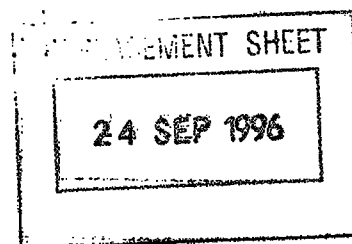

This Sheet Has Been Replaced



18


TITLE OF THE INVENTION


CONNECTOR, CIRCUIT BOARD CONTACT ELEMENT
AND RETENTION PORTION

ABSTRACT OF THE DISCLOSURE

The present invention relates to circuit board contact elements and compliant sections thereof which are mounted in plated-through holes in printed circuit boards, generally in conjunction with a plastic header or other electrical connectors.

FIGURE 1.

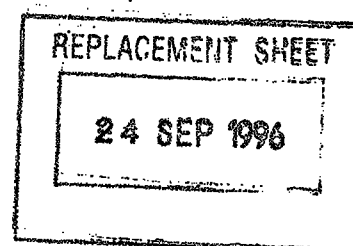

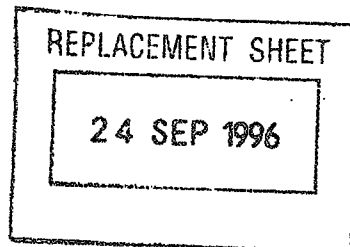

his Sheet Has Been Rep...

FIG. 3

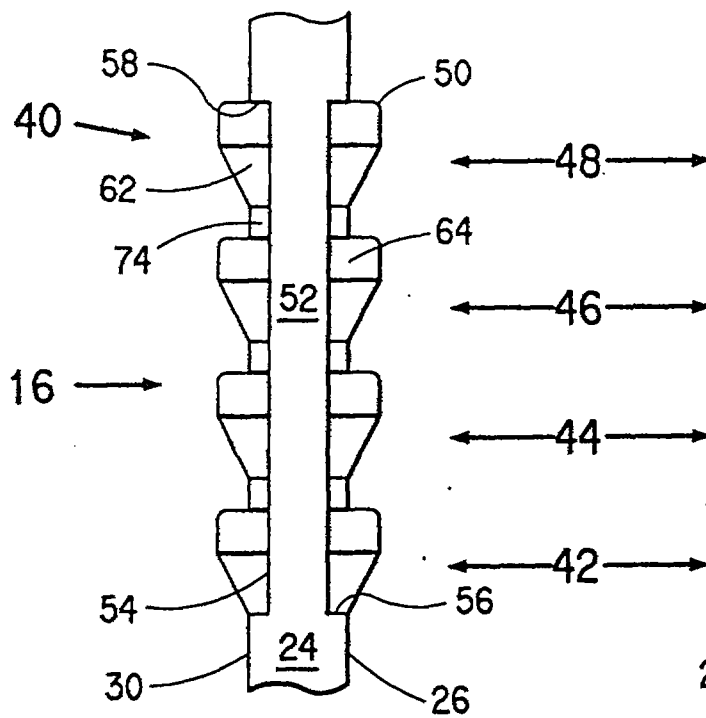


FIG. 4

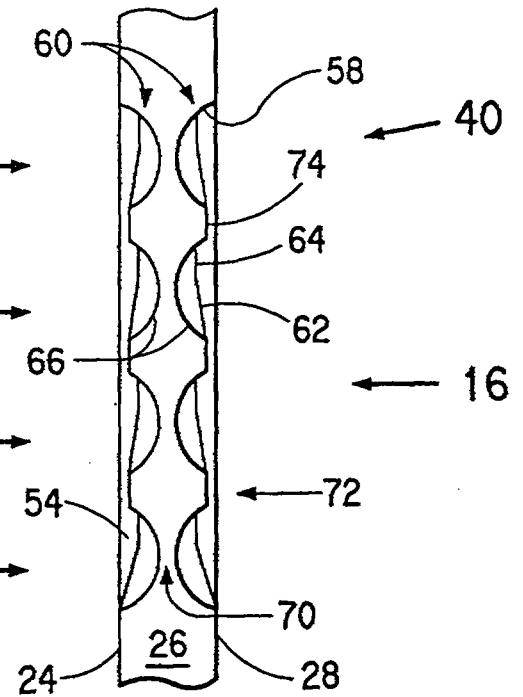


FIG. 5



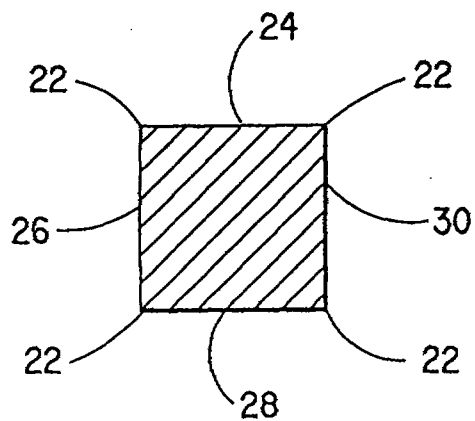


FIG. 6

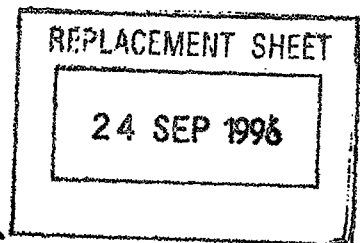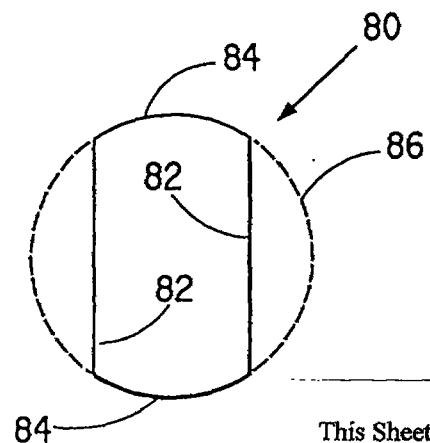

This Sheet Has Been Replaced



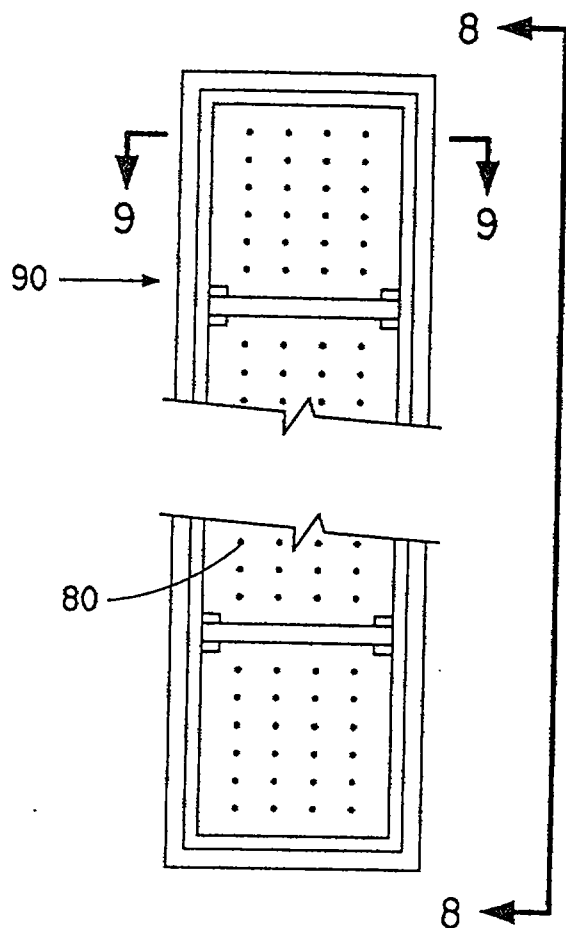


FIG. 7


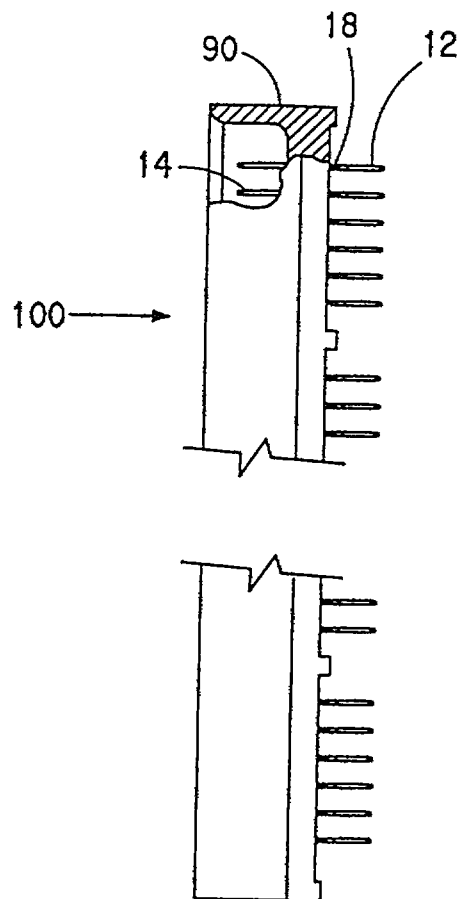




FIG. 8



This Sheet Has Been Replaced




FIG. 9

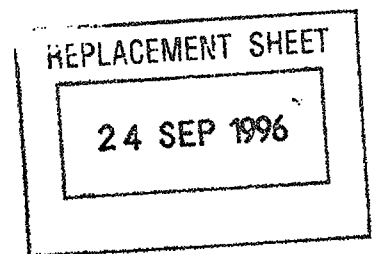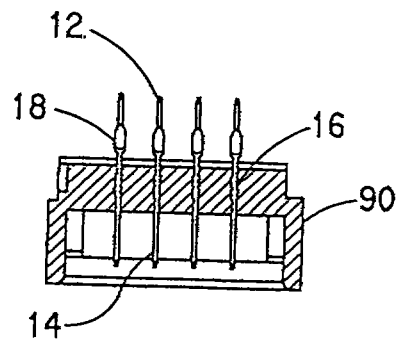

This Sheet Has Been Replaced



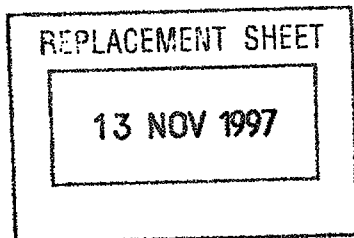

1

REPLACEMENT SHEETS	SG
☒ Description	: paged 1. to paged 12.
☒ Claim(s)	: paged 11. to paged 15.
☒ Drawing(s)	: paged 14. to paged 17.
☐ Abstract	: paged to paged
DATE OF RECEIPT 12/11/97.....	

**CONNECTOR, CIRCUIT BOARD CONTACT ELEMENT
AND RETENTION PORTION**

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention.

This invention relates to circuit board contact elements and retention sections thereof which are for mounting in holes in connector housings, specifically header housings.

2. Description of Related Art.

Electrical contacts, otherwise referred to as terminals, contact elements or pins, are used in the electronics industry in conjunction with printed circuit (PC) boards and panel boards for making electrical connections between, and among, circuits.

A plurality of the contacts are frequently mounted in an insulative connector housing with one end of contacts extending from the connector housing for making mechanical and electrical contact with a conductive path on the PC board. The other end of the contacts typically extend through holes in the connector housing for mechanical and electrical connection with contacts in a mating connector.

In a high pin count (HPC) header which is a commercially available male connector, contacts or wire pins having a 0.025 inch square cross section are staked in round holes in a plastic housing. Retention of the pins in the housing is achieved by an interference fit between

13 NOV 1997

corners of the square pin and the round hole in the housing. The pins are made from phosphor bronze and plated with gold over nickel under plating. The housing is made from polyetheremide resin. During the staking process, slivers of plated coatings are formed due to scraping on the pin corners. These slivers present a potential for electrical short. As such, these slivers are removed by brushing, blowing and/or washing operations at added cost.

EP-A-0 105 044 discloses an electric contact pin for use in printed circuit boards. The central portion of that contact pin has two longitudinal through cuts to form three resilient legs, the outer legs of which are bent in one direction while the inner leg is bent in the opposite direction. That prior art contact pin is to be soldered into a plated hole of a printed circuit board. The final mechanical and electrical connection is therefore made by the solder connection.

The invention as claimed in claims 1, 10 and 12, solves the problem of how to prevent slivers of plated coatings of the pins during insertion while maintaining the strength of the mechanical connection.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention can be more fully understood from the following detailed description thereof in connection with accompanying drawings which form a part of this application and in which:

Figure 1 is a front side view of an electrical contact element for mechanical connection in a hole through a connector housing in accordance with the present invention.

Figure 2 is a right side view of the electrical contact element of Figure 1 taken on the line 2-2 in the direction of the arrows.

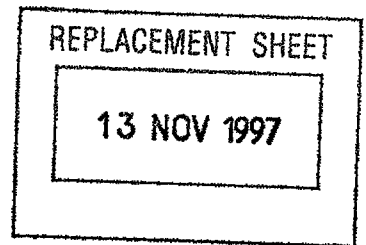


Figure 3 is an enlarged front side view of a retention portion of the electrical contact element in circle 3 of Figure 1.

Figure 4 is an enlarged right side view of the retention portion of the electrical contact element in circle 4 of Figure 2.

Figure 5 is a cross sectional view of the electrical contact element of Figure 1 taken on the line 5-5 in the direction of the arrows.

Figure 6 is a schematic representation of a preferred embodiment of an oblong hole through a connector housing for receiving the electrical contact element of Figure 1.

Figure 7 a top side view of a header having a plurality of the electrical contact elements of the present invention staked in oblong holes through the header housing.

Figure 8 a right side view of the header of Figure 7 taken on the line 8-8 in the direction of the arrows.

Figure 9 a cross sectional view of the header of Figure 7 taken on the line 9-9 in the direction of the arrows.

DESCRIPTION OF THE PREFERRED EMBODIMENT (S)

Throughout the following detailed description, similar reference characters refer to similar elements in all figures of the drawings.

Referring to Figure 1, there is illustrated a front side view of an electrical contact element 10 for mechanical connection in a hole through a connector housing in accordance with the present invention. Figure 2 is a right

13 NOV 1997

side view of the electrical contact element 10 of Figure 1 taken on the line 2-2 in the direction of the arrows.

The electrical contact element 10 comprises a force receiving end portion 12, an insertion end portion 14 and a retention portion 16 between the force receiving end portion 12 and the insertion end portion 14. The electrical contact element 10 may optionally, but does not have to, have a compliant portion 18 for forcing into a plated hole through a printed circuit board. The compliant portion 18 can be a press-fit section for creating an interference fit between the contact element 10 in a hole without the need for additional fastening means, such as, soldering. Illustrative press-fit sections that can be used for the compliant section 18 include those disclosed in U.S. Patent 4,274,699 or 4,728,164. Alternatively, the compliant portion 18 can be designed so as to require additional fastening means, such as, soldering. One such compliant section may be a star section.

The force receiving end portion 12 and the insertion end portion 14 preferably have a square cross section, except at distal ends 20. Further, the force receiving end portion 12 and the insertion end portion 14 may have square or rounded corners 22. Square corners 22 are illustrated in Figure 5 which discloses a cross sectional view of the electrical contact element 10 of Figure 1 taken on the line 5-5 in the direction of the arrows.

The force receiving end portion 12 and the insertion end portion 14, thus, comprise a first substantially flat side 24, a second substantially flat side 26, a third substantially flat side 28, and a fourth substantially flat side 30. The first side 24 and the third side 28 are substantially parallel to one another. The second side 26 and the fourth side 30 are substantially parallel to one another. The first side 24 and the third side 28 are substantially perpendicular to the second side 26 and the fourth side 30.

13 NOV 1997

The electrical contact element 10 has a longitudinal axis 32. The element 10 is symmetric or substantially symmetric about the longitudinal axis 32. The element 10 has a first mid-plane that contains the longitudinal axis 32 and bisects the element 10 between the first side 24 and the third side 28. The first mid-plane is, thus, parallel to the first side 24 and the third side 28. The element 10 is symmetric or substantially symmetric about the first mid-plane. The element 10 has a second mid-plane that contains the longitudinal axis 32 and bisects the element 10 between the second side 26 and the fourth side 30. The second mid-plane is, thus, parallel to the second side 26 and the fourth side 30. The element 10 is symmetric or substantially symmetric about the second mid-plane.

The distal ends 20 can be shaped like truncated pyramids having four inclined surfaces 34 which slope towards the longitudinal axis 32 of the electrical contact element 10 and intersect or terminate at a substantially flat end surface 36.

The force receiving end portion 12 and/or the insertion end portion 14 of the electrical contact element 10 can have different lengths depending on their intended uses. This is illustrated in Figure 1 by depicting alternate positions 20' and 20" of one of the force receiving end portion distal end 34.

Figure 3 is an enlarged front side view of the retention portion 16 of the electrical contact element 10 in circle 3 of Figure 1. Figure 4 is an enlarged right side view of the retention portion 16 of the electrical contact element 10 in circle 4 of Figure 2.


Referring in particular to Figure 3, the retention portion 16 comprises a plurality of opposed upsets 40 of progressively different sizes. Multiple pairs of upsets 40 provide retention and stability of the element 10 in a housing. Preferably, the retention portion 16 has at least

13 NOV 1997

three pairs of the opposed upsets 40. The embodiment illustrated in the drawings has a first insertion pair 42 of the opposed upsets 40, a second insertion pair 44 of the opposed upsets 40, a third insertion pair 46 of the opposed upsets 40, and a fourth insertion pair 48 of the opposed upsets 40. The first pair 42 is the closest to the insertion end portion 14. The second pair 44 is the next or second closest to the insertion end portion 14. The third pair 46 is the third closest to the insertion end portion 14. The fourth pair 48 is the fourth closest to the insertion end portion 14.

The first pair 42 has a first distance between its distal tips 50 which is shorter than the distance between distal tips 50 of all the other pairs 44, 46, and 48 of the opposed upsets 40. The second pair 44 has a second distance between its distal tips 50 that is slightly longer than the first distance, but is shorter than the distance between distal tips 50 of the third pair 46 and fourth pair 48 of the opposed upsets 40. The third pair 46 has a third distance between its distal tips 50 that is slightly longer than the second distance, but is shorter than the distance between distal tips 50 of the fourth pair 48 of the opposed upsets 40. The fourth pair 48 has a fourth distance between its distal tips 50 that is slightly longer than the third distance. In other words, the distance between distal tips 50 of the upsets 40 in the pairs of upsets 40 incrementally increases from the insertion end portion 14 to the force receiving portion 12.

A central portion 52 of the first side 24 and the third side 28 extends between the upsets 40 in each of the pairs of upsets 40. Each one of the central portions 52 has two shoulders 54. The shoulders 54 are generally parallel to the second side 26 and the fourth side 30. Each shoulder 54 extends between one edge of the central portions 52 and one of the upsets 40.

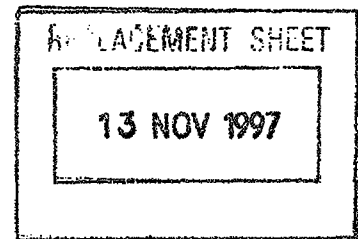

Referring to Figures 3 and 4, each one of the upsets 40 preferably comprises a pair of bumps or projections 60. Each one of the bumps or projections 60 can be described as having a first surface 62, a second surface 64 and a third surface 66. Preferably, the first surfaces 62 and the second surfaces 64 are flat or substantially flat. Preferably, the third surfaces 66 are curved or dome-like.

The first surfaces 62 and the second surfaces 64 are connected perpendicular or substantially perpendicular to the shoulders 54. The first surfaces 62 are also connected to the second surfaces 64 and the third surfaces 66. The second surfaces 64 are connected to the first surfaces 62 and third surfaces 66. The third surfaces 66 connect the first surfaces 62 and the second surfaces 64 to either the second side 26 or the fourth side 30. In Figure 4, the third surfaces 66 are extending up from the second side 26 in a curved or dome-like fashion to meet with the upper edges of the first surfaces 62 and the second surfaces 64. Edges of the surfaces or intersections between the surfaces and the other surfaces, sides or shoulders can be rounded or angular.

An intermediate strip 70 of the second side 26 and the fourth side 30 can optionally extend between the pairs of projections 60. A lateral strip 72 of the second side 26 and the fourth side 30 can optionally extend between each pair of the projections 60. In the embodiment illustrated in Figures 3 and 4, the lateral strips 72 have faces 74 extending to the shoulders 54.

Each one of the first surfaces 62 of the four projections 60 in the first pair 42 of upsets 40 has a first edge that intersects with an edge portion 56 of the first side 24 and the third side 28. As seen in Figure 3, the first side 24 has two edge portions 56. Similarly, the third side 28 has two edge portions 56. Each one of the four first surfaces 62 of the upsets 40 in the first pair 42 incline

13 NOV 1997

or slope away from a respective one of the edge portions 56 towards, and at a first angle with respect to, the first mid-plane. Each one of the four first surfaces 62 of the upsets 40 in the first pair 42 have a second edge that intersects a first edge of the second surfaces 64.

Each one of the second surfaces 64 of the upsets 40 in the first pair 42 incline or slope away from the first surfaces 62 and the first mid-plane at a second angle with respect to the first mid-plane. Preferably, the second angle is less than the first angle. The second surfaces 64 may even be parallel to the first mid-plane. Each one of the second surfaces 64 of the upsets 40 in the first pair 42 intersects in a curved or rounded fashion one of the faces 74 of the lateral strips 72 between the first pair of projections 60 and the second pair of projections 60.

Each one of the four third surfaces 66 of the upsets 40 in the first pair 42 connect to distal edges of the first surfaces 62 and the second surfaces 64. Each one of the third surfaces 64 extends in a curved or globe-like fashion and intersects either the second side 26 or the fourth side 30 in a curved line.

The other projections 60 in the second, third and fourth pair of upsets 40 are configured like the afores-described projections 60 in the first pair 42 of upsets 40. However, the first edge of the first surfaces 62 in the projections 60 in the second, third and fourth pair of upsets 40 intersect one of the faces 74, rather than the edge portion 56. Further, the second surfaces 64 of the projections 60 in the fourth pair 48 of upsets 40 connect to a ledge 58, rather than the face 74. There are four ledges 58. Each one of the ledges 58 is defined by one of the the second surfaces 64 of the projections 60 in the fourth pair 48 of upsets 40, one of the four shoulders 54, either the first side 24 or the third side 28, and either the second side 26 or the fourth side 30.


13 NOV 1997

The opposed upsets 40 are made by squeezing or pinching the edge portions 56 of the first side 24 and the third side 28 towards one another.

The contact elements 10 of the present invention can be made from any suitable metal used for electrical terminals, such as brass, phosphor bronze, beryllium copper and the like. The contact elements 10 may be plated or coated with one or more conductive layer, such as tin, nickel, pladium, gold, silver or a suitable alloy.

The retention portion 16 is for staking in and mechanical connection to a hole 80 through a connector housing. Figure 6 is a schematic representation of a preferred embodiment of a substantially oblong hole 80 through a connector housing for receiving the electrical contact element of Figure 1. The substantially oblong hole 80 has two opposed flat and parallel walls 82. The flat walls 82 are connected by cylindrical or curved walls 84 which can be parts of a same cylinder 86. Preferably, only the retention portion 16 contacts the hole wall(s) 82, 84 in the housing. This is accomplished by inserting the element 10 into the substantially oblong hole 80 such that only the upsets 40 contact the flat walls 82 in the hole geometry depicted in Figure 6. This provides clearance between the element 10 and the housing which avoids scraping corners 22 of the element 10 on the housing and eliminates or significantly reduces sliver formation. This hole geometry is also better for injection molding of the housing than round or square holes.


Figure 7 a top side view of a connector housing and, specifically, a header housing for receiving a plurality of the electrical contact elements 10 of the present invention staked in oblong holes 80 through the header hous-

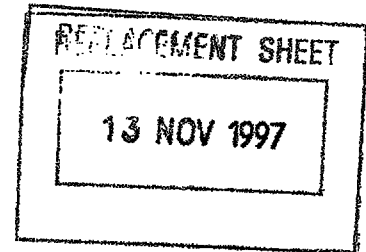

ing 90. Figure 8 a right side view of a connector and, more specifically, a header 100 comprising a plurality of the electrical contact elements 10 of Figure 1 in the header housing 90 of Figure 7 taken on the line 8-8 in the direction of the arrows. In Figure 8, a portion of the housing 90 has been broken away to clearly show columns of the insertion end portions 14 of the electrical contact elements 10. Figure 9 a cross sectional view of the header housing 90 of Figure 7 taken on the line 9-9 in the direction of the arrows combined with the electrical contact elements 10 of Figure 1. Figure 9 illustrates four rows of the the electrical contact elements 10 in the housing 90.

Preferably, the housing 90 is made of or from a high temperature resin, such as, polyphenylene sulfide resin.

Those skilled in the art, having the benefit of the teachings of the present invention as hereinabove set forth, can effect numerous modifications thereto. These modifications are to be construed as being encompassed within the scope of the present invention as set forth in the appended claims.

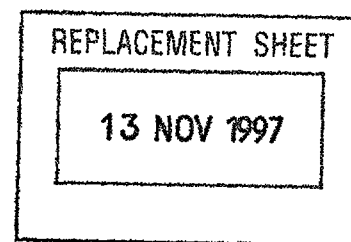

Claims

1. A retention portion (16) of an electrical contact element (10) for mechanical connection in a hole (80) through a connector housing, the retention portion (16) having a first end and a second end, comprising:


a plurality of opposed upsets (40) located on the retention portion,

whereby when the element (10) is inserted into the hole (80) such that only the upsets (40) come in contact with a wall of the hole when inserted herein, said upsets (40) provide an interference with the hole (80) during insertion,

characterized in that

said opposed upsets (40) are arranged in pairs (42, 44, 46, 48) with their size progressively increasing as said pairs (42, 44, 46, 48) are located away from said first end and towards said second end so that the upsets (40) provide an incremental interference with the hole (80) during insertion while substantially preventing sliver formation.

2. The retention portion of claim 1, wherein the hole (80) is substantially oblong.
3. The element of claim 2, wherein the hole has two opposed flat sides (82).

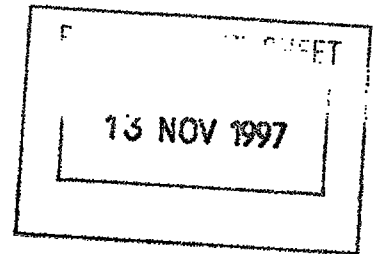

4. The retention portion of claim 1, wherein:

there are at least three pairs (42, 44, 46, 48) of opposed upsets (40), said opposed upsets (40) having distal tips (50); and

a distance between said distal tips (50) of the upsets (40) in the pairs of opposed upsets incrementally increases as said opposed upsets are located away from said proximal end of the retention portion (16) towards said distal end of the retention portion.

5. The retention portion of claim 1, wherein each one of the upsets (40) comprises:


a pair of projections (60), each one of the projections having a first surface (62), a second surface (64) and a third surface (66).

6. The retention portion of claim 5, further comprising:

a first side (24) having a mid-portion (52) and edge portions, a second side (26) having an intermediate strip (70), a third side (28) having a mid-portion (52) and edge portions and a fourth side (30) having an intermediate strip (70);

shoulders (54) extending from the mid-portions (52) of the first and third sides (24, 28);

the first and second surfaces (62, 64) connected perpendicular or substantially perpendicular to the shoulders (54); and

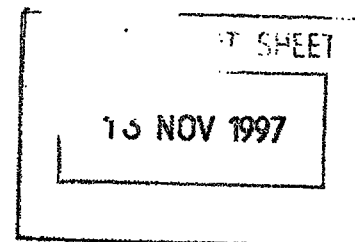

the third surfaces (66) being dome shaped and connected between the first surfaces (62), the second surfaces (64) and either the intermediate strip (70) of the second side (26) or the intermediate strip (70) of the fourth side (30).

7. The retention portion of claim 6, wherein:


the first surfaces (62) of a first insertion pair (42) of the opposed upsets (40) have first edges that intersect with the edge portions of the first and third sides (24, 28); and

the second surfaces (62) of a last insertion pair (48) of the opposed upsets (40) connect to ledges, the ledges being defined by one of the second surfaces (62) of the projections (60) in the last insertion pair of (48) opposed upsets (40), one of the shoulders (54), either the first side (24) or the third side (28), and either the second side (26) or the fourth side (30).

8. The retention portion of claim 6, wherein:

the second side (26) and the fourth side (30) further have lateral strips which (72) extend between each pair of the projections (60); and

faces (74) connect the lateral strips to the shoulders.

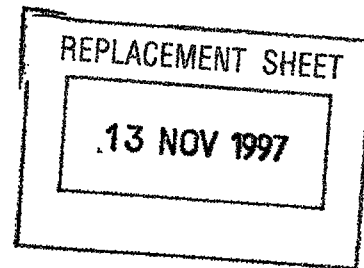

9. The retention portion of claim 8, wherein:

the first surfaces (62) of any pair of the opposed upsets (40) between the first insertion pair (42) of the opposed upsets and the last insertion pair (48) of the opposed upsets have first edges that intersect with the faces (74);

the second surfaces (64) of all pairs of the opposed upsets (40), except the last insertion pair (48) of the opposed upsets, have second edges that intersect with the faces; and

the second surfaces (64) of a last insertion pair (48) of the opposed upsets connect to ledges (58), the ledges being defined by one of the second surfaces of the projections in the last insertion pair (48) of opposed upsets, one of the shoulders (54), either the first side or the third side, and either the second side or the fourth side.

10. An electrical contact element (10) for mechanical connection in a hole (80) through a connector housing (90) comprising:

a force receiving end portion (12);

an insertion end portion (14); and

a retention portion (16) according to any one of claims 1 to 9 between the force receiving end portion (12) and the insertion end portion (14).

11. The electrical contact element of claim 10, wherein



the element comprises a pin having a substantially square cross section and the upsets (40) extend only beyond two opposed sides (26, 30) of the pin.


12. An electrical connector comprising:

a housing (90) having a plurality of holes (80) arranged in rows and columns; and

an electrical contact element according to claim 10 or 11.

13. The electrical connector of claim 12, wherein the connector is a header (100).

14. The electrical connector of claims 12 or 13, wherein the housing is made from polyphenylene sulfide resin.

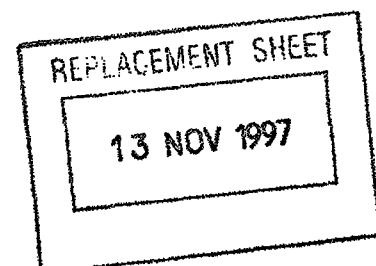

13 NOV 1997

1

FIG. 1

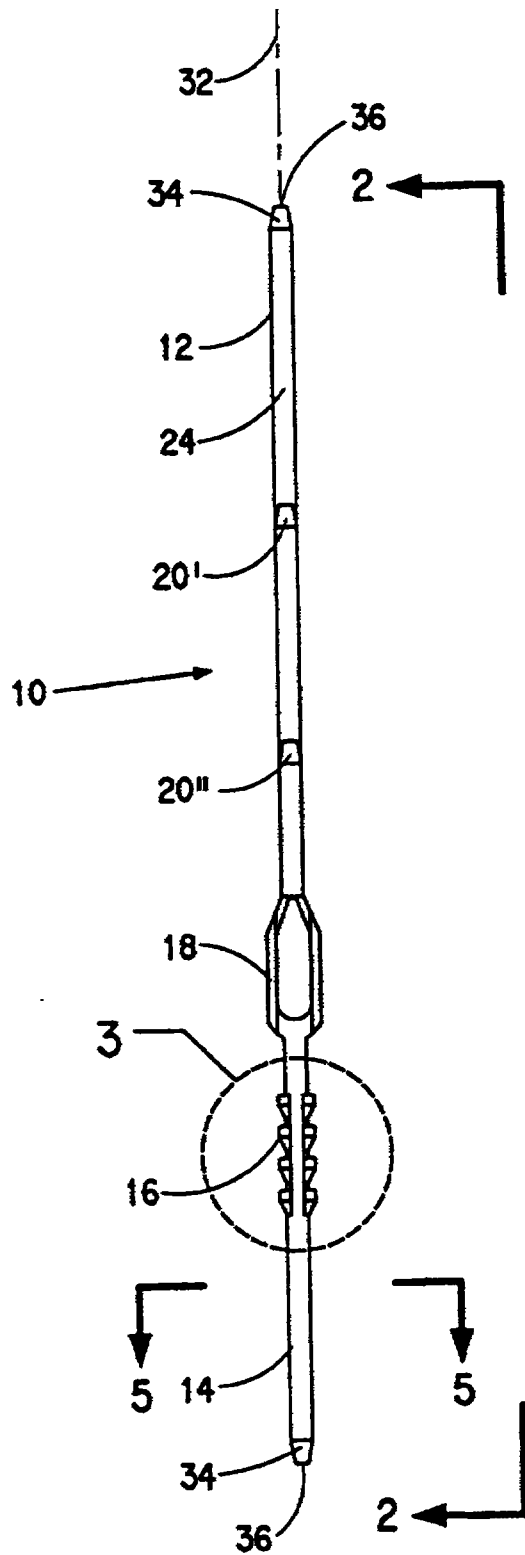


FIG. 2

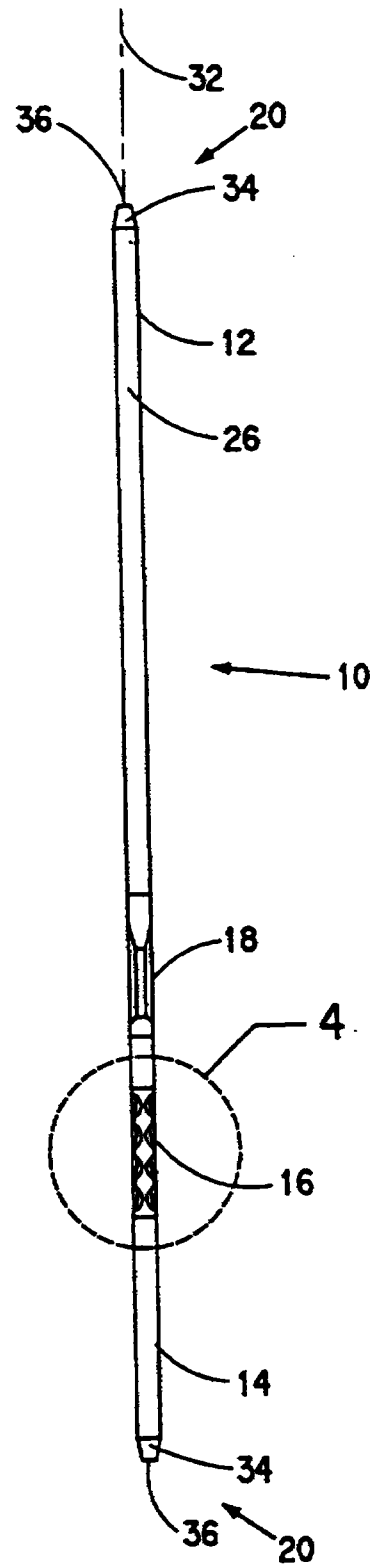


FIG.3

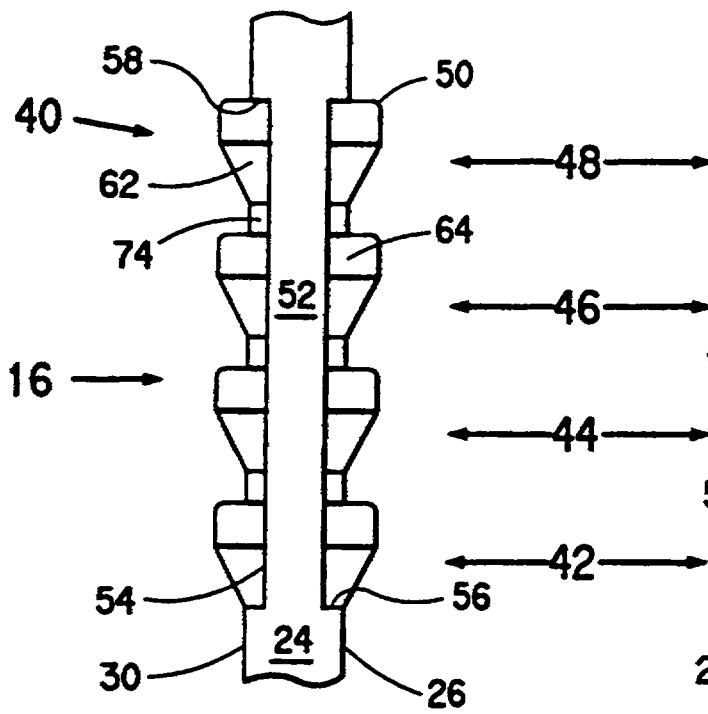


FIG.4

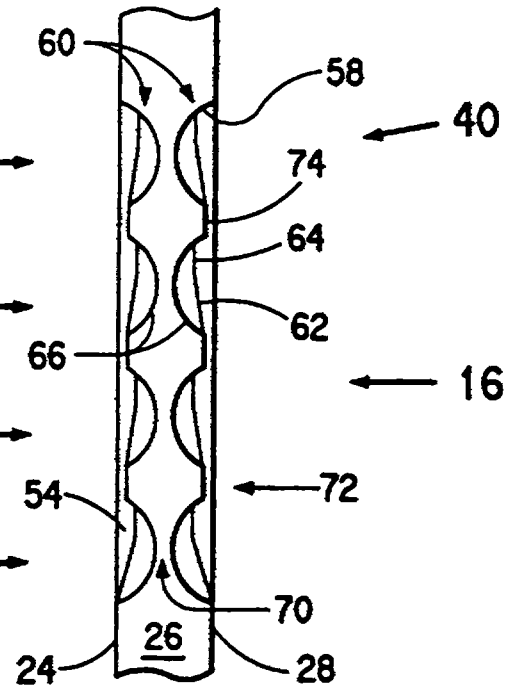


FIG.5

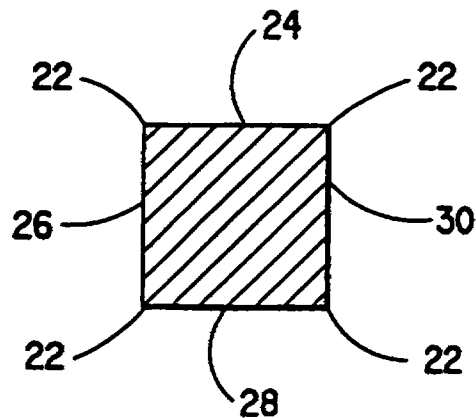


FIG.6

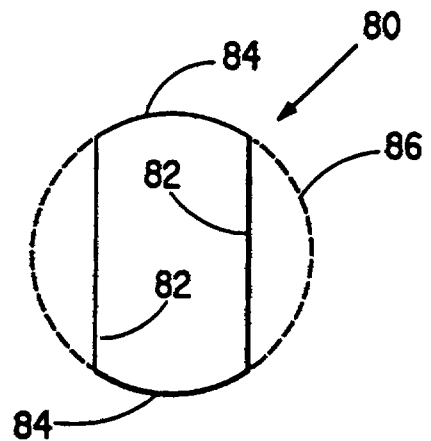


FIG. 9

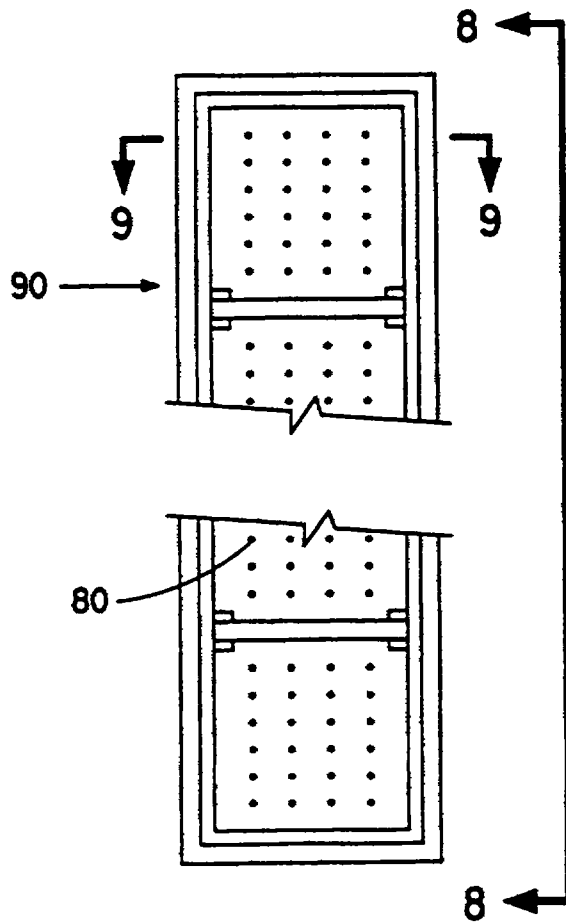
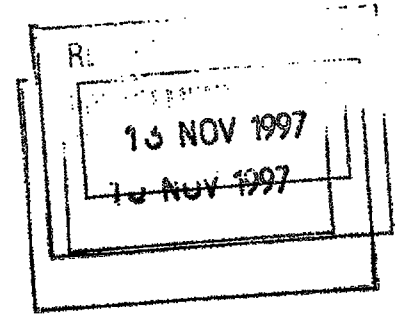
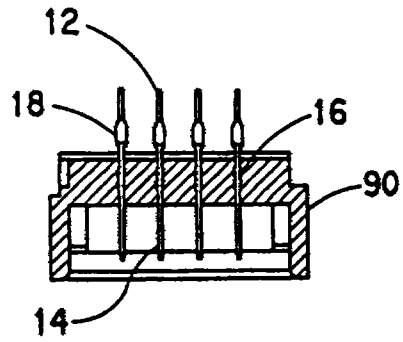


FIG. 7

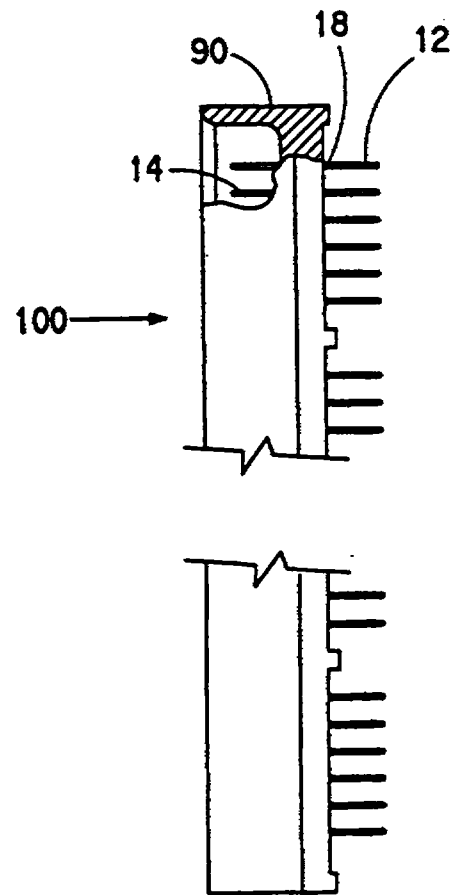


FIG. 8

TITLE OF THE INVENTION
CONNECTOR, CIRCUIT BOARD CONTACT ELEMENT
AND RETENTION PORTION

ABSTRACT OF THE DISCLOSURE

The present invention relates to circuit board contact elements and compliant sections thereof which are mounted in plated-through holes in printed circuit boards, generally in conjunction with a plastic header or other electrical connectors.

FIGURE 1.

