

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 April 2005 (28.04.2005)


PCT

(10) International Publication Number
WO 2005/036941 A3

- (51) International Patent Classification⁷: **H01Q 15/00**, H04K 3/0
- (74) Agent: **LOWY, Avi**; P. O. Box 6202, 10A Elhanan Street, 31061 Haifa (IL).
- (21) International Application Number: PCT/IL2004/000913
- (22) International Filing Date: 4 October 2004 (04.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
158468 19 October 2003 (19.10.2003) IL
- (71) Applicant (for all designated States except US): **RAFAEL ARMAMENT DEVELOPMENT AUTHORITY LTD.** [IL/IL]; P.O. Box 2250, Akko Road, 31021 Haifa (IL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WEISBROD, Gil** [IL/IL]; P.O. Box 2250, Akko Road, 31021 Haifa (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (81) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: PARACHUTED RADAR DECOY

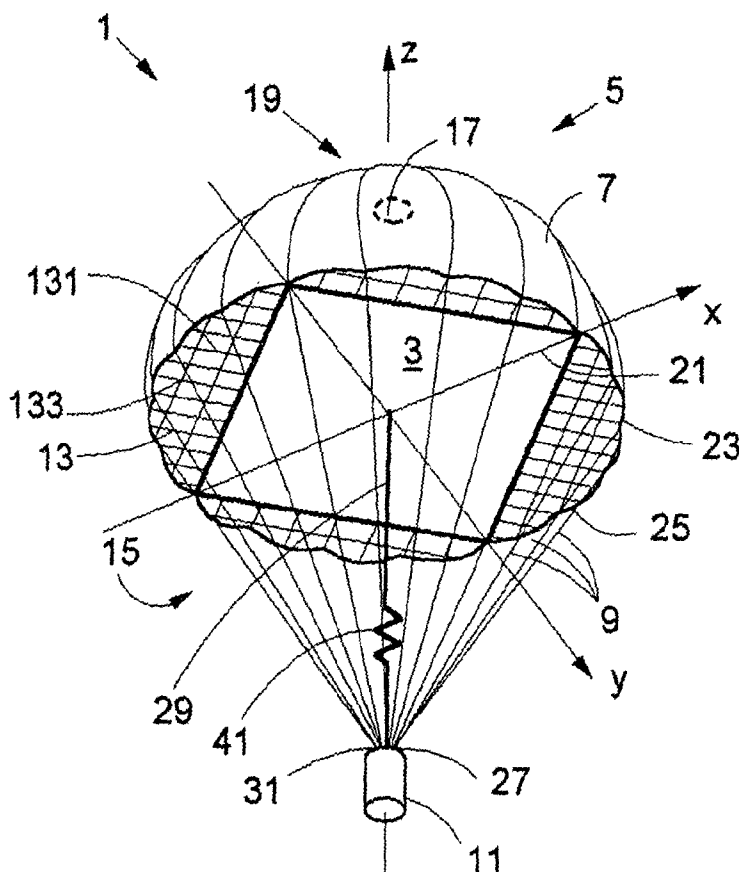

(57) Abstract: A radar decoy (1) having radar reflectors (3) disposed in the interior of the inflated canopy (7) of a descending parachute (5) as a first set of four corner reflectors, and a second set of corner reflectors disposed on the exterior of the canopy integral with the first set of corner reflectors, to form an octahedron of eight corner reflectors. The radar decoy is pliable and folded with the parachute for stowage in the interior of a canister. When loaded on a vehicle (V) flying in a trajectory (T), the canister may open at a point P on the trajectory, to release the parachute, and thereby deploy the radar decoy to become operative.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:

10 November 2005

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.