

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



20/5/03
200101558-5


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(1) International Patent Classification 7 : B32B 15/04, 31/20, B30B 15/22 // E04C 2/292		(11) International Publication Number: WO 00/18576
A1		(43) International Publication Date: 6 April 2000 (06.04.00)
(31) International Application Number: PCT/FI99/00808		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 30 September 1999 (30.09.99)		
(30) Priority Data: 982123 30 September 1998 (30.09.98) FI		
(71) Applicant (for all designated States except US): PAROC GROUP OY AB [FI/FI]; Neilikkatie 17, FIN-01300 Vantaa (FI).		
(72) Inventors; and (75) Inventors/Applicants (for US only): WILLMAN, Tarmo [FI/FI]; Laskuttajankatu 16, FIN-20780 Kaarina (FI). HESELIUS, Lars-Henrik [FI/FI]; Kullasgränd, FIN-21600 Pargas (FI). BRUNILA, Esko [FI/FI]; Pihlajatie 13, FIN-21600 Parainen (FI).		
(74) Agent: OY JALO ANT-WUORINEN AB; Iso Roobertinkatu 4-6 A, FIN-00120 Helsinki (FI).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Finnish).




162162

(54) Title: LAMINATING APPARATUS

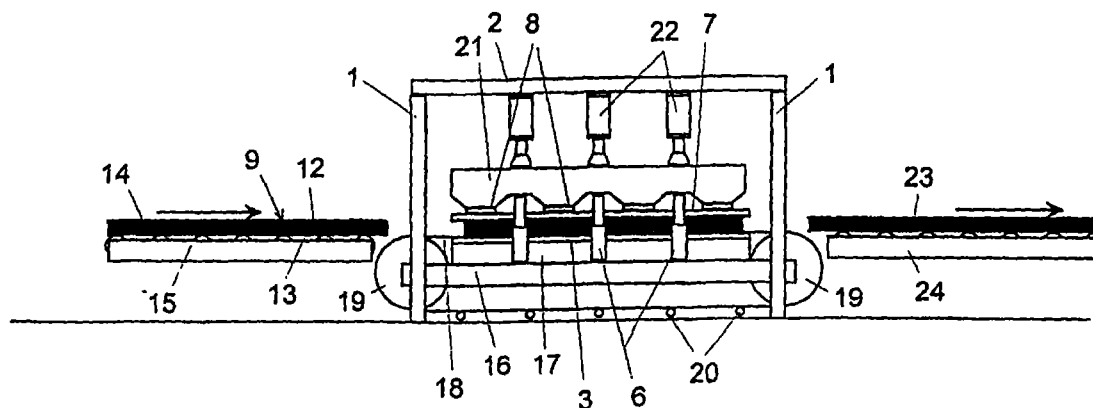

(57) Abstract

The invention relates to a method and an apparatus for joining surface layers and a core to form an element between two press platens, at least one of which is flexible and acted on by several power units that can be adjustable individually or in groups.



G00000