



(51) International Patent Classification:
G06Q 10/06 (2012.01) *H04M 3/22* (2006.01)
G06Q 10/10 (2012.01)

(21) International Application Number:
PCT/US2020/029723

(22) International Filing Date:
24 April 2020 (24.04.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/838,522 25 April 2019 (25.04.2019) US

(71) Applicant: **LIVEPERSON, INC.** [US/US]; 475 10th Avenue, 5th Floor, New York, New York 10018 (US).

(72) Inventors: **LAHAV, Shlomo**; 475 10th Avenue, 5th Floor, New York, New York 10018 (US). **GRUENDLINGER,**

Leor; 475 10th Avenue, 5th Floor, New York, New York 10018 (US). **RON, Ofer**; 475 10th Avenue, 5th Floor, New York, New York 10018 (US). **COHEN, Yehiel**; 475 10th Avenue, 5th Floor, New York, New York 10018 (US). **SHAKED, Liran**; 475 10th Avenue, 5th Floor, New York, New York 10018 (US).

(74) Agent: **LEZAK, Arrienne M.** et al.; POLSINELLI LLP, 1661 Page Mill Road, Suite A, Palo Alto, California 94304 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: SMART CAPACITY FOR WORKLOAD ROUTING

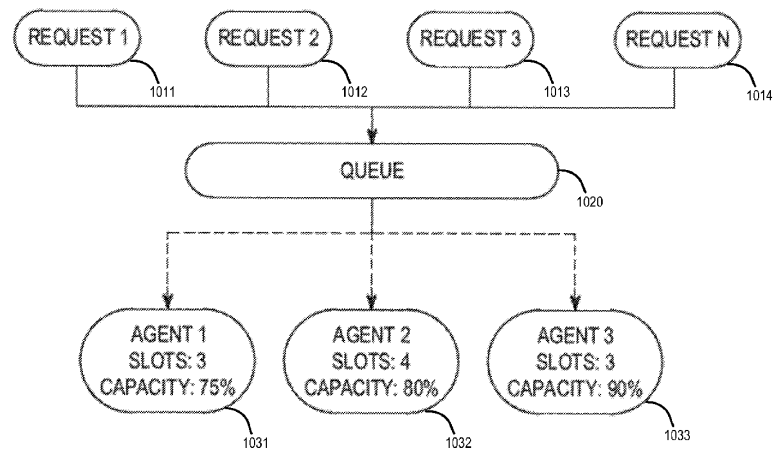


FIG. 10

(57) Abstract: Examples are described of smart capacity workload routing. One example involves storing a workload model in memory regarding a set of different factors associated with user communications, with each factor is associated with a measurement of workload. A received request including information regarding one or more of the factors is process and used in identifying a workload measurement for the requested user communication based on comparing the received request information to the stored workload model, and identifying an agent with capacity that is available to handle the requested user communication. A communication slot for the identified agent is activated and defined by the identified workload measurement. The request is then routed to the identified agent and updating available workload capacity in the system.

[Continued on next page]

SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*