

(19) World Intellectual Property Organization
International Bureau



G00002



(43) International Publication Date
30 May 2002 (30.05.2002)


PCT

(10) International Publication Number
WO 02/043415 A3

- (51) International Patent Classification⁷: **H04Q 7/22, 7/30** (74) Agents: **DICHIARA, Peter, M.** et al, Hale and Dorr LLP, 60 State Street, Boston, MA 02109 (US)
- (21) International Application Number: PCT/US01/43365
- (22) International Filing Date:
21 November 2001 (21.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/721,329 22 November 2000 (22.11.2000) US
- (71) Applicant: **WINPHORIA NETWORKS, INC.**
[US/US]; 3 Highland Drive, Tewksbury, MA 01876 (US)
- (72) Inventors: **NAQVI, Shamim, A.**, 19 Spring Valley Road, Morristown, NJ 07960 (US) **VISHWANATHAN, Kumar, K.**, 6 Squire Armour Road, Windham, NH 03087 (US) **SUNDAR, Rangamani**, 5 Squire Armour Road, Windham, NH 03087 (US). **ARAVAMUDAN, Murali**, 3 Squire Armour Road, Windham, NH 03087 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- Published:
— with international search report
- (88) Date of publication of the international search report:
6 February 2003

[Continued on next page]

162162) Title: SYSTEM AND METHOD OF SERVICING MOBILE COMMUNICATIONS WITH A PROXY SWITCH

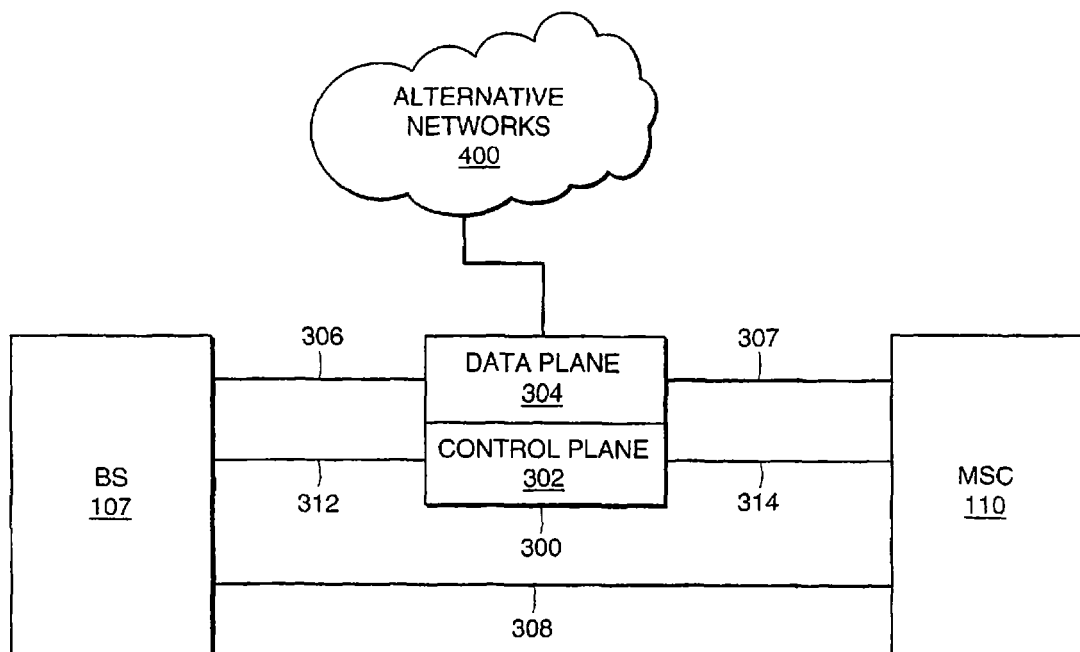


(57) Abstract: A proxy switch, communication methods, and communication logic for use in a mobile network are described. A proxy switch is deployed between a base station subsystem and a mobile switching center. It receives signaling messages and either retransmits them, blocks them, converts them, or siphons them to an alternative network. Besides providing an ability to offload mobile traffic it provides a platform for new communication services.

WO 02/043415 A3

A2

WO 02/043415 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette