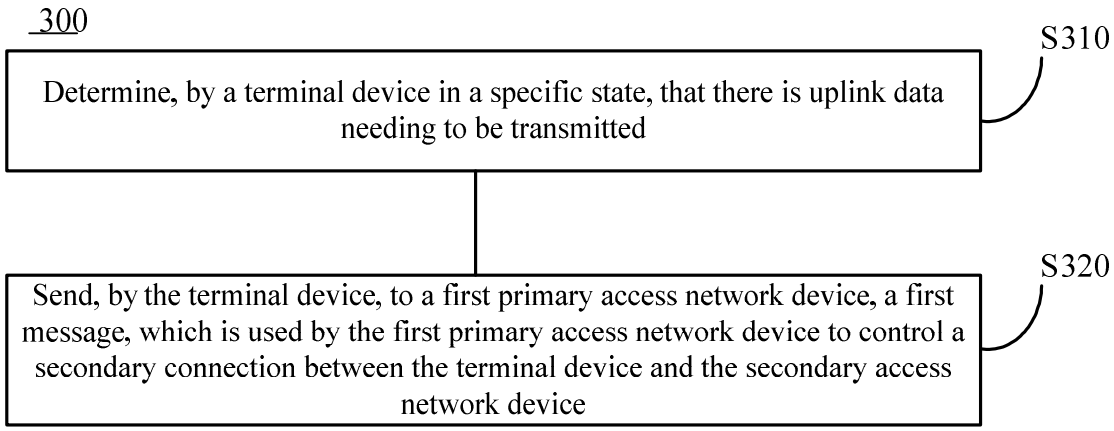
300
S310
Determine, by a terminal device in a specific state, that there is uplink data needing to be transmitted
S320
Send, by the terminal device, to a first primary access network device, a first message, which is used by the first primary access network device to control a secondary connection between the terminal device and the secondary access network device

FIG. 3

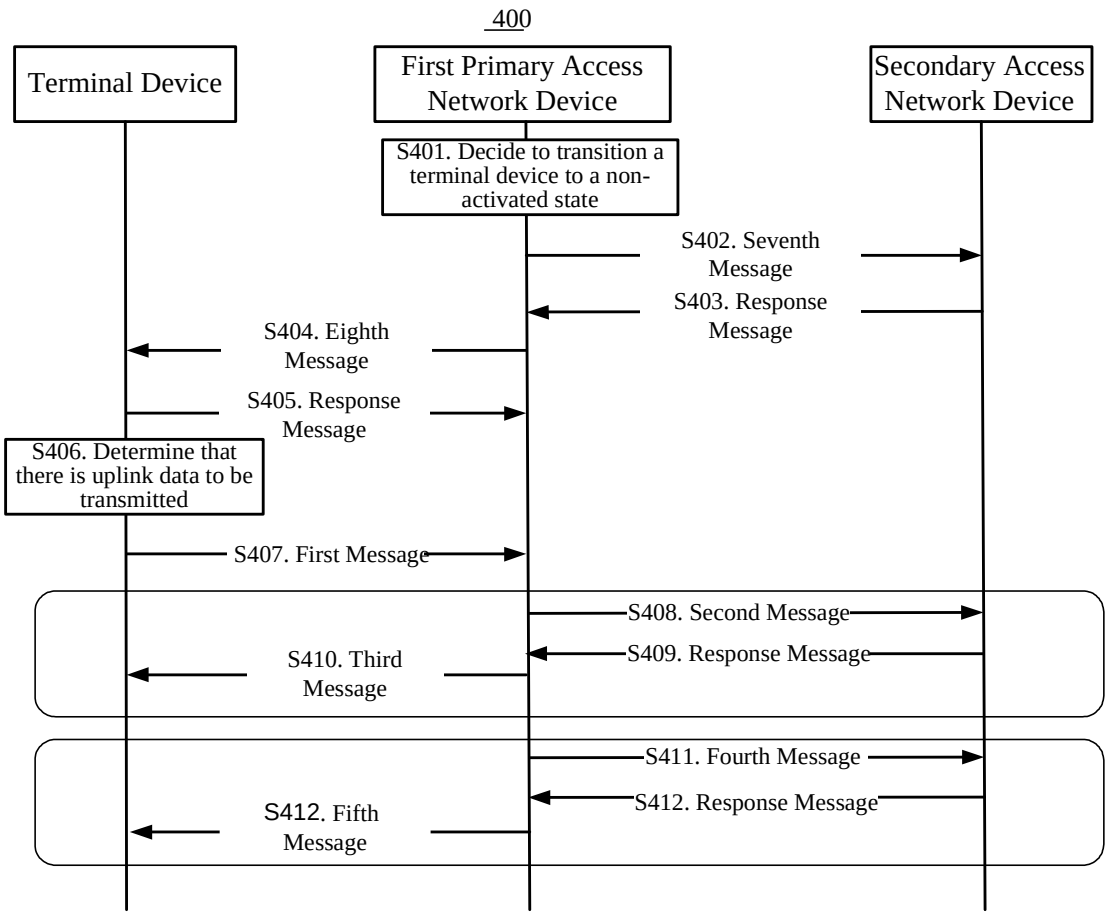
400
Terminal Device
First Primary Access Network Device
Secondary Access Network Device
S401. Decide to transition a terminal device to a non-activated state
S402. Seventh Message
S403. Response Message
S404. Eighth Message
S405. Response Message
S406. Determine that there is uplink data to be transmitted
S407. First Message
S408. Second Message
S409. Response Message
S410. Third Message
S411. Fourth Message
S412. Response Message
S412. Fifth Message

FIG. 4