



(51) International Patent Classification:
B65F 5/00 (2006.01)

(21) International Application Number:
PCT/FI2011/050132

(22) International Filing Date:
14 February 2011 (14.02.2011)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20105160 18 February 2010 (18.02.2010) FI

(71) Applicant (for all designated States except US): **MARICAP OY** [FI/FI]; Pohjantähdentie 17, FI-01450 Vantaa (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MONTONEN, Jan** [FI/FI]; Laajasalonkaari 8 A, FI-00840 Helsinki (FI).
SEERE, Daniel [FI/FI]; Peuratie 6 A, FI-01450 Vantaa

(FI). **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FI-04310 Tuusula (FI).

(74) Agent: **HEINÄNEN OY**; Äyritie 8 D, FI-01510 Vantaa (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,

[Continued on next page]

(54) Title: METHOD AND APPARATUS IN PNEUMATIC MATERIAL CONVEYING SYSTEM

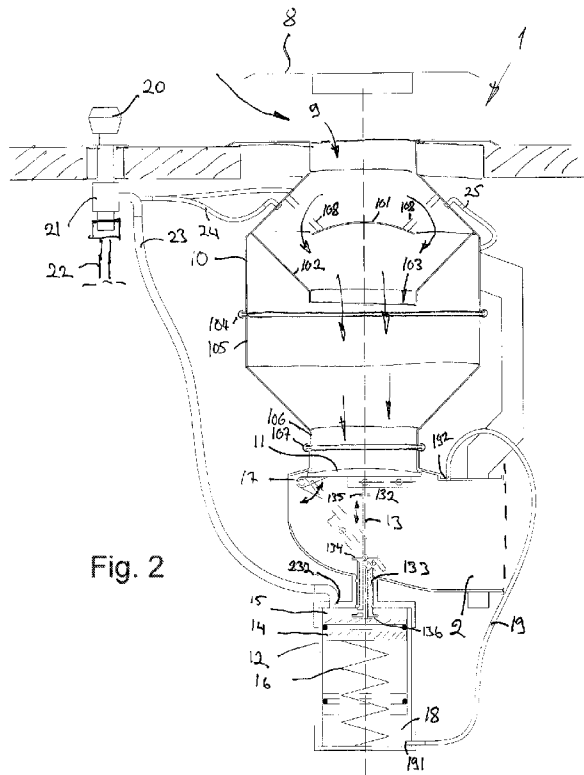


Fig. 2

(57) Abstract: Method in a pneumatic material conveying system, such as in a waste conveying system, which conveying system comprises at least one input point (1) of material, more particularly of waste material, a material conveying pipe (2, 3), which can be connected to an input point (1), and a separating device (4), in which the material to be transferred is separated from the conveying air, and also means (5) for achieving a pressure difference in the conveying pipe (2, 3) at least during transfer of material. The actuator (12) of the valve means (11, 300, 400) arranged between an input point (1) and the conveying piping (2, 3) is driven and/or controlled with water to be conducted from the water mains network (22).



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

Declarations under Rule 4.17: