

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 January 2002 (10.01.2002)

PCT

(10) International Publication Number
WO 02/03415 A2

(51) International Patent Classification⁷: **H01J 37/00**

Richard, A. [US/US]; 4990 Lapis Lane, Pleasanton, CA 94566 (US). **STEGER, Robert, J.** [US/US]; 2240 Homestead Court #307, Los Altos, CA 94024 (US).

(21) International Application Number: PCT/US01/18623

(22) International Filing Date: 8 June 2001 (08.06.2001)

(74) **Agent: VILLENEUVE, Joseph, M.**; Beyer Weaver & Thomas, LLP, 2030 Addison Street, 7th Floor, P.O. Box 778, Berkeley, CA 94704 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/607,599 30 June 2000 (30.06.2000) US

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) **Applicant (for all designated States except US): LAM RESEARCH CORPORATION** [US/US]; 4650 Cushing Parkway, Fremont, CA 94538 (US).


(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

(72) **Inventors; and**

(75) **Inventors/Applicants (for US only): GOTTSCHO,**

[Continued on next page]

(54) **Title:** SWITCHED UNIFORMITY CONTROL

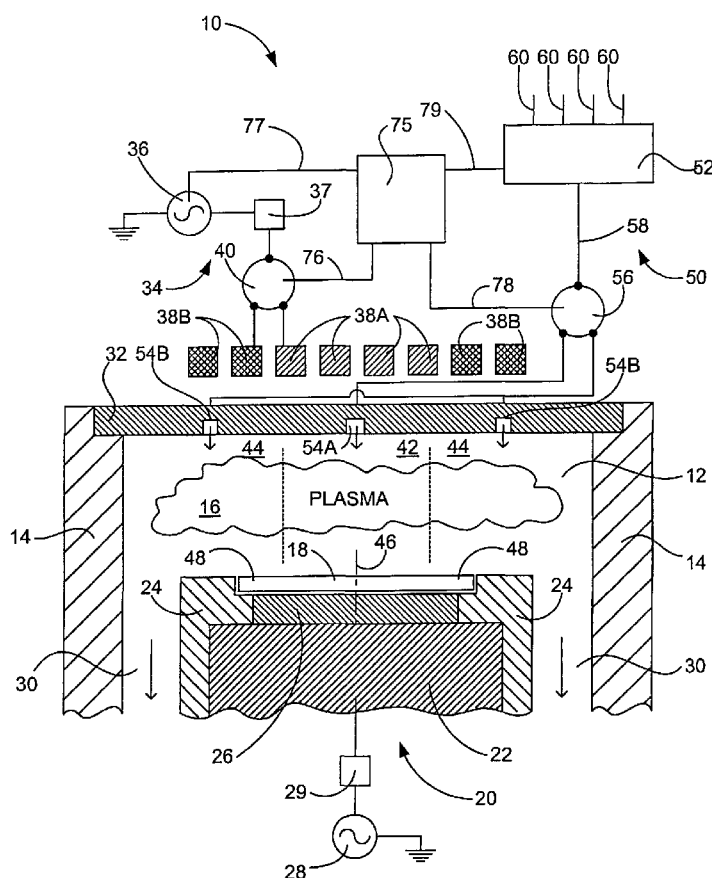

(57) **Abstract:** A component delivery mechanism for distributing a component inside a process chamber is disclosed. The component is used to process a work piece within the process chamber. The component delivery mechanism includes a plurality of component outputs for outputting the component to a desired region of the process chamber. The component delivery mechanism further includes a spatial distribution switch coupled to the plurality of component outputs. The spatial distribution switch is arranged for directing the component to at least one of the plurality of component outputs. The component delivery mechanism also includes a single component source coupled to the spatial distribution switch. The single component source is arranged for supplying the component to the spatial distribution switch.

WO 02/03415 A2



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*