



2001003483



PCT

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

International Patent Classification⁶ :

A47C 7/18

A1

(11) International Publication Number:

WO 00/02470

(43) International Publication Date:

20 January 2000 (20.01.00)

(21) International Application Number: PCT/FI99/00621

(22) International Filing Date: 13 July 1999 (13.07.99)

(30) Priority Data:
U980340 13 July 1998 (13.07.98) FI

(71) Applicant (for all designated States except US): EASYDOING OY [FI/FI]; Sahalantie 41, FIN-77700 Rautalampi (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): JALKANEN, Veli-Jussi [FI/FI]; Sahalantie 41, FIN-77700 Rautalampi (FI).

(74) Agent: PITKÄNEN, Hannu; Savilahdentie 6 L 3, FIN-70210 Kuopio (FI).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

In English translation (filed in Finnish).




162162



Gnnnn

(54) Title: SADDLE CHAIR

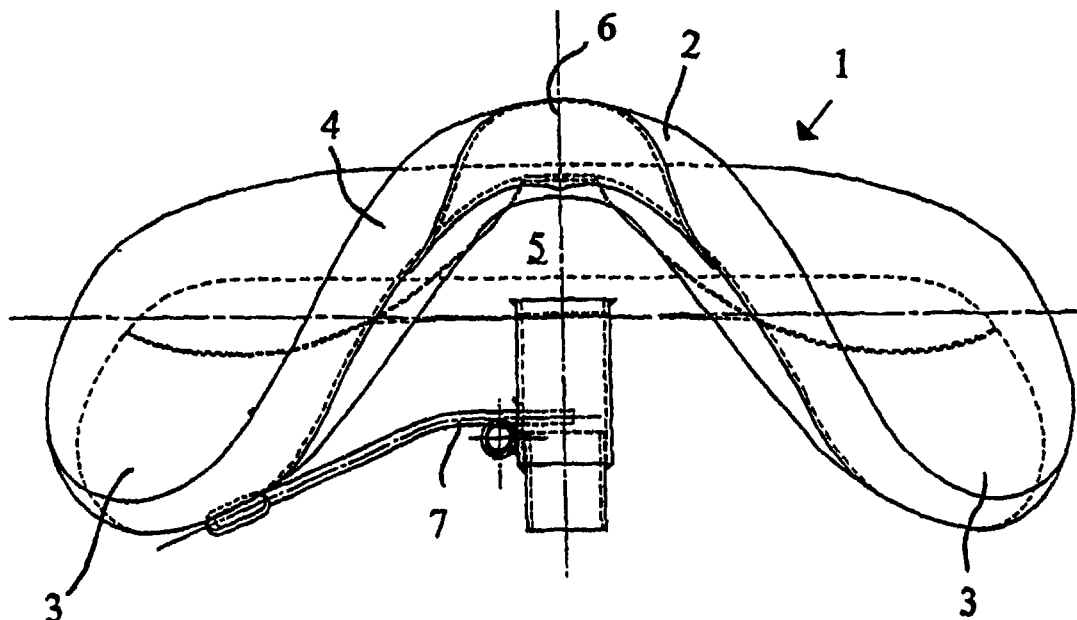

(57) Abstract

The invention relates to a saddle chair which comprises a seat (1) which has a rounded center part (2), and side parts (3) which at least partially curve downwards at an angle from the center part in order to support the pelvis and thigh muscle of the seated person, said side parts (3) having front edges (4) which are at diagonal angles to one another and between them is formed a space (5). On a saddle chair formed in accordance with the invention, the central edge section of the front edges (4) of the seat are curved backwards at an angle towards the center part of the seat (1) in order to form a space in between the edges which extends backwards.