



(51) International Patent Classification:

H04B 7/06 (2006.01) H04W 72/04 (2009.01)
H04W 76/19 (2018.01)

(21) International Application Number:

PCT/SG2020/050714

(22) International Filing Date:

03 December 2020 (03.12.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

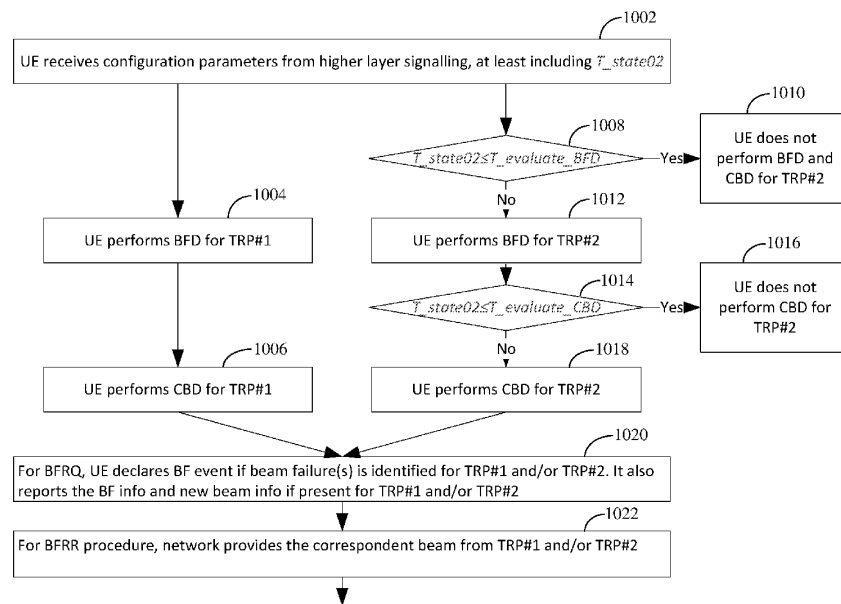
10202001583T 22 February 2020 (22.02.2020) SG

(71) Applicant: PANASONIC INTELLECTUAL PROPERTY CORPORATION OF AMERICA [US/US]; 20000

Mariner Avenue, Suite 200, Torrance, California 90503 (US).

(72) Inventors: **TRAN, Xuan Tuong**; c/o Panasonic R&D Center Singapore, 202 Bedok South Avenue 1 #02-11, Singapore 469332 (SG). **SUZUKI, Hidetoshi**; c/o Panasonic Corporation, 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP). **HUANG, Lei**; c/o Panasonic R&D Center Singapore, 202 Bedok South Avenue 1 #02-11, Singapore 469332 (SG). **KOH, Tien-Ming Benjamin**; c/o Panasonic R&D Center Singapore, 202 Bedok South Avenue 1 #02-11, Singapore 469332 (SG). **KANG, Yang**; c/o Panasonic R&D Center Singapore, 202 Bedok South Avenue 1 #02-11, Singapore 469332 (SG). **NISHIO, Akihiko**; c/o Panasonic Corporation, 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP). **OGAWA, Yoshihiko**; c/o Panasonic Corporation, 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(54) Title: BEAM FAILURE RECOVERY FOR SINGLE DCI-BASED M-TRP URLLC TRANSMISSIONS

**FIG. 10**

(57) **Abstract:** Apparatuses and systems for providing multiple structures to enable flexibility of a multiple multiple transmission and reception point ultra-reliable low-latency communication (M-TRP URLLC) operation and reduce measurement effort and power consumption from a transceiving apparatus such as a UE are provided. The techniques disclosed here feature a transceiving apparatus including a transceiver and circuitry. The transceiver, in operation, receives signals from multiple transmission and reception points (M-TRPs) in a network on at least physical downlink shared channels (PDSCHs). The circuitry, in operation, performs beam failure recovery (BFR) by evaluating beam failure detection (BFD) and candidate new beam detection (CBD) for the signals from at least a first one of the M-TRPs. The signals from the first one of the M-TRPs comprise signals received on a physical downlink control channel (PDCCH), and the circuitry determines to skip evaluation of one or both of the BFD and the CBD for one or more additional ones of

[Continued on next page]

(74) **Agent: SPRUSON & FERGUSON (ASIA) PTE LTD;**
P.O. Box 1531, Robinson Road Post Office, Singapore
903031 (SG).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*
— *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*