

(2006024533)

12.04.06

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/064482 A1

(51) International Patent Classification⁷: **G06F 13/40**

(74) Agents: **VICTOR, David, W.** et al.; Konrad, Raynes, Victor & Mann, 315 South Beverly Drive, Suite 210, Beverly Hills, CA 90212 (US).

(21) International Application Number:
PCT/US2004/040418

(22) International Filing Date: 1 December 2004 (01.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/741,460 18 December 2003 (18.12.2003) US

(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventor; and


(75) Inventor/Applicant (for US only): **SETO, Park-Lung** [US/US]; 118 Walnut Street, Shrewsbury, MA 01545 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: MULTIPLE INTERFACES IN A STORAGE ENCLOSURE

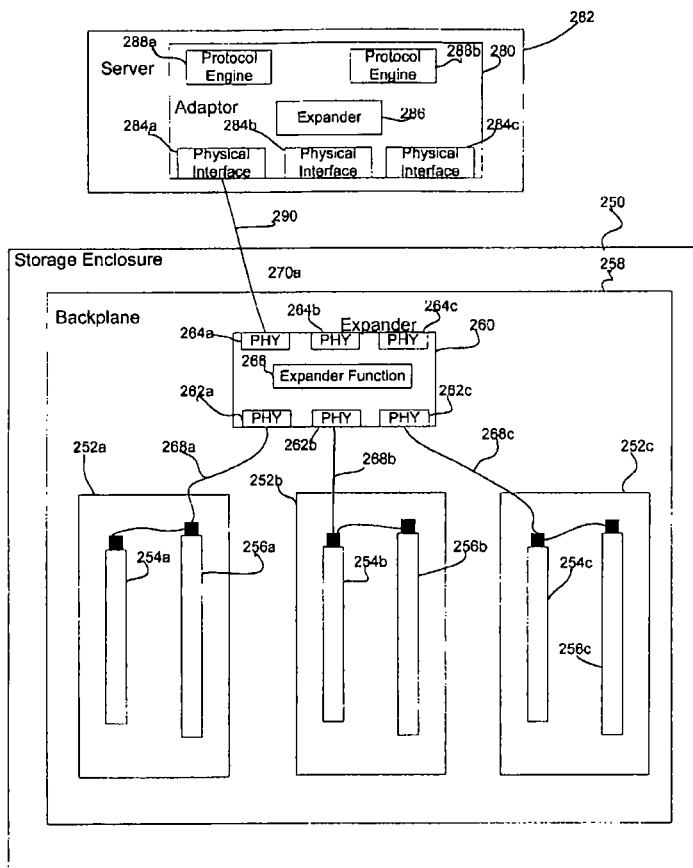

(57) Abstract: Provided is a system for interfacing with storage units, including a backplane, at least one slot in the storage enclosure for receiving one storage unit, and two physical interfaces on the backplane for at least one slot. The storage unit is capable of being positioned in the slot to mate with one of the two physical interfaces for the slot, wherein each physical interface supports different storage interconnect architectures.



162162



ACTION

WO 2005/064482 A1

WO 2005/064482 A1

FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*