

(43) International Publication Date
8 July 2010 (08.07.2010)(10) International Publication Number
WO 2010/077352 A1(51) International Patent Classification:
C10G 47/00 (2006.01)(21) International Application Number:
PCT/US2009/006738(22) International Filing Date:
30 December 2009 (30.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/201,851 16 December 2008 (16.12.2008) US
12/655,128 23 December 2009 (23.12.2009) US(71) Applicant (for all designated States except US):
EXXONMOBIL RESEARCH AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, P. O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SCHLEICHER, Gary, P.** [US/US]; 7 Meadow Run Road, Milford, NJ 08848 (US).(74) Agents: **BAKUN, Estelle, C.** et al.; Exxonmobil Research And Engineering Company, 1545 Route 22 East, P. O. Box 900, Annandale, NJ 08801-0900 (US).

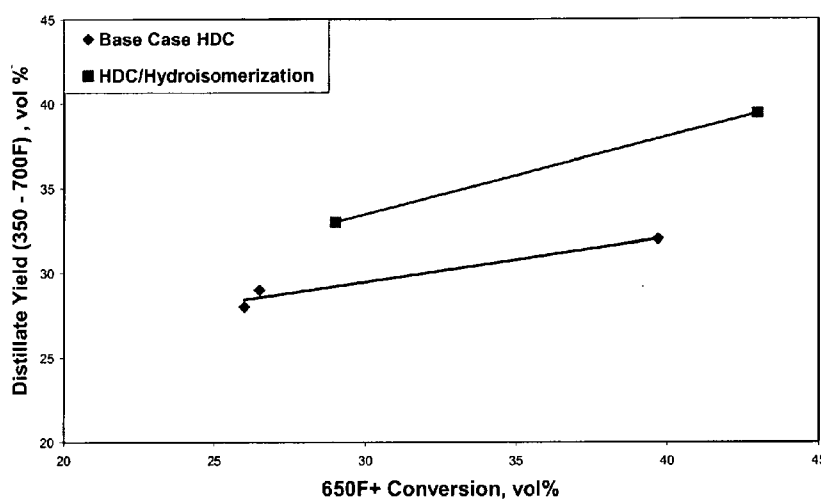
(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- the filing date of the international application is within two months from the date of expiration of the priority period (Rule 26bis.3)

(54) Title: INTEGRATED HYDROCRACKING AND DEWAXING OF HYDROCARBONS

FIG. 2**Comparison of Distillate Yield**

(57) **Abstract:** An integrated process for producing naphtha fuel, diesel fuel and/or lubricant base oils from feedstocks under sour conditions is provided. The ability to process feedstocks under higher sulfur and/or nitrogen conditions allows for reduced cost processing and increases the flexibility in selecting a suitable feedstock. The sour feed can be delivered to a catalytic dewaxing step without any separation of sulfur and nitrogen contaminants, or a high pressure separation can be used to partially eliminate contaminants. The integrated process includes an initial hydrotreatment, hydrocracking, catalytic dewaxing of the hydrocracking effluent, and an option final hydrotreatment.