

(51) International Patent Classification:
A23C 9/18 (2006.01)(21) International Application Number:
PCT/JP2009/007289(22) International Filing Date:
25 December 2009 (25.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2008-335154 26 December 2008 (26.12.2008) JP(71) Applicant (for all designated States except US): **MEIJI DAIRIES CORPORATION** [JP/JP]; 1-2-10, Shinsuna, Koto-ku, Tokyo, 1360075 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TOYODA, Ikuru** [JP/JP]; c/o Meiji Dairies Corporation Division of Research and Development, 540, Naruda, Odawara-shi, Kanagawa, 2500862 (JP). **SATAKE, Yoshinori** [JP/JP]; c/o Meiji Dairies Corporation Division of Research andDevelopment, 540, Naruda, Odawara-shi, Kanagawa, 2500862 (JP). **OHTSUBO, Kazumitsu** [JP/JP]; c/o Meiji Dairies Corporation Division of Research and Development, 540, Naruda, Odawara-shi, Kanagawa, 2500862 (JP).(74) Agent: **HIROSE, Takayuki**; c/o Hirose International Patent Firm, The Royal Building 3F, 3-8-7, Irifune, Chuoku, Tokyo, 1040042 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: SOLID MILK AND METHOD FOR MANUFACTURE THEREOF

[Fig. 1]

Fig. 1

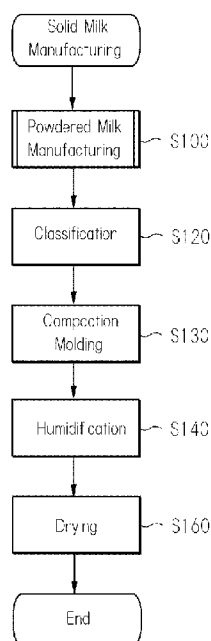

(57) Abstract: The object of the present invention is to provide a method for manufacturing solid milk having suitable hardness for practical use by manufacturing powdered milk having good compaction moldability. In the manufacturing method of solid milk of the present invention, powdered milk for manufacturing solid milk is produced (S100), and then solid milk is produced by produced powdered milk. This manufacturing process (S100) comprises a gas dispersal process (S112) and a spray drying process (S114). In the gas dispersal process (S112), a prescribed gas is dispersed into liquid milk which is an ingredient of the powdered milk. In the spray drying process (S114), the liquid milk having a dispersed prescribed gas is sprayed, and the sprayed liquid milk is dried. By performing these processes, powdered milk is obtained. Solid milk is manufactured by solidifying the powdered milk.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))