



- (51) **International Patent Classification:**
H04W 52/02 (2009.01)
- (21) **International Application Number:**
PCT/US2013/033023
- (22) **International Filing Date:**
19 March 2013 (19.03.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/423,522 19 March 2012 (19.03.2012) US
- (71) **Applicant:** QUALCOMM INCORPORATED [US/US];
Attn: International Ip Administration, 5775 Morehouse
Drive, San Diego, California 92121 (US).
- (72) **Inventors:** BLACK, Peter John; 5775 Morehouse Drive,
San Diego, California 92121 (US). HUANG, Yin; 5775
Morehouse Drive, San Diego, California 92121 (US).
FAN, Mingxi; 5775 Morehouse Drive, San Diego, Califor-
nia 92121 (US).
- (74) **Agent:** SIMON, Darren M.; Attn: International Ip Ad-
ministration, 5775 Morehouse Drive, San Diego, Califor-
nia 92121 (US).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) **Title:** METHOD AND APPARATUS FOR DISCONTINUOUS RECEPTION IN USER EQUIPMENT FOR POWER SAVINGS

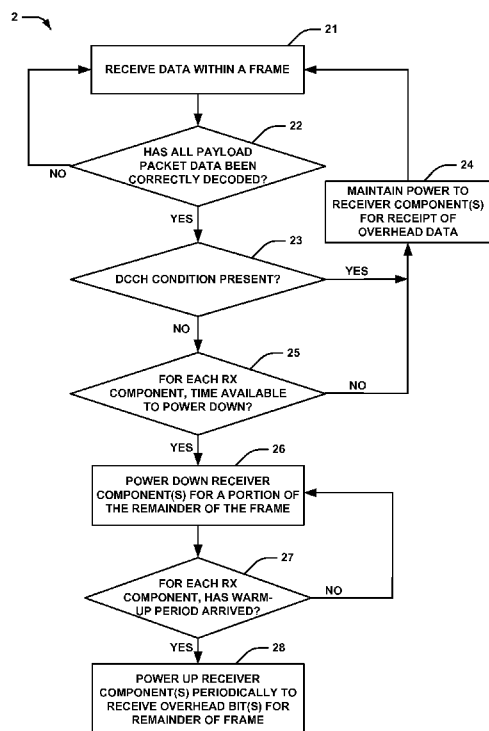


FIG. 2

(57) **Abstract:** The present aspects relate to methods and apparatuses to power off a modem receiver or components of the receiver at a time prior to the end of the frame based on data in the frame being received and properly decoded before the end of the frame. In an aspect, the apparatuses and methods provide power saving in a wireless device, and include receiving data within a frame at a user equipment, determining whether all payload packet data has been correctly decoded prior to an end of the frame, and powering down a receiver component for a portion of a remainder of the frame in response to determining that all payload packet data has been correctly decoded and where a first time period to a next scheduled overhead bit transmission period of a slot in the frame is greater than a second time period corresponding to a warm-up period for the receiver component.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*