

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
20 August 2020 (20.08.2020)



(10) International Publication Number
WO 2020/167382 A2

- (51) International Patent Classification:
Not classified
- (21) International Application Number:
PCT/US2019/067678
- (22) International Filing Date:
19 December 2019 (19.12.2019)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/783,045 20 December 2018 (20.12.2018) US
62/870,028 02 July 2019 (02.07.2019) US
- (71) Applicant: **IMPACT SELECTOR INTERNATIONAL, LLC** [US/US]; 100 Redmond Road, Houma, Louisiana 70353 (US).
- (72) Inventors: **MASSEY, James Patrick**; 91 Kimball Pl., Breckenridge, Colorado 80424 (US). **MARTIN, Brandon**; 426 Beech Crt, Fomey, Texas 75126 (US).
- (74) Agent: **HOFMAN, Dave R.**; Boisbrun Hofman, PLLC, 1255 W. 15th Street, Suite 400, Plano, Texas 75075 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

(54) Title: DOWNHOLE TOOL FOR CONNECTING WITH A CONVEYANCE LINE

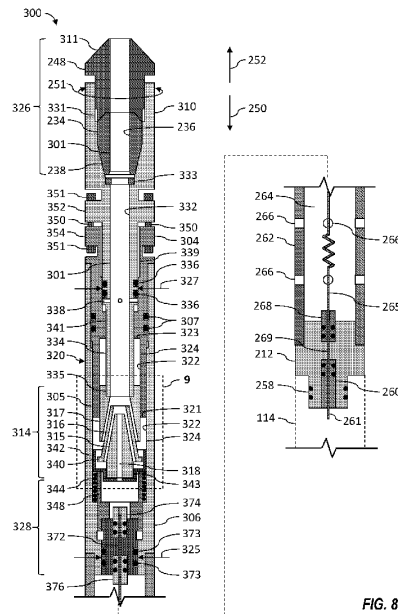


FIG. 8

(57) Abstract: A downhole tool for connecting with a conveyance line. The downhole tool may include a body configured to receive the line and a fluid seal operable to seal against the line when the downhole tool is connected with the line to inhibit wellbore fluid from entering the body when the downhole tool is conveyed within a wellbore via the line. The downhole tool may include a fluid seal slidably disposed within the body and operable to seal against an inner surface of the body to inhibit wellbore fluid from entering the body when the downhole tool is conveyed within the wellbore. The body may include a first body and a second body connected together, wherein the first body is operable to move with respect to the second body when a predetermined tension is applied to the line from the wellsite surface to cause the downhole tool to release the line.

[Continued on next page]

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*