



(51) International Patent Classification:
H01B 3/56 (2006.01)

(21) International Application Number:
PCT/EP2009/062640

(22) International Filing Date:
29 September 2009 (29.09.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/EP2009/057294 12 June 2009 (12.06.2009) EP

(71) Applicant (for all designated States except US): **ABB TECHNOLOGY AG** [CH/CH]; Affolternstrasse 44, CH-8050 Zürich (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HYRENBACH, Maik** [DE/DE]; Gerhardstrasse 76, 40878 Ratingen (DE). **GRANHAUG, Ole** [NO/NO]; Hoyasvegen 49, N-3727 Skien (NO). **CLAESSENS, Max-Steffen** [DE/CH]; Weinbergstrasse 29, CH-5417 Untersiggenthal (CH). **Skarby, Per** [SE/CH]; Bachstrasse 46, CH-5436 Würenlos (CH).

(74) Agent: **ABB Patent Attorneys**; c/o ABB Schweiz AG, Intellectual Property (CH-LC/IP), Brown Boveri Strasse 6, CH-5400 Baden (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **ENCAPSULATED SWITCHGEAR**

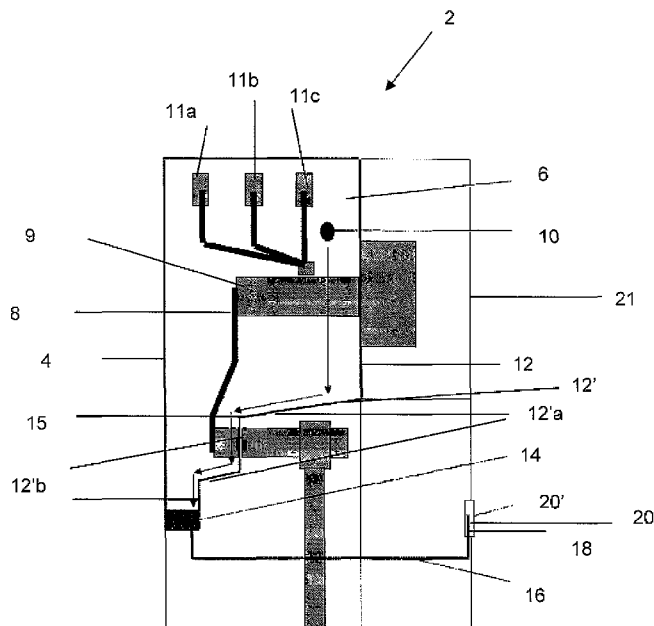


Fig. 1

(57) Abstract: The present invention relates to an encapsulated switchgear comprising a housing (4) defining an insulating space (6) and an electrical active part (8; 9, 11a, 11b, 11c) arranged in the insulating space (6), said insulating space (6) comprising an insulation medium.. The switchgear is characterized in that the insulation medium comprises a dielectric compound having a boiling point of above -25°C.

WO 2010/142353 A1



Published:

— *with international search report (Art. 21(3))*