

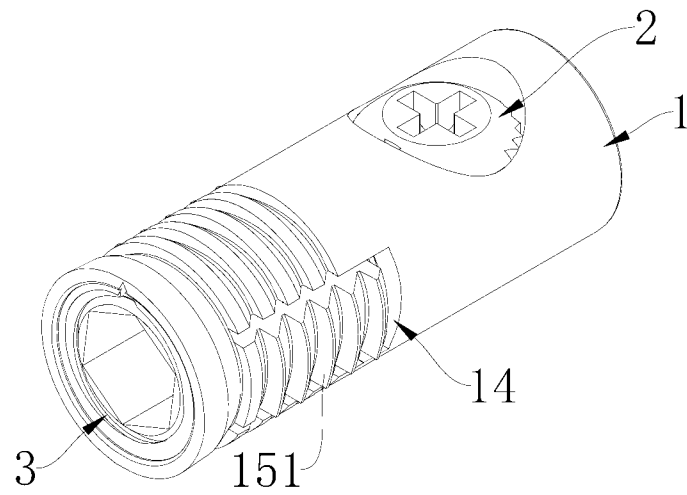


FIG. 1

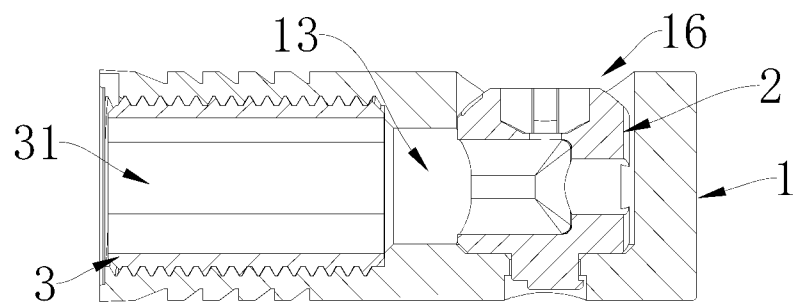


FIG. 2




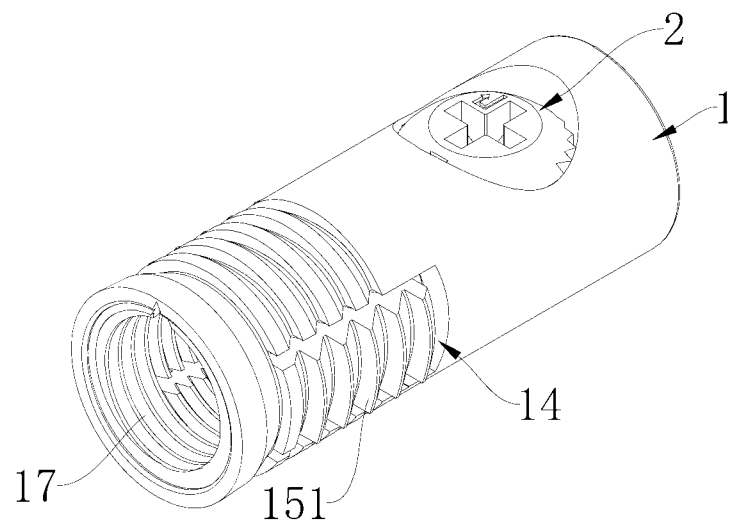


FIG. 3

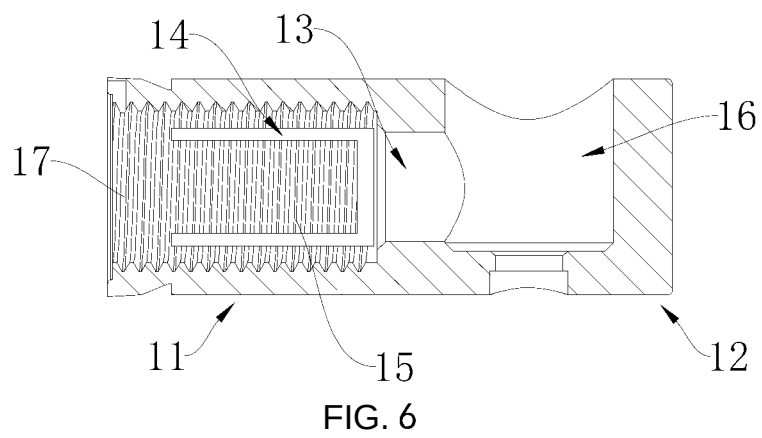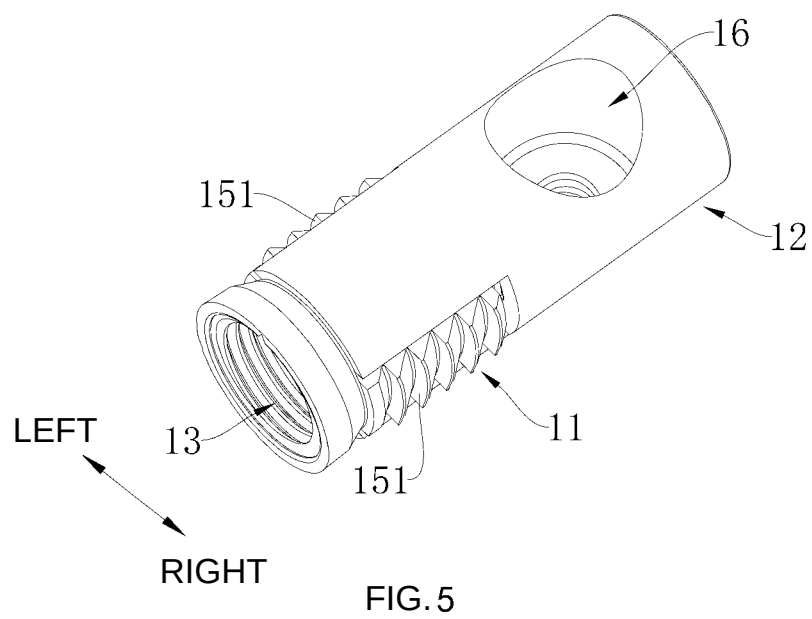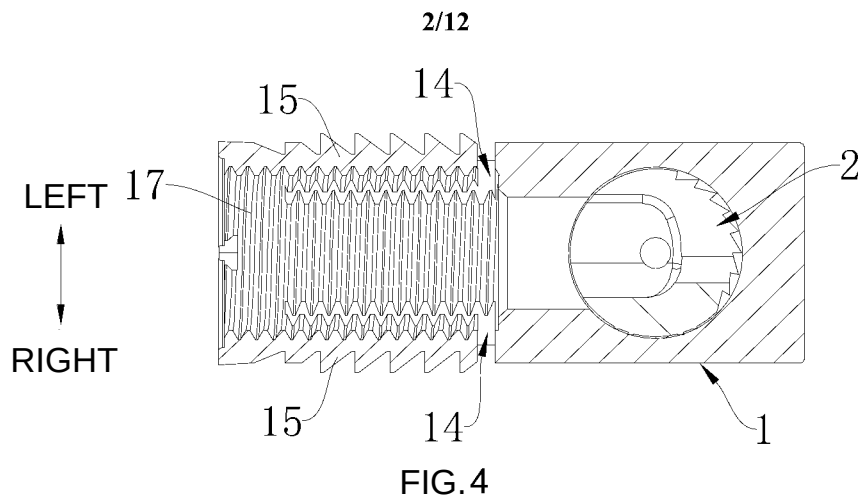

3/12

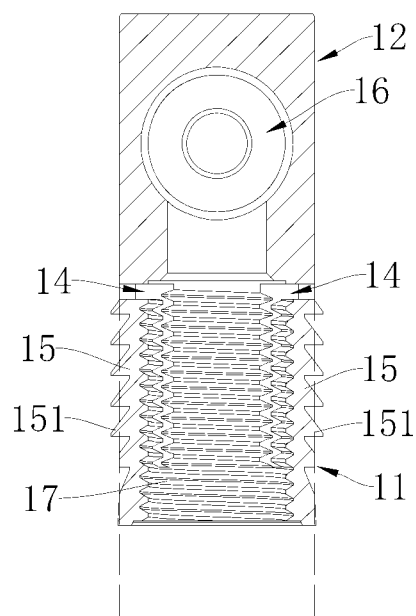


FIG. 7

1

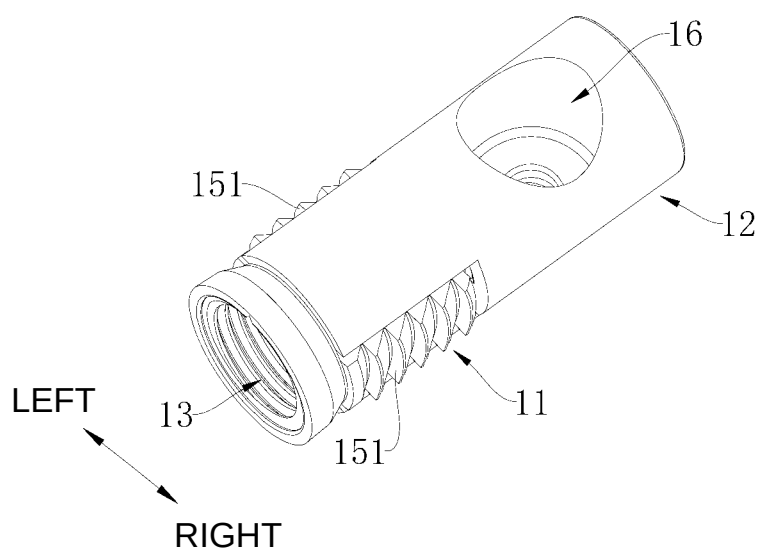


FIG. 8

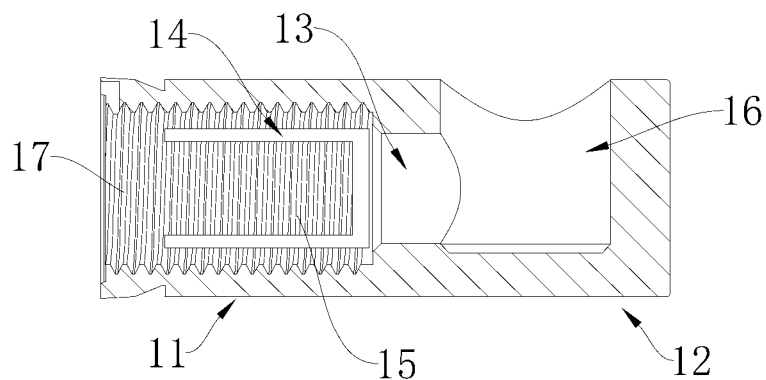


FIG. 9



This diagram shows an exploded perspective view of a fastener assembly. It includes a large rectangular plate (10) with three circular holes. A smaller rectangular plate (20) is positioned below it. A fastener assembly is shown in two states: one where it is partially inserted into the plate (10) and another where it is fully inserted into the plate (20). The fastener assembly consists of a cylindrical body (1) with a spring (2) inside, a threaded cap (3), and a small pin (4). The fastener is shown being inserted into a slot (101) in the plate (10) and then into a corresponding slot in the plate (20).

FIG. 15

G

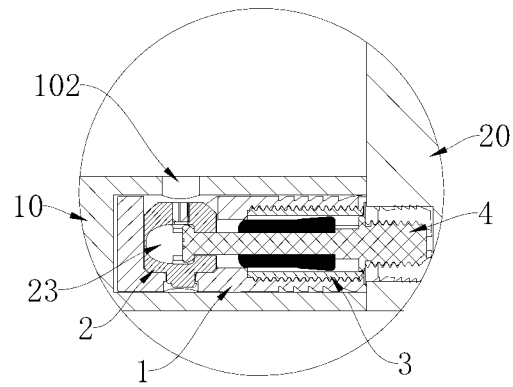


FIG. 16

1

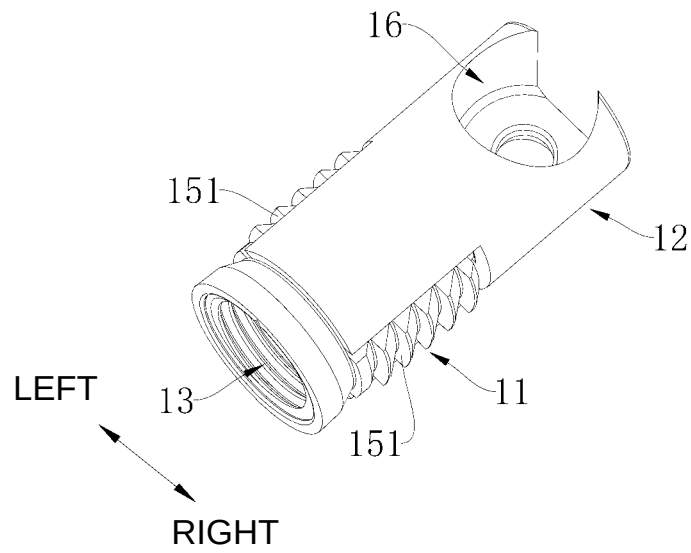


FIG. 17

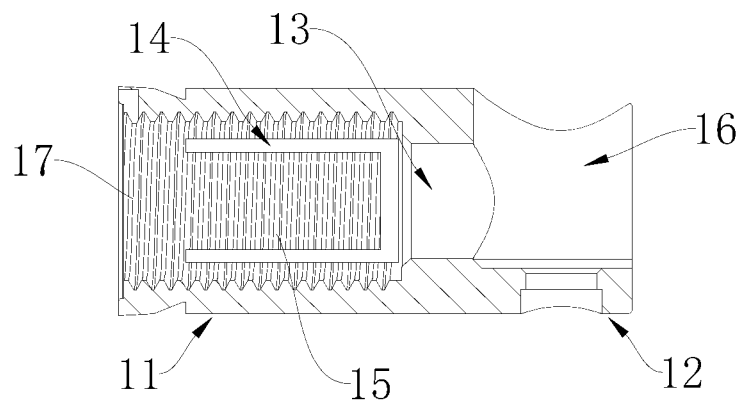


FIG. 18

1

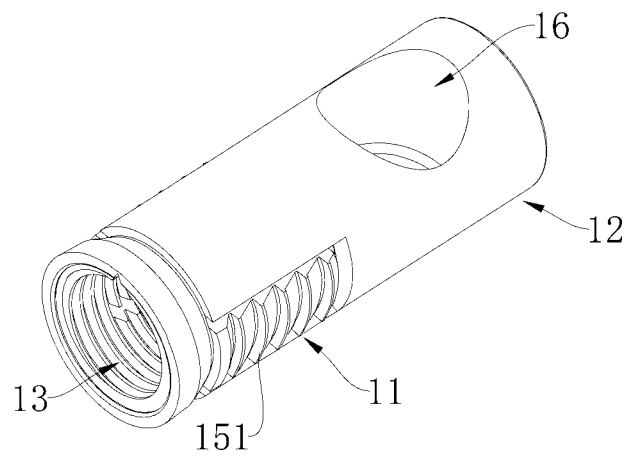


FIG. 19

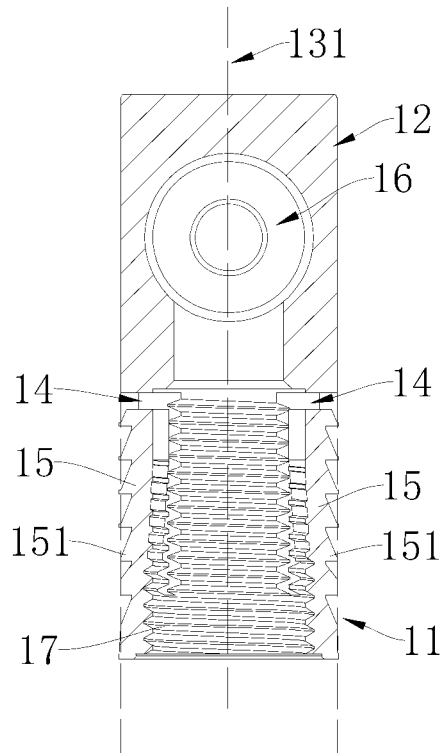


FIG. 20

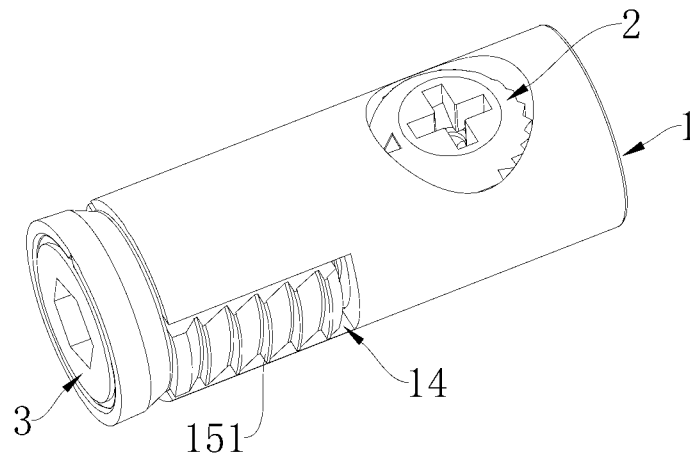


FIG. 21

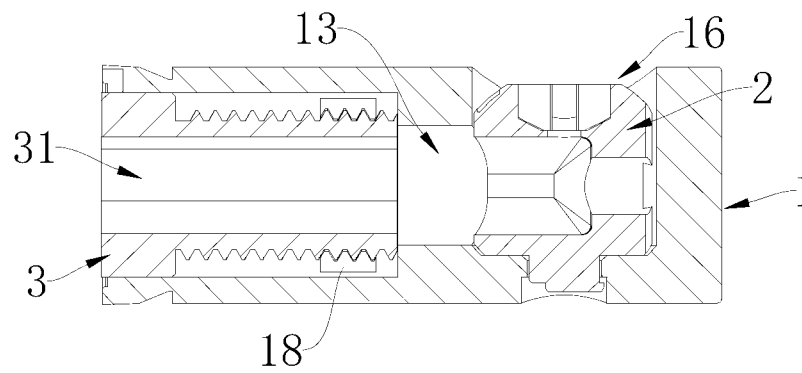


FIG. 22

1

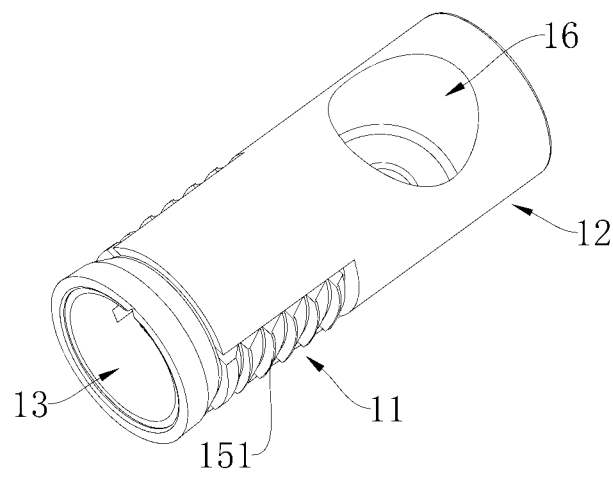


FIG. 23

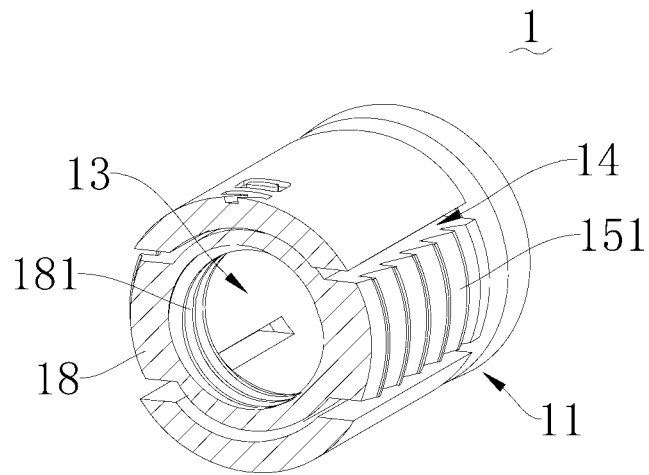


FIG. 24

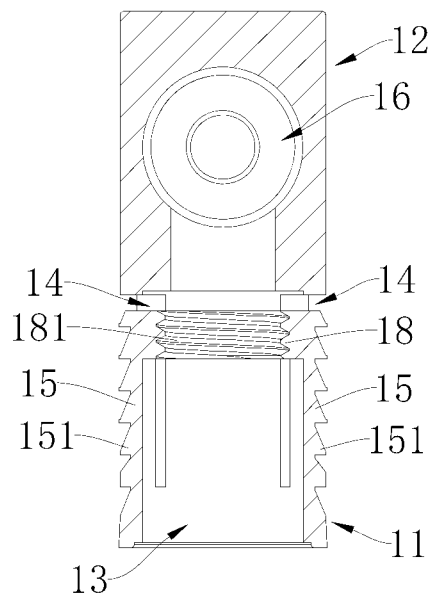


FIG. 25

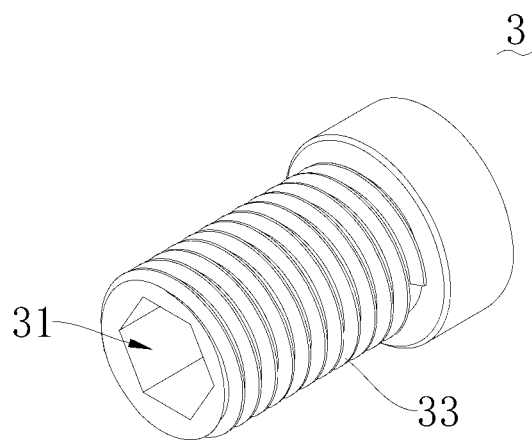


FIG. 26

1

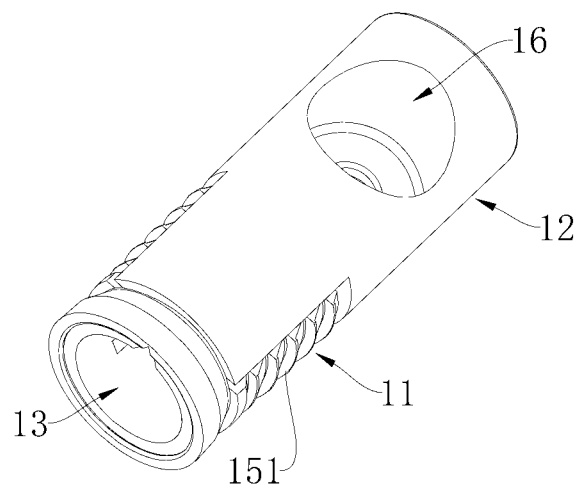


FIG. 27

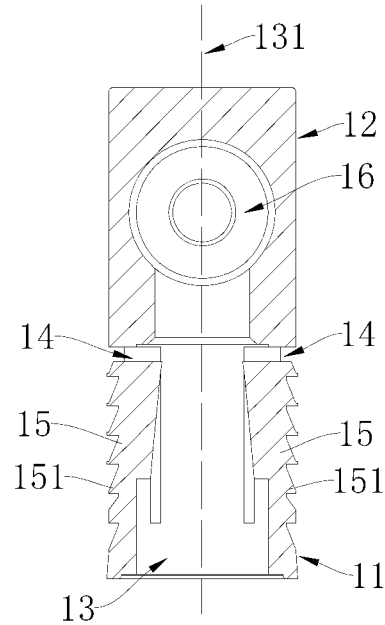


FIG. 28

3

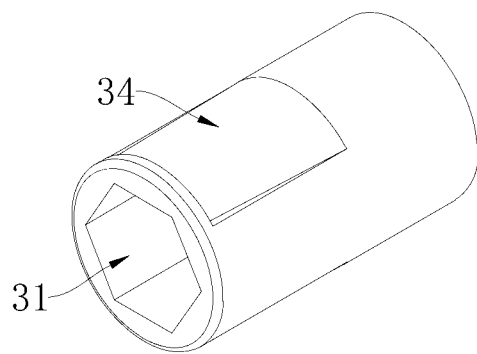


FIG. 29

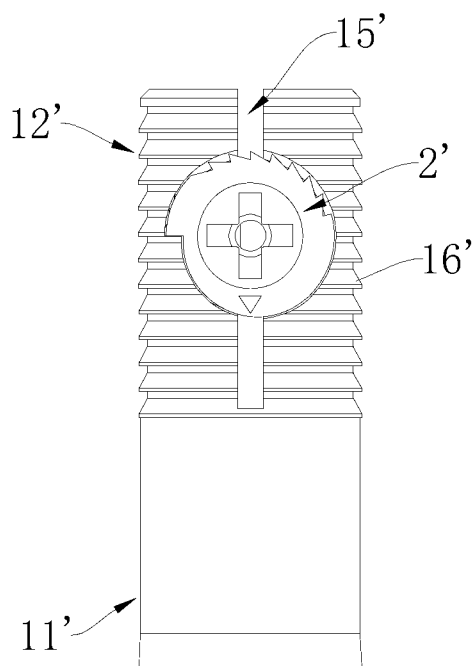


FIG. 30

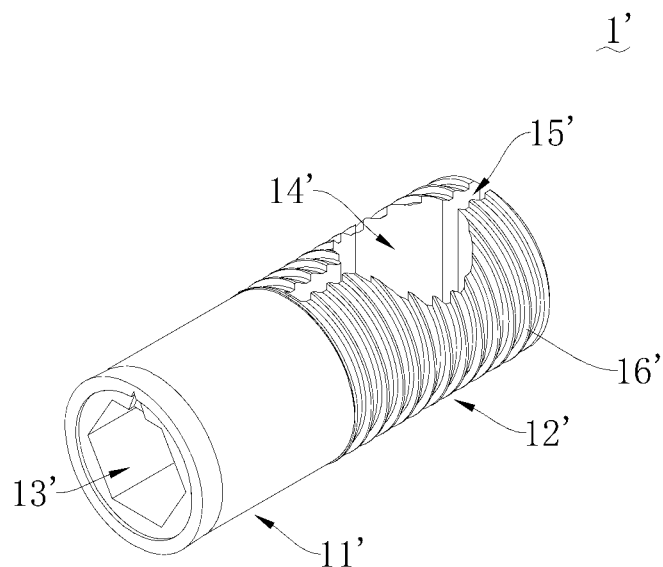


FIG. 31

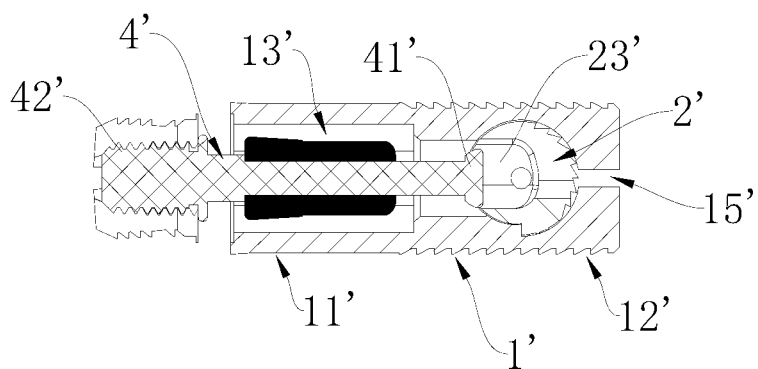


FIG. 32

12/12

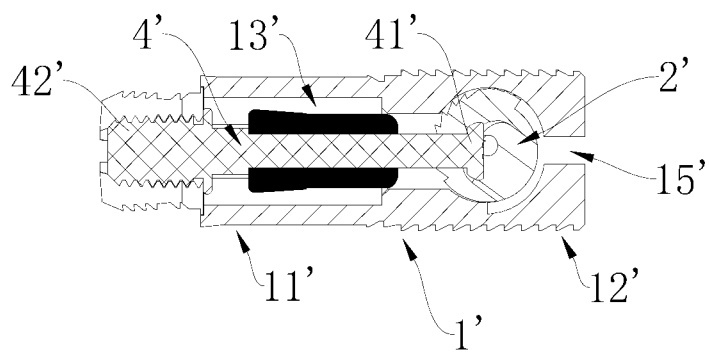


FIG. 33

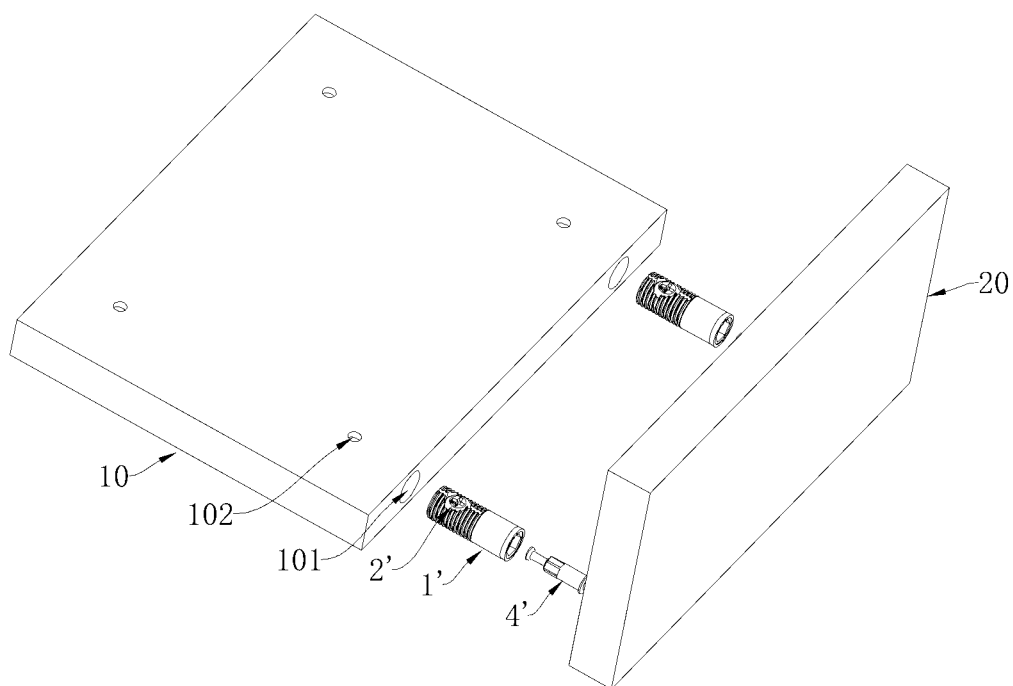


FIG. 34