



- (51) **International Patent Classification:**
H04L 27/26 (2006.01) *H04W 88/08* (2009.01)
- (21) **International Application Number:**
PCT/US2024/033886
- (22) **International Filing Date:**
13 June 2024 (13.06.2024)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
18/334,321 13 June 2023 (13.06.2023) US
- (71) **Applicant: WAVESTREAM CORPORATION** [US/US];
545 West Terrace Drive, San Dimas, CA 91773 (US).
- (72) **Inventor: ROSENBERG, James Jordan;** 179 Melrose
Avenue, Monrovia, CA 91016 (US).
- (74) **Agent: PRITIKIN, Lance Michael;** 1801 Century Park
East, 24th Floor, Los Angeles, CA 90067 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,

(54) **Title:** METHODS AND SYSTEMS FOR DIGITAL REPRESENTATION OF ENCODED COMMUNICATIONS DATA AND SIMPLIFIED EVALUATION OF PRECODING IN SYSTEMS USING PHASE-CYCLICAL PRECODING

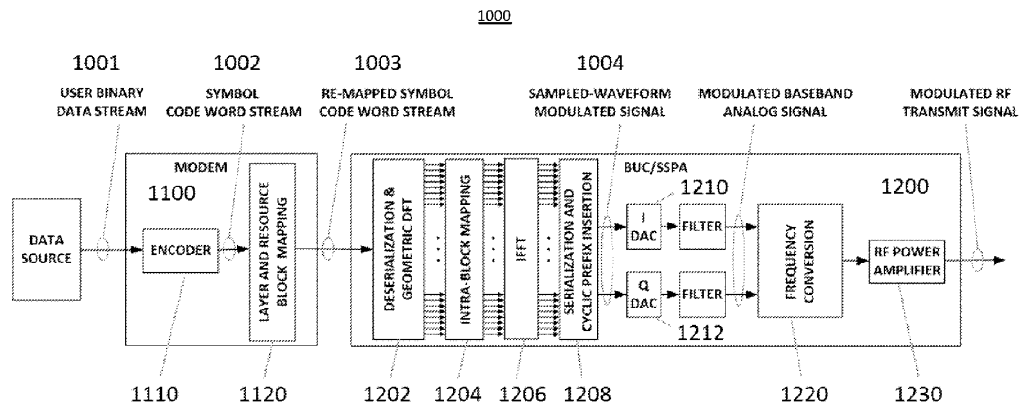


FIG. 11

(57) **Abstract:** The present invention discloses the structure and operation of the "geometric shift transform" that enables the use of symbol alphabet code word representation of a user's binary data stream as the signal transport format from a central unit (modem) of a precoded OFDM system to a remote unit (the RF equipment). The invention simplifies the precoding transform (DFT) calculation, enables secure transmissions, and contemplates layer and resource block mapping operations in the central unit.

[Continued on next page]

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*