

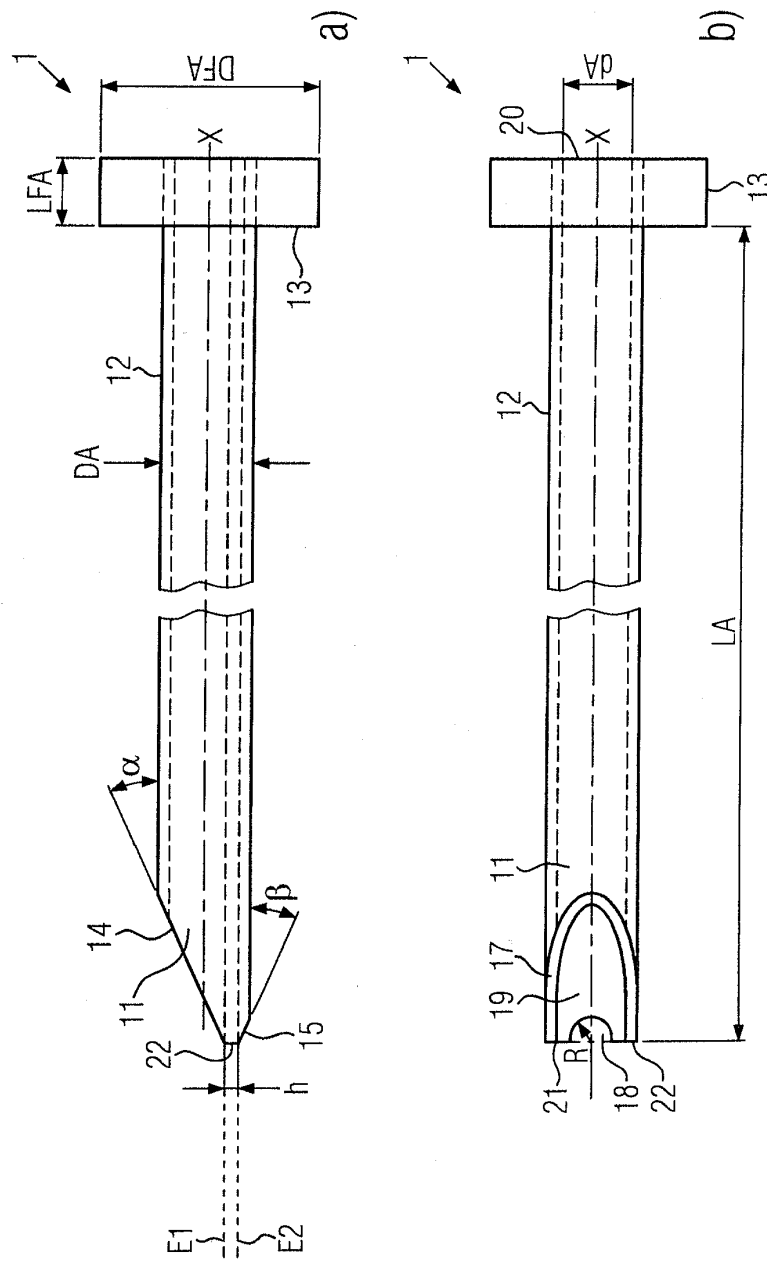


Fig. 1

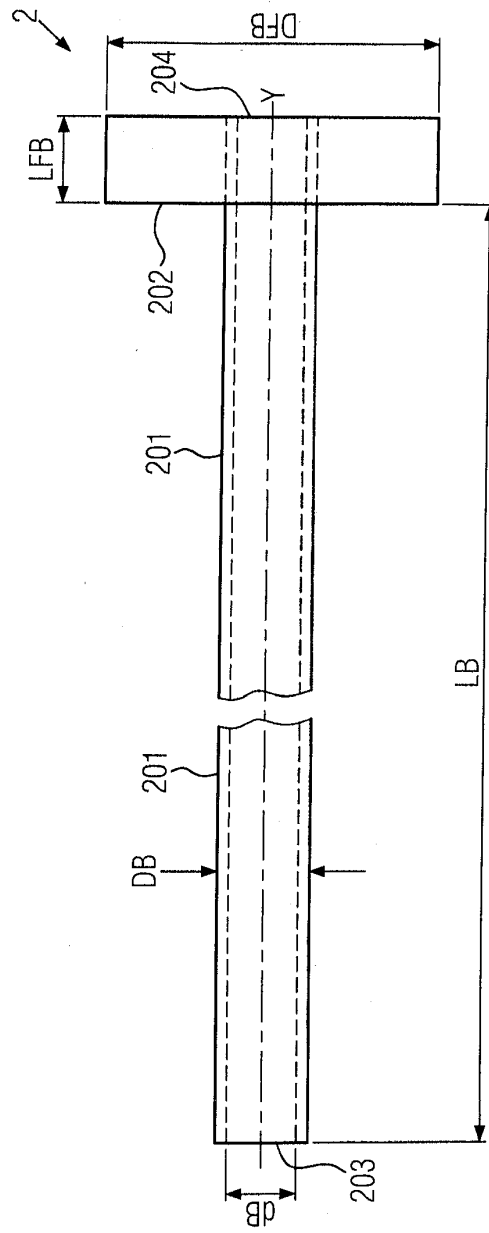


Fig. 2

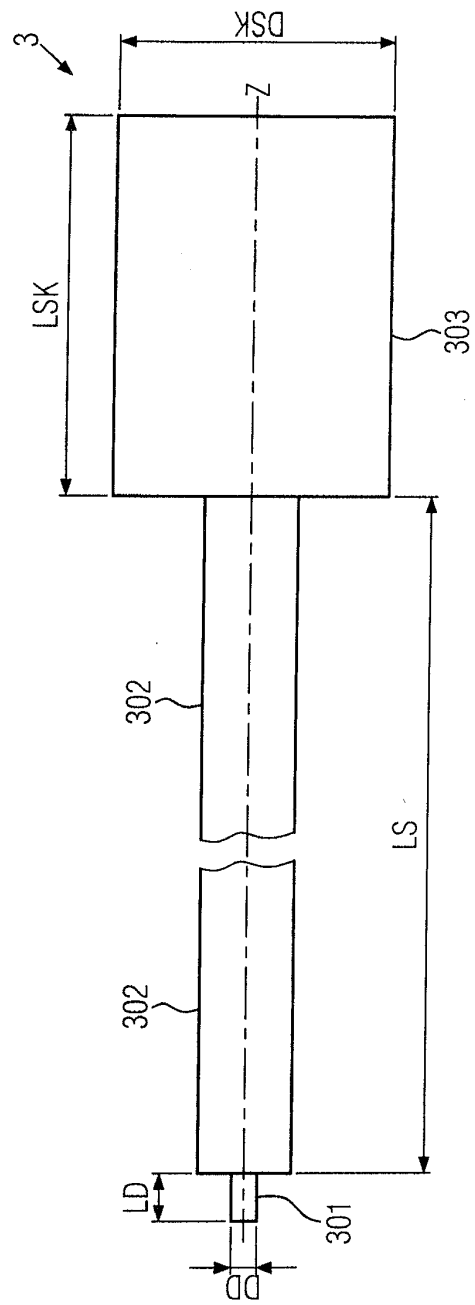


Fig. 3

| <b>Designation</b>             | <b>Dimension</b>    |
|--------------------------------|---------------------|
| <b>applicator sheath</b>       | LA = 215-290 mm     |
|                                | Ø inner dA = 3.4 mm |
|                                | Ø outer DA = 4.0 mm |
| <b>drill wire guide sheath</b> | LB = 210-285 mm     |
|                                | Ø inner dB = 2.4 mm |
|                                | Ø outer DB = 3.0 mm |
| <b>pusher</b>                  | LS = 220-305 mm     |
|                                | Ø outer DS = 3.0 mm |

Fig. 4

| <b>Designation</b>             | <b>Dimension</b>                       | <b>Tolerance</b> |
|--------------------------------|----------------------------------------|------------------|
| <b>applicator sheath</b>       | LA = 240 mm (without flange)           | $\pm 1$ mm       |
|                                | angles $\alpha, \beta = 25^\circ$      | $\pm 5^\circ$    |
|                                | 2 tip ends/ teeth with h = 1 mm        | $\pm 0.5$ mm     |
|                                | $\varnothing$ inner dA = 3.4 mm        | - 0 mm           |
|                                | $\varnothing$ outer DA = 4.0 mm        | + 0.05 mm        |
|                                | $\varnothing$ flange DFA: 24 mm        | - 1 mm/+ 6 mm    |
| <b>drill wire guide sheath</b> | LB = 235 mm (without flange)           | - 1 mm/+ 0 mm    |
|                                | $\varnothing$ inner dB = 2.4 mm        | - 0 mm           |
|                                | $\varnothing$ outer DB = 3.0 mm        | + 0.04 mm        |
|                                | $\varnothing$ outer flange DFB = 12 mm | - 1 mm/+ 6 mm    |
| <b>pusher</b>                  | LS = 255 mm (without head)             | $\pm 0.5$ mm     |
|                                | length mandrel LD = 2 mm               | $\pm 0.1$ mm     |
|                                | $\varnothing$ mandrel DD = 1.0 mm      | - 0 mm           |
|                                | $\varnothing$ outer DS = 3.0 mm        | + 0.04 mm        |
|                                | length head LSK = 15 mm                | $\pm 2$ mm       |
|                                | $\varnothing$ head DSK = 10 mm         | $\pm 2$ mm       |

Fig. 5