



- (51) **International Patent Classification:**
F24F 13/26 (2006.01) **F04F 5/16** (2006.01)
F24F 6/12 (2006.01)

(21) **International Application Number:**
PCT/GB2013/050327

(22) **International Filing Date:**
13 February 2013 (13.02.2013)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
1203895.6 6 March 2012 (06.03.2012) GB

(71) **Applicant:** **DYSON TECHNOLOGY LIMITED**
[GB/GB]; Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).

(72) **Inventors:** **STANIFORTH, Mark**; c/o Dyson Technology Limited, Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB). **BEAVIS, Daniel**; c/o Dyson Technology Limited, Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB). **PULLEN, Jude**; c/o Dyson Technology Limited, Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB). **GAM-MACK, Peter**; c/o Dyson Technology Limited, Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).

(74) **Agents:** **BOOTH, Andrew** et al.; Dyson Technology Limited, Intellectual Property Department, Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).


(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HUMIDIFYING APPARATUS

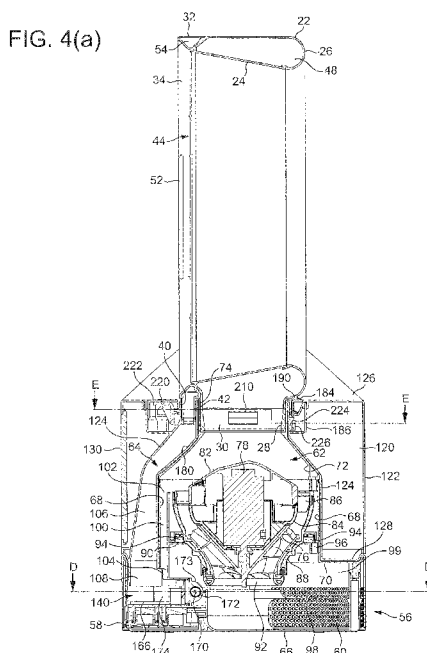

(57) Abstract: Humidifying apparatus includes a base housing a motor and impeller unit for generating a first air flow. A nozzle includes an interior passage for receiving the first air flow and an air outlet for emitting the first air flow. The nozzle defines an opening through which air from outside the apparatus is drawn by air emitted from the air outlet. The apparatus is configured to humidify a second air flow, which is emitted from a plurality of second air outlets. The second air flow is humidified with water supplied from a water tank mounted on the base. The water tank surrounds at least an upper section of the motor and impeller unit.