



(51) International Patent Classification:

C08L 23/06 (2006.01) *D01F 8/06* (2006.01)
C08L 23/04 (2006.01)

(21) International Application Number:

PCT/SG2015/050485

(22) International Filing Date:

3 December 2015 (03.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1421581.8 4 December 2014 (04.12.2014) GB

(71) Applicant: **THE POLYOLEFIN COMPANY (SINGAPORE) PTE LTD** [SG/SG]; 150 Beach Road, #10-00 Gateway West, Singapore 189720 (SG).

(72) Inventor: **TAN, Jermaine**; 401 Ayer Merbau Road, Singapore 628285 (SG).

(74) Agent: **KINNAIRD, James Welsh**; Marks & Clerk Singapore LLP, Tanjong Pagar, P O Box 636, Singapore 910816 (SG).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: A POLYETHYLENE BLEND USED ON ITS OWN AS A CARRIER FOR MICROFIBER FABRICATION PROCESS

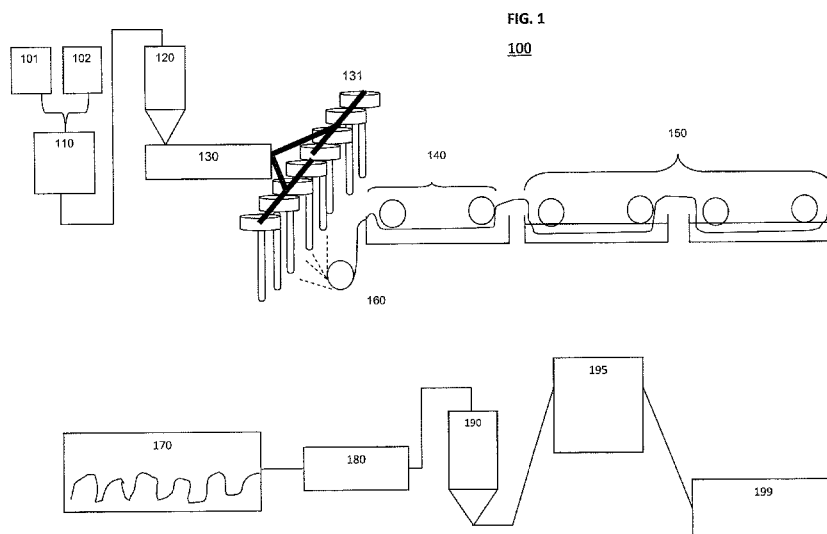

(57) Abstract: We disclose herein a polymer blend comprising a first polyethylene; and a second polyethylene, wherein the blend has a melt flow rate of from 45 g/10min to 60 g/10min, a density of from 0.910 g/cm³ to 0.930 g/cm³ and a molecular weight distribution (Mw/Mn) of from 4 to 7. There is also disclosed a process to make said polymer blend and uses thereof.