



(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2010/054986

(22) International Filing Date:
1 November 2010 (01.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/618,123 13 November 2009 (13.11.2009) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAYTER, Steven, R.** [US/US]; 9404 West Road, No. 1511, Houston, TX 77064 (US). **TRIPLETT, William, N.** [US/US]; 5226 Ashmere Lane, Spring, TX 77379 (US).

(74) Agent: **DUPHORNE, Darin, H.**; Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: MODULAR HYDRAULIC OPERATOR FOR A SUBTERRANEAN TOOL

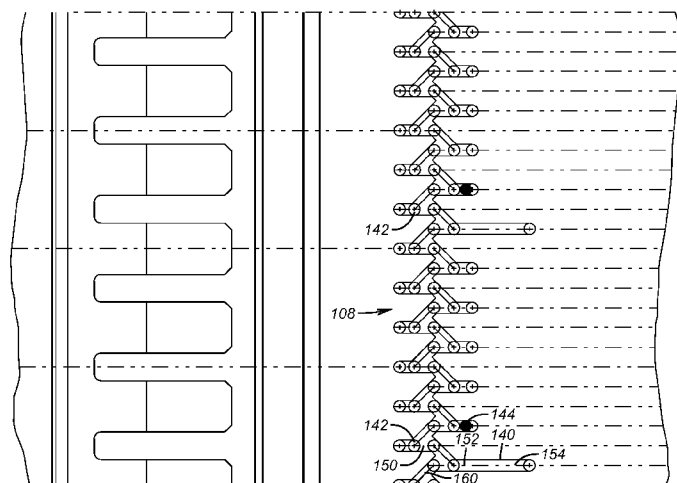


FIG. 3

(57) Abstract: A modular pressure operated actuator can be coupled with a downhole tool to selectively operate it at least once. In the preferred embodiment the module can be mounted adjacent an isolation valve and after a fixed number of on and off pressure cycles allow a spring to push an actuator to operate the valve to an open position. The actuator, in another embodiment, can be reset with a tool run into the module to move the actuator back against a power spring and hold that spring force until the pressure cycling begins again. The preferred application is for a formation isolation ball valve but other valves, such as sliding sleeves, or other types of downhole tools can be actuated with the module that permits a retrofit of a hydraulic operation to a heretofore purely mechanically actuated tool.