

| REPLACED SHEETS                     |             | SG                                 |
|-------------------------------------|-------------|------------------------------------|
| <input checked="" type="checkbox"/> | Description | : paged ...1... to paged ...18...  |
| <input checked="" type="checkbox"/> | Claim(s)    | : paged ...11... to paged ...23... |
| <input type="checkbox"/>            | Drawing(s)  | : paged ..... to paged .....       |
| <input checked="" type="checkbox"/> | Abstract    | : paged ..... to paged .....       |
| DATE OF RECEIPT .....               |             |                                    |

**ENVELOPE FOR TRANSPARENCY HAVING INCREASED FLEXIBILITY****Background of the Invention**

5

**Field of the Invention**

The invention relates to an envelope for holding transparencies used in overhead projectors. Specifically, the envelopes include at least one opaque flap attached to the envelope using an adhesive tape  
10 having increased flexibility.

**Description of the Related Art**

Business presentations, lectures and the like often are augmented by the use of imaged transparencies, which  
15 are exhibited to the viewers on a screen by means of an overhead projector (OHP). The individual transparencies are delicate, and easily damaged in storage or transit. Various types of covers, folders and envelopes have been provided in order to enable professional presentations,  
20 as well as interim protection of the transparencies.

U.S. Patent No. 3,875,693 discloses the framing of a transparency in a frame made from carton, paperboard and the like. The frame is meant to mask the illumination gaps formed about the peripheral of the transparency  
25 proper. The frame can also be used to make notes or other memoranda needed by the lecturer which remain unseen by the audience. However, these frames are bulky and will not fit into standard size files, binders and shelves, being therefore difficult to store and  
30 transport. Also, they are not easily removable without destruction of the frame and attendant damage to the transparency. Finally, the frames are not convenient to attach to transparencies as each one must be carefully positioned and attached by hand.

35 Swedish Patent Application No. 382,266 discloses an envelope which is a plastic sheet pocket having punched holes along one side, and being open at the top for insertion of the transparency to be presented. These envelopes are removable, simple to handle, store and



-2-

transport as the outer dimensions are those of standard binders or files. Moreover, the transparency is protected by the envelope and at the presentation, notes can be made on the envelope.

5       The disadvantage of this envelope is that peripheral illumination is not masked and the lecturer cannot make written notes on the envelopes without having these notes being shown on the screen as well. The punched holes also show an outline on the screen. Therefore, this  
10 envelope does not yield a presentation having an extremely professional appearance.

U.S. Patent Nos. 3,253,358; 3,264,936; 3,438,702; 3,438,703; 3,524,703; 3,536,393; 3,537,792; 3,544,211; 3,600,079; and Swedish Patent Application No. 346,166  
15 describe further examples of covers or envelopes for OHP transparencies. The covers and envelopes disclosed in these publications are complicated and difficult to handle and have many drawbacks, e.g., most of these presuppose that the transparencies are to be presented in  
20 a prescribed order and the covers of most of these transparencies are difficult to remove.

U.S. Patent No. 4,810,544 discloses another transparent sleeve comprising a transparent sheet material having a single fold dividing the sheet into two  
25 halves, and a strip of double coated adhesive tape running the length of an edge of the sheet substantially parallel to the fold. The tape is disclosed to have a low tack, reusable adhesive on the side of the tape which will adhere to the top strip. When folded, the single  
30 sheet forms a sleeve. This envelope protects the printed media, and can be stored in a binder when holes are punched along the edge, but again, any written notes or prompts will be visible on the screen.

U.S. Patent No. 4,402,585 discloses an envelope for  
35 overhead transparencies that overcomes many of the disadvantages of the previously described envelopes. The envelope comprises a rectangular pocket formed of

This Sheet Has Been Replaced



-3-

transparent sheet material defining opposed rectangular faces which are separable along at least one side edge for insertion of the transparency therebetween. At least one opaque flap is attached in a foldable manner along one of the longitudinal side edges of the pocket. The flap is attached to and spaced a distance from the longitudinal edge such that in the unfolded position the flap extends beyond the side edge and covers the longitudinal edge. In the folded position, the flap exposes the longitudinal side edge. Holes may be punched along the side edge of the material to permit storage of the envelope in a binder, file or the like. Preferably, the flaps are formed of a plastic material which accepts written text by conventional writing instruments.

When stored, the flaps are in the folded position, and are unfolded for use. The means of attachment must allow the flaps to stay in the unfolded position during presentation. Otherwise the flaps might tend to spring back to their folded position, which is inconvenient for the presenter, and may cover the added notes. To aid the situation, the envelope can be placed with the flaps face down on the overhead projector stage, so that the weight of the envelope and the overhead transparency can insure that the flaps stay unfolded. However, where flaps are difficult to fold, the envelope will not lay flat on the stage, which can cause focusing problems, which are especially severe when one uses a reflective type overhead projector. In addition, due to the operating temperature of the OHP and stage, the adhesive used to attach the flap can be transferred to the stage, causing unsightly spots on the screen and messy blotches on the stage which can also transfer to materials used thereafter.

The present inventors have discovered that, by using a certain combination of backing film and adhesive, the flaps can be securely attached to the transparent envelope, easily remaining in either the folded or the



-4-

unfolded or open position. This obviates the need to turn the envelopes face down on the stage. Further, with the preferred composite tapes, the envelopes can be turned face down and lay flat on the stage with minimal adhesive transfer.

#### Summary of the Invention

The present invention comprises an improved envelope for transparencies for overhead projectors, said envelope comprising a substantially rectangular pocket of transparent sheet material, said pocket having two longitudinal side edges connected by shorter side edges, said pocket being open at least along one side edge for insertion of a transparency, at least one opaque flap attached in a foldable manner along one of said side edges by means of a flexible adhesive tape, said flap having a folded and an unfolded position, said tape comprising a flexible polyester backing having a thickness of 15 micrometers or less, and attached on one surface thereof, an adhesive layer, wherein said tape has a flexibility measurement of not more than 2.5 grams, and a 180° peel adhesion of at least 100 grams per centimeter, wherein the flap, when unfolded, remains in the unfolded position, and when turned face down on an overhead projector stage will exhibit minimal adhesive transfer to said stage at the operating temperature of the overhead projector.

This invention also provides an adhesive tape suitable for use in an improved envelope for overhead transparencies, having at least one opaque flap, such tape comprising a flexible polyester material having a thickness of less than 15 microns, and coated on one surface of said backing is a flexible adhesive layer wherein said composite tape has a flexibility measurement of not more than 2.5 grams, and a 180° peel adhesion of at least 100 grams per centimeter, wherein said tape will



-5-

exhibit minimal transfer to an overhead projector stage at the operating temperature of the overhead projector.

The term "adhesive tape" as used herein means an adhesive which is positioned on, or coated as a layer on, at least one major surface of a polyester substrate. The adhesive may be pressure-sensitive, heat-activatable, heat-bondable, or any other type of known adhesive. The tape may be premade and placed onto the envelope during construction thereof, or it may be made concurrently with the envelope, or after the envelope is constructed, by coating the chosen adhesive onto a polyester material which has already been placed in the envelope.

#### Detailed Description of the Invention

The improved envelopes of the invention comprise an adhesive tape having a polyester backing having a thickness of 15 micrometers or less, preferably from 5 micrometers to 10 micrometers. The backing may be any thermoplastic film forming polyester produced by condensing a dicarboxylic acid or a lower alkyl diester thereof, e.g., terephthalic acid, isophthalaic, phthalic 2,5-naphthalene dicarboxylic acid, succinic acid, adipic acid, and the like, with a glycol such as ethylene glycol, 1,3-propanediol, 1,4-butanediol, and the like. The polyester may also be a copolyester of any such acid and glycol. The preferred polyester is poly(ethylene terephthalate) for its clarity, durability and cost.

Useful adhesives for the adhesive layer of such tape are those having good adhesion to the polyester backing, and the envelope, and include acrylics, tackified or untackified, tackified rubber-based adhesives, urethanes, silicones and the like. They can be hot melt adhesives, solvent-based, water-based, or emulsion, E-beam or actinic radiation curable or moisture curable.

The thickness of the adhesive layer depends on such factors as the type of adhesive used and the type and thickness of the film backing, however, the thicknesses



-6-

of the adhesive layer typically range from 2.5 micrometers to 100 micrometers, preferably from 5 micrometers to 75 micrometers, most preferably from 10 to 25 micrometers. While some of the preferred adhesives can be coated on the required backing up to 100 micrometers in thickness without causing excessive adhesive transfer, this thickness is generally not preferred from resource management and aesthetic perspectives.

10 At the preferred thickness range, the adhesive layer has a 180° peel adhesion of at least 100 grams per centimeter (under conditions specified, *infra*), for the flaps to remain securely attached to the edges of the pocket. When adhesives with lower peel adhesion values  
15 are used, the adhesive will tend to separate from the edges of either the main pocket or the flap after repeated opening and closing of the flaps and expose more of the adhesive layer for adhesive transfer to the stage if the flaps are placed face down.

20 The adhesives can be pressure-sensitive, heat activatable pressure-sensitive, or heat bonding with the pressure-sensitive and heat-activatable pressure-sensitive being preferred. Also useful are heat-set adhesives including thermoplastic and thermosetting  
25 resins, which have the advantages of good bonding strength to prevent separation of the adhesive, and are nontacky at the operating temperature of the overhead projector, so long as they meet the flexibility and peel requirements necessary. Useful pressure-sensitive  
30 adhesives possess good bonding and low creep properties, while remaining flexible, which is one requirement so that when the flap is in the unfolded position, there will be less tendency for the adhesive to creep onto the stage or other surface contacted. The thin backing of  
35 the tape and resultant flexibility provides a smaller exposed area when the flap is in the unfolded position. Minimal adhesive layer thickness also helps in minimizing



-7-

amount of adhesive which is exposed when the flap is in the unfolded position. These factors, along with the adhesive properties substantially reduce the amount of adhesive transfer when compared to conventional products.

5 Other helpful procedures include detackifying the exposed adhesive edge along the fold line, coating variations and the like. Useful detackifying treatments include treating the exposed edges with E-beam or the addition of an appropriate chemical compound to either  
10 coat or react with the adhesive.

Preferred adhesives include acrylics and tackified rubber-based adhesives. For the preferred adhesives, a very thin layer of 10 micrometers can provide the required peel adhesion.

15 One preferred class of pressure-sensitive adhesives are acrylate adhesives. They can be monomers and/or oligomers such as (meth)acrylates, (meth)acrylamides, vinyl pyrrolidone and azlactones, as disclosed in U.S. Pat. No. 4,304,705, (Heilmann), Re 24,906 (Ulrich), and  
20 U.S. 4,181,752, (Martens). Such monomers include mono-, di-, or poly-acrylates and methacrylates.

Preferred acrylates are typically alkyl acrylates, preferably monofunctional unsaturated acrylate esters of non-tertiary alkyl alcohols, the alkyl groups of which  
25 have from 1 to 14 carbon atoms. Included with this class of monomers are, for example, isooctyl acrylate, isononyl acrylate, 2-ethyl-hexyl acrylate, decyl acrylate, dodecyl acrylate, n-butyl acrylate, and hexyl acrylate. The alkyl acrylate monomers can be used to form homopolymers  
30 or they can be copolymerized with polar copolymerizable monomers. When copolymerized with strongly polar monomers such as monoolefinic mono- and dicarboxylic acids, hydroxyalkyl acrylates, cyanoalkyl acrylates, acrylamides or substituted acrylamides, the alkyl  
35 acrylate monomer generally comprises at least 75% of the polymerizable monomer composition. When copolymerized with moderately polar monomers such as N-vinyl



-8-

pyrrolidone, acrylonitrile, vinyl chloride or diallyl phthalate, the alkyl acrylate monomer generally comprises at least 70% of the polymerizable monomer composition.

The pressure-sensitive adhesive typically contains  
5 at least one initiator to aid in polymerization of the monomers. Suitable initiators include thermally-activated initiators such as azo compounds, hydroperoxides, peroxides, and the like, and photoinitiators such as the benzoin ethers, substituted  
10 benzoin ethers, substituted acetophenones, substituted alpha-ketols such as 2-methyl-2-hydroxy-propiophenone, aromatic sulphonyl chlorides such as 2-naphthalene sulphonyl chloride, and photoactive oximes such as 1-phenyl-1,1-propanedione-2-(O-ethoxycarbonyl)  
15 oxime. Generally, the initiator is present in an amount of from 0.01 part to 3.0 parts based on 100 parts monomer weight.

The pressure-sensitive adhesive layer may also be cross-linked. Preferred crosslinking agents for acrylic  
20 pressure-sensitive adhesives are multiacrylates such as 1,6-hexanediol diacrylate as well as those disclosed in U.S. Patent No. 4,379,201 (Heilmann et al.). Other useful crosslinking agents include those chromophore substituted-s-triazines taught in U.S. Patents 4,330,590  
25 (Vesley), and 4,329,384 (Vesley et al.). Each of the crosslinking agents is useful in the range of from 0.01% to 1% of the total weight of the monomers.

Useful heat activatable adhesives include thermoplastic and thermosetting resins. Another  
30 preferred class of adhesives is that of rubber-type adhesives. The adhesives comprise a rubber resin, which may be either a natural rubber or a synthetic elastomer such as styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof,  
35 polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and the like.



-9-

Mixtures of such rubber resins may also be used. Such resins are available commercially under such trade names as Kraton™ e.g., Kraton™ G1657, D1101, D1107, and 1118, all available from Shell Chemical Co., Stereon™, e.g.,  
5 Stereon™ 840A, and 845A, and Duradene™ e.g., Duradene™ 710, 711, and 713, all available from Firestone Tire and Rubber, and those available from BF Goodrich under the tradename Hycar™, and the like.

Such rubber-type adhesives typically also contain a  
10 tackifying agent. Useful tackifying agents include rosin esters and rosin acids, mixed aliphatic/aromatic tackifying resins, polyterpene tackifying agents, and hydrogenated tackifying agents. Preferred tackifying agents include the aliphatic hydrocarbon resins, the  
15 polyterpene resins and the hydrogenated resins. Mixtures of tackifying agents may also be used.

Rubber-type adhesives may also contain a plasticizing agent including naphthionic oils, paraffinic oils, aromatic oils and mineral oils.

20 Useful commercially available adhesives include Findley "590-371", and "802-334"; "HL-2203-X", "HM-2703", "HL-7389-X", available from H.B. Fuller; and "70-7141", and "70-7254", available from National Starch. Any useful adhesive may also contain such conventional  
25 additives as pigments, antioxidants, fillers, and the like, so long as such additives do not render the adhesive outside the flexibility and peel ranges required.

The adhesive chosen must have good bonding to the  
30 film backing, either as provided or the surface of the film backing can alternately be treated either by corona treatment or chemical adhesion promoters to insure good bonding. The composite tape has a flexibility measurement of no more than 2.5 grams as measured *infra*,  
35 preferably no more than 1.6 grams. Preferred adhesives also have a 180° peel adhesion of at least 100 grams per centimeter, preferably at least 150 grams per centimeter;



-10-

and a composite thickness of less than 90 micrometers, preferably less than 40 micrometers.

The flexibility measurement requirement can be as low as possible, but in practice, measurements of lower than 1 gram become difficult to test. A tape with very low flexibility numbers, or outside the testing range is useful if it has adequate peel, and adequate integrity needed for the equipment processing and handling. At measurements higher than 2.5 grams, the flaps are difficult to unfold and will tend not to remain in the opened or unfolded position and to spring back to the closed position.

The backing can also have low adhesion backsize coating thereon or any other treatment to facilitate unwinding from a roll, so long as such treatments do not render the tape outside the flexibility range.

The flaps are preferably made from materials that are capable of being overwritten to enable the lecturer to make notes thereon, including bond paper, paperboard, opaque films such as pigment filled polyester; polyvinylchloride; polyolefins including polyethylene and polypropylene; and other similar materials, with polyvinyl chloride being preferred.

The pockets can be made from any transparent polymeric sheet material including cellulose esters, polyesters such as polyethylene terephthalate, polyamides such as nylon, polyolefins such as polyethylene and polypropylene, polycarbonates, polyethers and polyvinyls such as polyvinylchloride. Polyesters are preferred, most preferably polyethylene terephthalate.

The pockets comprise opposed rectangular faces which are separable at least along one side edge for insertion of the transparency therebetween. The phrase "along one side edge" includes embodiments where the flap is attached along and coextensive with the longitudinal side edge of the pocket, as well as those where they are spaced a distance from the same side edge as disclosed in



-11-

U.S. Patent No. 4,402,585, such that in the unfolded position the flap extends beyond and covers the longitudinal edge. In the folded position the flap exposes the side edge. Where desired, the flap can also  
5 be attached along the short side edge.

Holes may be punched along the side edge of the pocket to permit storage of these pockets in a binder, file or the like.

10

### Test Methods

#### Flexibility Measurement

The flexibility of the adhesive tape is measured with a Sherr-Tumico tension gauge having a range of measurement from 0.6 to 6.0 grams of tensions. A driven  
15 platen is used to maintain a constant and reproducible speed of 30.5 cm/minute (12 inches/minute). Samples are measured using white polyvinyl chloride flaps having dimensions of 4.5 cm X 29 cm and thickness of 120 micrometers. The flaps weigh 2.1 grams. The flap is  
20 attached to a pocket using the tape to be tested. The sample is placed, flap side up, on a flat surface with the flap opened at a 90° angle from the sleeve. The sample is set so that when the platen starts moving, the tension gauge arm will engage the flap by approximately  
25 0.65 cm. (The flap extends 0.65 cm into the path of the arm,), and at a position 2.54 cm above the flap/pocket intersection. The tension gauge is mounted on the driven platen so that it is moving at 30.5 cm per minute when it engages the flap. The platen is started and the tension  
30 gauge moves horizontally until it engages the flap and forces it to open further. The maximum tension is read from the gauge after it clears the flap. The result is reported in grams. Results are comparable for flaps having a weight specified above. If testing is desired  
35 for flaps having other weights, the results should be specified in grams per unit weight or unit area.

---

This Sheet Has Been Replaced

-12-

180° Peel

Peel adhesion is measured using an SP-102B-3M90 Extended Capability Slip/Peel tester, marketed by IMASS, Inc. The instrument is set up as follows: platen speed of 30.5 cm/minute, averaging time selector set to 10 seconds, peak select set to kinetic, meter select switch to peak, speed range selector to SL, and range/zero switch to B. A sample is cut parallel to the tape so that the flap, tape and pocket are intact when testing a commercially available example. The tape is applied directly to either the flap or the pocket alone for all other samples. Results are specified as being peel from PET if from the pocket, PVC for peel from the flap or both.

To measure peel adhesion of the hinge to the pocket, the sample is secured to the platen with double coated tape and the flap is peeled from the pocket to a distance of 2.54 cm. The flap is attached to the load cell on the peel tester and the platen is started. As the platen moves, the flap is peeled from the pocket and the force is measured by the load cell and displayed in grams. Peel adhesion to the flap is measured by peeling the tape from the flap. Peel adhesion is reported in grams/cm, and represents the average of 4 measurements.

ADHESIVE TRANSFER TEST

A 3M Model 2150 Overhead Projector was used to observe adhesive transfer in the following manner:

The overhead projector was turned on and allowed to warm for 30 minutes. A 4 cm sample, cut perpendicular to the hinge, so that the hinge, pocket and flap interaction was intact, was placed on the stage, face down, with the flap in the open position. A cylindrical brass weight having a diameter of 3.8 cm and weighing 100 grams was placed and centered on open hinge and let stand for 1 minute. The sample was then pulled across the stage at a rate of 30.5 cm per minute (12 inches per minute) in such



-13-

a direction that the flap was forced to open further to expose the adhesive. Three samples were tested unless otherwise noted. The result was reported as P/3 if no adhesive residue was left on stage, if adhesive residue was left on stage, the result was reported as F/3. The sample is deemed to be acceptable if two of three samples do not leave residue.

The following examples are meant to be illustrative only. Variations within the spirit of the invention are possible as understood by those skilled in the art. The scope of the invention is that contained in the claims.

### Examples

#### Example 1

A pocket for overhead transparencies was made in the following manner. A hot melt pressure-sensitive adhesive, available as Findley 590-371 was coated by means of a Nordson Slot Nozzle Coater at a thickness of 18 micrometers onto a 9.0 micrometer polyethylene terephthalate (PET) film. The film had been previously slit to a width of 1.25 centimeters. The tape was applied to a transparent PET pocket. The flaps, made of TiO<sub>2</sub> filled PVC film having dimensions of 4.5 cm X 29 cm and thickness of 120 micrometers were attached to the pocket using the above tape. The finished pocket is then tested for 180° peel adhesion, adhesive transfer, and flexibility according to the methods described above and the test results were reported in Table 1.

#### Example 2

This envelope was made in the same manner as Example 1, except that the adhesive layer was an acrylate adhesive comprising 95.5 parts isooctyl acrylate (IOA) and 4.5 parts acrylic acid (AA), coated out of solvent (27% solids in ethyl acetate) at a dry thickness of 12.5 micrometers which was coated using a knife coater onto a 6 micrometer PET backing. The tape was then used to



-14-

attach the flaps to the edge of the pocket. The tape was tested for peel, flexibility and adhesive transfer. The peel test was performed on a complete envelope rather than a cut sample as described above. The measurements  
5 are also reported in Table 1.

#### Examples 3-6

These were made in the same manner as example 2, except that different adhesive and backing thicknesses  
10 were used, as shown in Table 1. The peel, adhesive transfer and flexibility measurements were made, with the peel tests being performed on complete envelopes, and the results are shown in Table 1. Peel adhesion of example 5 was tested on the pocket.

15

#### Example 7

This envelope was made in the same manner as Example 1, except that the adhesive was an acrylate adhesive comprising 90 parts IOA, and 10 parts AA in ethyl  
20 acetate/ toluene solvent at 29% solids. This was coated using a knife coater onto a 6 micrometer thick poly(ethylene terephthalate) backing to an adhesive thickness of 18 micrometers. The peel, adhesive transfer and flexibility data are included in Table 1.

25

#### Example 8C

This example was a commercially available Flip-Frame™ product, available from 3M, with an acrylate adhesive comprising 95.5 parts IOA and 4.5 parts AA,  
30 coated out of solvent (27% solids in a 70/30 mixture of heptane/isopropanol) at a coating weight of 32 g/m<sup>2</sup>. The backing for the tape was a 130 μm thick rayon non-woven sheet. The envelope was tested for peel, adhesive transfer and flexibility, and the test results are also  
35 reported in Table 1.

---

This Sheet Has Been Replaced

-15-

Examples 9-12 and 13C

These were made in the same manner as example 7 except the different adhesive thicknesses were used. For example 13C, the adhesive thickness was outside the  
5 limits of the invention. These samples were also tested for peel, adhesive transfer and flexibility and the results reported in Table 1.

Examples 14-19

10 These samples were made in the same manner as Example 7 except the different adhesive thicknesses were used. These samples were also tested for peel, adhesive transfer and flexibility and the results reported in  
15 Table 2. In example 16, the peel adhesion was tested on the pocket.

Examples 20-23

These samples were made in the same manner as Example 1 except that different adhesive and backing  
20 thicknesses were used. The compositions are reported in Table 2. These samples were also tested for peel, adhesive transfer and flexibility and the results are also reported in Table 2.

25

Examples 24-27

These examples were made in a manner similar to Example 1, except that different adhesives were used. The compositions are reported in Table 3. These samples were also tested for peel, adhesive transfer and  
30 flexibility and the results are also reported in Table 3.



TABLE 1

| EXAMPLE | FLEXIBILITY<br>(g) | BACKING<br>THICKNESS<br>( $\mu$ m) | ADHESIVE<br>THICKNESS<br>( $\mu$ m) | 180° PEEL<br>(g/125mm) |      | ADHESIVE<br>TRANSFER |
|---------|--------------------|------------------------------------|-------------------------------------|------------------------|------|----------------------|
|         |                    |                                    |                                     | PVC                    | PET  |                      |
| 1       | 0.9                | 9.0                                | 18.0                                | 682                    | 616  | 3P/3                 |
| 2       | 0.6                | 6.0                                | 12.5                                | 335                    | 393  | 3P/3                 |
| 3       | 1.1                | 9.0                                | 18.0                                | 311                    | 316  | 3P/3                 |
| 4       | 1.0                | 9.0                                | 40.6                                | 547                    | 492  | 3P/3                 |
| 5       | 1.0                | 9.0                                | 5.0                                 | 190                    | 217  | 2P/3                 |
| 6       | 1.7                | 11.7                               | 5.0                                 | -                      | -    | 3P/3                 |
| 7       | 0.7                | 6.0                                | 18.0                                | 410                    | 359  | 3P/3                 |
| 8-C     | 4.1                | 130                                | ***                                 | 712                    | 218  | 5F/5*                |
| 9       | 1.0                | 9.0                                | 15.0                                | 299                    | 295  | 2P/3                 |
| 10      | 1.0                | 9.0                                | 22.9                                | 386                    | 394  | 2P/3                 |
| 11      | 0.8                | 9.0                                | 12.5                                | -                      | -    | 3P/3                 |
| 12      | 1.4                | 9.0                                | 73.7                                | 674                    | 588  | 3P/3                 |
| 13      | 1.0                | 9.0                                | 100.0                               | 1449                   | 1382 | 3P/4**               |

\* 5 samples were tested

\*\* 4 samples were tested

\*\*\* Unable to determine actual thickness since some adhesive becomes embedded in backing coating weight: 32 g/m<sup>2</sup>

TABLE 2

| EXAMPLE | ADHESIVE FORMULATION                                                 | FLEXIBILITY<br>(g) | BACKING<br>THICKNESS<br>( $\mu$ m) | ADHESIVE<br>THICKNESS<br>( $\mu$ m) | 180° PEEL<br>(g/125mm)<br>PVC | 180° PEEL<br>(g/125mm)<br>PET | ADHESIVE<br>TRANSFER |
|---------|----------------------------------------------------------------------|--------------------|------------------------------------|-------------------------------------|-------------------------------|-------------------------------|----------------------|
| 14      | IOA/ACM <sup>21†</sup><br>(94/6) solid in<br>ethylacetate/heptane    | 1.0                | 9.0                                | 15                                  | 314                           | 302                           | 3P/3                 |
| 15      | IOA/ACM <sup>21†</sup><br>(94/6) solid in<br>ethylacetate/heptane    | 0.9                | 9.0                                | 15                                  | 325                           | 299                           | 3P/3                 |
| 16      | IOA/ACM <sup>21†</sup><br>(94/6) solid in<br>ethylacetate/heptane    | 1.8                | 11.7                               | 2.5                                 | 171                           | 149                           | 2P/3                 |
| 17      | 2-methylbutyl<br>acrylate/AA (90/10)<br>40% solid in<br>ethylacetate | 1.2                | 9.0                                | 18                                  | 343                           | 288                           | 3P/3                 |
| 18      | IOA/AA (98/2)<br>26% solid in<br>ethylacetate                        | 1.0                | 9.0                                | 22.5                                | 407 <sup>*</sup>              | 342                           | 2P/3                 |
| 19      | Findley 590-371                                                      | 0.8                | 9.0                                | 45.7                                | 1112                          | 1020                          | 3P/4 <sup>+</sup>    |
| 20      | Findley 590-371                                                      | 1.8                | 11.7                               | 20.0                                | 760                           | 697                           | 3P/4 <sup>+</sup>    |
| 21      | Findley 590-371                                                      | 1.8                | 11.7                               | 5.0                                 |                               |                               | P/1 <sup>++</sup>    |
| 22      | IOA/OA/SSS<br>(87/12/1) <sup>***</sup>                               | 1.1                | 9.0                                | 20.0                                | 220                           | 239                           | 3P/3                 |

\* Average of 3 only

\*\* Acrylamide

\*\*\* Isooctyl/N-(octyl)acrylamide/sodium styrene sulfonate

+ 4 samples were tested

++ Only 1 sample was tested



TABLE 3

| EX. | ADHESIVE FORM.                       | FLEXIBILITY | BACKING THICKNESS ( $\mu\text{m}$ ) | ADHESIVE THICKNESS ( $\mu\text{m}$ ) | 180° PEEL (g/125mm) |      | ADHESIVE TRANSFER |
|-----|--------------------------------------|-------------|-------------------------------------|--------------------------------------|---------------------|------|-------------------|
|     |                                      |             |                                     |                                      | PVC                 | PET  |                   |
| 23  | H2104 <sup>1</sup>                   | 1.4         | 9.0                                 | 29.1                                 | 1459                | 1333 | 3P/3              |
| 24  | INSTANT-<br>LOK 34-2789 <sup>2</sup> | 1.9         | 9.0                                 | 11.3                                 | 288                 | 280  | 3P/3              |
| 25  | EASTOBOND<br>A-747S <sup>3</sup>     | 1.8         | 9.0                                 | 26.6                                 | 1158                | 1017 | 3P/3              |
| 26  | DURO-LAM<br>34-4295 <sup>2</sup>     | 2.4         | 9.0                                 | 11.3                                 | 435                 | 111  | 3P/3              |

<sup>1</sup>Available from Findley Chemical<sup>2</sup>Available from National Starch and Chemical Co.<sup>3</sup>Available from Eastman Kodak

This Sheet Has Been Replaced





-19-

**What is Claimed is:**

1. An improved envelope for transparencies for overhead projectors, said envelope comprising a substantially rectangular pocket of transparent sheet material, said pocket having two longitudinal side edges connected by shorter side edges, said pocket being open at least along one side edge for insertion of a transparency, at least one opaque flap attached in a foldable manner along one of said side edges by means of a flexible adhesive tape, said flap having a folded and an unfolded position, said tape comprising a flexible polyester backing having a thickness of less than 15 micrometers, and attached on one surface thereof, an adhesive layer, wherein said tape has a flexibility measurement of not more than 2.5 grams, and a 180° peel adhesion of at least 100 grams per centimeter, said flap being capable of remaining in the unfolded position on an overhead projector stage with minimal adhesive transfer to said stage at the operating temperature of the overhead projector.

2. An improved envelope according to claim 1 wherein said polyester backing is poly(ethylene terephthalate), said backing having a thickness of from 5 micrometers to 10 micrometers.

3. An improved envelope according to claim 1 wherein said adhesive is a rubber resin adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.

This Sheet Has Been Replaced





-20-

4. An improved envelope according to claim 3 wherein said adhesive is a tackified styrene-butadiene-styrene copolymer.

5. An improved envelope according to claim 1 wherein said adhesive is an acrylic adhesive comprising isooctyl acrylate and acrylic acid.

6. An adhesive tape suitable for use in an improved envelope for overhead transparencies according to claim 1, said envelope having at least one opaque flap, such tape comprising a flexible polyester backing material having a thickness of less than 15 micrometers, and coated on one surface of said backing is a flexible adhesive layer wherein said tape has a flexibility measurement of not more than 2.5 grams, and a 180° peel adhesion of at least 100 grams per centimeter, wherein said tape will exhibit minimal transfer to an overhead projector stage at the operating temperature of the overhead projector.

7. An adhesive tape according to claim 6 wherein said backing material comprises polyethylene terephthalate, and said adhesive layer comprises a rubber type adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.

8. An adhesive tape according to claim 6 wherein said adhesive is an acrylic adhesive comprising isooctyl acrylate and acrylic acid.

---

This Sheet Has Been Replaced




-21-

9. An adhesive tape according to claim 6 wherein said tape has a thickness less than 90 micrometers, wherein said backing comprises from 5 to 15 micrometers.
- 5      10. An adhesive tape according to claim 6 wherein said tape has a thickness less than 25 micrometers, wherein said backing comprises from 5 to 10 micrometers.

---

This Sheet Has Been Replaced





## AMENDED CLAIMS

[received by the International Bureau on 24 March 1993(24.03.93); original claims 1 and 6 amended; remaining claims unchanged (2 pages)]

1. An improved envelope for transparencies for overhead projectors, said envelope comprising a substantially rectangular pocket of transparent sheet material, said pocket having two longitudinal side edges connected by shorter side edges, said pocket being open at least along one side edge for insertion of a transparency, at least one opaque flap having light scattering, light blocking or light reflecting properties such that a majority of light entering said flap is not transmitted therethrough, said flap being attached in a foldable manner along one of said side edges by means of a flexible adhesive tape, said flap having a folded and unfolded position, said tape comprising a flexible polyester backing having a thickness of less than 15 micrometers, and attached on one surface thereof, an adhesive layer, wherein said tape has a flexibility measurement of not more than 2.5 grams, and a 180° Peel adhesion of at least 100 grams per centimeter, said flap being capable of remaining in the unfolded position on an overhead projector stage with minimal adhesive transfer to said stage at the operating temperature of the overhead projector.

25

2. An improved envelope according to claim 1 wherein said polyester backing is poly(ethylene terephthalate), said backing having a thickness of from 5 micrometers to 10 micrometers.

30

3. An improved envelope according to claim 1 wherein said adhesive is a rubber resin adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.





4. An improved envelope according to claim 3 wherein said adhesive is a tackified styrene-butadiene-styrene copolymer.

5 5. An improved envelope according to claim 1 wherein said adhesive is an acrylic adhesive comprising isooctyl acrylate and acrylic acid.

6. An adhesive tape suitable for use in an improved  
10 envelope for overhead transparencies, having at least one opaque flap having light scattering, light blocking or light reflecting properties such that a majority of light entering said flap is not transmitted therethrough, such tape comprising a flexible polyester backing material  
15 having a thickness of less than about 15 micrometers, and coated on one surface of said backing is a flexible adhesive layer wherein said tape has a flexibility measurement of not more than about 2.5 grams, and a 180° peel adhesion of at least about 100 grams per centimeter,  
20 wherein said tape will exhibit minimal transfer to an overhead projector stage at the operating temperature of the overhead projector.

7. An adhesive tape according to claim 6 wherein  
25 said backing material comprises polyethylene terephthalate, and said adhesive layer comprises a rubber type adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof,  
30 polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.

35 8. An adhesive tape according to claim 6 wherein said adhesive is an acrylic adhesive comprising isooctyl acrylate and acrylic acid.

This Sheet Has Been Replaced



| REPLACED SHEETS                     |                                           | SG |
|-------------------------------------|-------------------------------------------|----|
| <input type="checkbox"/>            | Description : paged ..... to paged .....  |    |
| <input checked="" type="checkbox"/> | Claim(s) : paged ..11... to paged ..12... |    |
| <input type="checkbox"/>            | Drawing(s) : paged ..... to paged .....   |    |
| <input type="checkbox"/>            | Abstract : paged ..... to paged .....     |    |
| DATE OF RECEIPT .....               |                                           |    |

904719-1 106

| REPLACEMENT SHEETS                  |                                               | SG |
|-------------------------------------|-----------------------------------------------|----|
| <input checked="" type="checkbox"/> | Description : paged ...1... to paged ...12... |    |
| <input checked="" type="checkbox"/> | Claim(s) : paged ...11... to paged ...12...   |    |
| <input type="checkbox"/>            | Drawing(s) : paged ..... to paged .....       |    |
| <input type="checkbox"/>            | Abstract : paged ..... to paged .....         |    |
| DATE OF RECEIPT ..19/10/76.....     |                                               |    |

- 1 -

ENVELOPE FOR TRANSPARENCY HAVING INCREASED FLEXIBILITY

Background of the Invention

Field of the Invention

5

The invention relates to an envelope for holding transparencies used in overhead projectors. Specifically, the envelopes include at least one opaque flap attached to the envelope using an adhesive tape

10 having increased flexibility.

Description of the Related Art

Business presentations, lectures and the like often are augmented by the use of imaged transparencies, which are exhibited to the viewers on a screen by means of an overhead projector (OHP). The individual transparencies are delicate, and easily damaged in storage or transit. Various types of covers, folders and envelopes have been provided in order to enable professional presentations, as well as interim protection of the transparencies.

U.S. Patent No. 3,875,693 discloses the framing of a transparency in a frame made from carton, paperboard and the like. The frame is meant to mask the illumination gaps formed about the peripheral of the transparency proper. The frame can also be used to make notes or other memoranda needed by the lecturer which remain unseen by the audience. However, these frames are bulky and will not fit into standard size files, binders and shelves, being therefore difficult to store and transport. Also, they are not easily removable without destruction of the frame and attendant damage to the transparency. Finally, the frames are not convenient to attach to transparencies as each one must be carefully positioned and attached by hand.

Swedish Patent Application No. 382,266 discloses an envelope which is a plastic sheet pocket having punched holes along one side, and being open at the top for insertion of the transparency to be presented. These envelopes are removable, simple to handle, store and

19 OCT 1996

-2-

transport as the outer dimensions are those of standard binders or files. Moreover, the transparency is protected by the envelope and at the presentation, notes can be made on the envelope.

5       The disadvantage of this envelope is that peripheral illumination is not masked and the lecturer cannot make written notes on the envelopes without having these notes being shown on the screen as well. The punched holes also show an outline on the screen. Therefore, this  
10 envelope does not yield a presentation having an extremely professional appearance.

U.S. Patent Nos. 3,253,358; 3,264,936; 3,438,702; 3,438,703; 3,524,703; 3,536,393; 3,537,792; 3,544,211; 3,600,079; and Swedish Patent Application No. 346,166  
15 describe further examples of covers or envelopes for OHP transparencies. The covers and envelopes disclosed in these publications are complicated and difficult to handle and have many drawbacks, e.g., most of these presuppose that the transparencies are to be presented in  
20 a prescribed order and the covers of most of these transparencies are difficult to remove.

U.S. Patent No. 4,810,544 discloses another transparent sleeve comprising a transparent sheet material having a single fold dividing the sheet into two  
25 halves, and a strip of double coated adhesive tape running the length of an edge of the sheet substantially parallel to the fold. The tape is disclosed to have a low tack, reusable adhesive on the side of the tape which will adhere to the top strip. When folded, the single  
30 sheet forms a sleeve. This envelope protects the printed media, and can be stored in a binder when holes are punched along the edge, but again, any written notes or prompts will be visible on the screen.

U.S. Patent No. 4,402,585 discloses an envelope for  
35 overhead transparencies that overcomes many of the disadvantages of the previously described envelopes. The envelope comprises a rectangular pocket formed of

19 OCT 1996

-3-

transparent sheet material defining opposed rectangular faces which are separable along at least one side edge for insertion of the transparency therebetween. At least one opaque flap is attached in a foldable manner along one of the longitudinal side edges of the pocket. The flap is attached to and spaced a distance from the longitudinal edge such that in the unfolded position the flap extends beyond the side edge and covers the longitudinal edge. In the folded position, the flap exposes the longitudinal side edge. Holes may be punched along the side edge of the material to permit storage of the envelope in a binder, file or the like. Preferably, the flaps are formed of a plastic material which accepts written text by conventional writing instruments.

When stored, the flaps are in the folded position, and are unfolded for use. The means of attachment must allow the flaps to stay in the unfolded position during presentation. Otherwise the flaps might tend to spring back to their folded position, which is inconvenient for the presenter, and may cover the added notes. To aid the situation, the envelope can be placed with the flaps face down on the overhead projector stage, so that the weight of the envelope and the overhead transparency can insure that the flaps stay unfolded. However, where flaps are difficult to fold, the envelope will not lay flat on the stage, which can cause focusing problems, which are especially severe when one uses a reflective type overhead projector. In addition, due to the operating temperature of the OHP and stage, the adhesive used to attach the flap can be transferred to the stage, causing unsightly spots on the screen and messy blotches on the stage which can also transfer to materials used thereafter.

The present inventors have discovered that, by using a certain combination of backing film and adhesive, the flaps can be securely attached to the transparent envelope, easily remaining in either the folded or the

19 OCT 1996

-4-

unfolded or open position. This obviates the need to turn the envelopes face down on the stage. Further, with the preferred composite tapes, the envelopes can be turned face down and lay flat on the stage with minimal adhesive transfer.

#### Summary of the Invention

The present invention comprises an improved envelope for transparencies for overhead projectors, said envelope comprising a substantially rectangular pocket of transparent sheet material, said pocket having two longitudinal side edges connected by shorter side edges, said pocket being open at least along one side edge for insertion of a transparency, at least one opaque flap attached in a foldable manner along one of said side edges by means of a flexible adhesive tape, said flap having a folded and an unfolded position, said tape comprising a flexible polyester backing having a thickness of 15 micrometers or less, and attached on one surface thereof, an adhesive layer, wherein said tape has a flexibility measurement of not more than 2.5 grams, and a 180° peel adhesion of at least 100 grams per centimeter, wherein the flap, when unfolded, remains in the unfolded position, and when turned face down on an overhead projector stage will exhibit minimal adhesive transfer to said stage at the operating temperature of the overhead projector.

This invention also provides an adhesive tape suitable for use in an improved envelope for overhead transparencies, having at least one opaque flap, such tape comprising a flexible polyester material having a thickness of less than 15 microns, and coated on one surface of said backing is a flexible adhesive layer wherein said composite tape has a flexibility measurement of not more than 2.5 grams, and a 180° peel adhesion of at least 100 grams per centimeter, wherein said tape will

19 OCT 1996

-5-

exhibit minimal transfer to an overhead projector stage at the operating temperature of the overhead projector.

The term "adhesive tape" as used herein means an adhesive which is positioned on, or coated as a layer on, at least one major surface of a polyester substrate. The adhesive may be pressure-sensitive, heat-activatable, heat-bondable, or any other type of known adhesive. The tape may be premade and placed onto the envelope during construction thereof, or it may be made concurrently with the envelope, or after the envelope is constructed, by coating the chosen adhesive onto a polyester material which has already been placed in the envelope.

#### Detailed Description of the Invention

The improved envelopes of the invention comprise an adhesive tape having a polyester backing having a thickness of 15 micrometers or less, preferably from 5 micrometers to 10 micrometers. The backing may be any thermoplastic film forming polyester produced by condensing a dicarboxylic acid or a lower alkyl diester thereof, e.g., terephthalic acid, isophthalic, phthalic 2,5-naphthalene dicarboxylic acid, succinic acid, adipic acid, and the like, with a glycol such as ethylene glycol, 1,3-propanediol, 1,4-butanediol, and the like. The polyester may also be a copolyester of any such acid and glycol. The preferred polyester is poly(ethylene terephthalate) for its clarity, durability and cost.

Useful adhesives for the adhesive layer of such tape are those having good adhesion to the polyester backing, and the envelope, and include acrylics, tackified or untackified, tackified rubber-based adhesives, urethanes, silicones and the like. They can be hot melt adhesives, solvent-based, water-based, or emulsion, E-beam or actinic radiation curable or moisture curable.

The thickness of the adhesive layer depends on such factors as the type of adhesive used and the type and thickness of the film backing, however, the thicknesses

19 OCT 1996

-6-

of the adhesive layer typically range from 2.5 micrometers to 100 micrometers, preferably from 5 micrometers to 75 micrometers, most preferably from 10 to 25 micrometers. While some of the preferred adhesives  
5 can be coated on the required backing up to 100 micrometers in thickness without causing excessive adhesive transfer, this thickness is generally not preferred from resource management and aesthetic perspectives.

10 At the preferred thickness range, the adhesive layer has a 180° peel adhesion of at least 100 grams per centimeter (under conditions specified, infra), for the flaps to remain securely attached to the edges of the pocket. When adhesives with lower peel adhesion values  
15 are used, the adhesive will tend to separate from the edges of either the main pocket or the flap after repeated opening and closing of the flaps and expose more of the adhesive layer for adhesive transfer to the stage if the flaps are placed face down.

20 The adhesives can be pressure-sensitive, heat activatable pressure-sensitive, or heat bonding with the pressure-sensitive and heat-activatable pressure-sensitive being preferred. Also useful are heat-set adhesives including thermoplastic and thermosetting  
25 resins, which have the advantages of good bonding strength to prevent separation of the adhesive, and are nontacky at the operating temperature of the overhead projector, so long as they meet the flexibility and peel requirements necessary. Useful pressure-sensitive  
30 adhesives possess good bonding and low creep properties, while remaining flexible, which is one requirement so that when the flap is in the unfolded position, there will be less tendency for the adhesive to creep onto the stage or other surface contacted. The thin backing of  
35 the tape and resultant flexibility provides a smaller exposed area when the flap is in the unfolded position. Minimal adhesive layer thickness also helps in minimizing

19 OCT 1996

-7-

amount of adhesive which is exposed when the flap is in the unfolded position. These factors, along with the adhesive properties substantially reduce the amount of adhesive transfer when compared to conventional products.

5 Other helpful procedures include detackifying the exposed adhesive edge along the fold line, coating variations and the like. Useful detackifying treatments include treating the exposed edges with E-beam or the addition of an appropriate chemical compound to either  
10 coat or react with the adhesive.

Preferred adhesives include acrylics and tackified rubber-based adhesives. For the preferred adhesives, a very thin layer of 10 micrometers can provide the required peel adhesion.

15 One preferred class of pressure-sensitive adhesives are acrylate adhesives. They can be monomers and/or oligomers such as (meth)acrylates, (meth)acrylamides, vinyl pyrrolidone and azlactones, as disclosed in U.S. Pat. No. 4,304,705, (Heilmann), Re 24,906 (Ulrich), and  
20 U.S. 4,181,752, (Martens). Such monomers include mono-, di-, or poly-acrylates and methacrylates.

Preferred acrylates are typically alkyl acrylates, preferably monofunctional unsaturated acrylate esters of non-tertiary alkyl alcohols, the alkyl groups of which  
25 have from 1 to 14 carbon atoms. Included with this class of monomers are, for example, isooctyl acrylate, isononyl acrylate, 2-ethyl-hexyl acrylate, decyl acrylate, dodecyl acrylate, n-butyl acrylate, and hexyl acrylate. The alkyl acrylate monomers can be used to form homopolymers  
30 or they can be copolymerized with polar copolymerizable monomers. When copolymerized with strongly polar monomers such as monoolefinic mono- and dicarboxylic acids, hydroxyalkyl acrylates, cyanoalkyl acrylates, acrylamides or substituted acrylamides, the alkyl  
35 acrylate monomer generally comprises at least 75% of the polymerizable monomer composition. When copolymerized with moderately polar monomers such as N-vinyl

19 OCT 1996

-8-

pyrrolidone, acrylonitrile, vinyl chloride or diallyl phthalate, the alkyl acrylate monomer generally comprises at least 70% of the polymerizable monomer composition.

The pressure-sensitive adhesive typically contains at least one initiator to aid in polymerization of the monomers. Suitable initiators include thermally-activated initiators such as azo compounds, hydroperoxides, peroxides, and the like, and photoinitiators such as the benzoin ethers, substituted benzoin ethers, substituted acetophenones, substituted alpha-ketols such as 2-methyl-2-hydroxy-propiophenone, aromatic sulphonyl chlorides such as 2-naphthalene sulphonyl chloride, and photoactive oximes such as 1-phenyl-1,1-propanedione-2-(O-ethoxycarbonyl) oxime. Generally, the initiator is present in an amount of from 0.01 part to 3.0 parts based on 100 parts monomer weight.

The pressure-sensitive adhesive layer may also be cross-linked. Preferred crosslinking agents for acrylic pressure-sensitive adhesives are multiacrylates such as 1,6-hexanediol diacrylate as well as those disclosed in U.S. Patent No. 4,379,201 (Heilmann et al.). Other useful crosslinking agents include those chromophore substituted-s-triazines taught in U.S. Patents 4,330,590 (Vesley), and 4,329,384 (Vesley et al.). Each of the crosslinking agents is useful in the range of from 0.01% to 1% of the total weight of the monomers.

Useful heat activatable adhesives include thermoplastic and thermosetting resins. Another preferred class of adhesives is that of rubber-type adhesives. The adhesives comprise a rubber resin, which may be either a natural rubber or a synthetic elastomer such as styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and the like.

19 OCT 1996

-9-

Mixtures of such rubber resins may also be used. Such resins are available commercially under such trade names as Kraton™ e.g., Kraton™ G1657, D1101, D1107, and 1118, all available from Shell Chemical Co., Stereon™, e.g.,  
5 Stereon™ 840A, and 845A, and Duradene™ e.g., Duradene™ 710, 711, and 713, all available from Firestone Tire and Rubber, and those available from BF Goodrich under the tradename Hycar™, and the like.

Such rubber-type adhesives typically also contain a  
10 tackifying agent. Useful tackifying agents include rosin esters and rosin acids, mixed aliphatic/aromatic tackifying resins, polyterpene tackifying agents, and hydrogenated tackifying agents. Preferred tackifying agents include the aliphatic hydrocarbon resins, the  
15 polyterpene resins and the hydrogenated resins. Mixtures of tackifying agents may also be used.

Rubber-type adhesives may also contain a plasticizing agent including naphthionic oils, paraffinic oils, aromatic oils and mineral oils.

20 Useful commercially available adhesives include Findley "590-371", and "802-334"; "HL-2203-X", "HM-2703", "HL-7389-X", available from H.B. Fuller; and "70-7141", and "70-7254", available from National Starch. Any  
25 useful adhesive may also contain such conventional additives as pigments, antioxidants, fillers, and the like, so long as such additives do not render the adhesive outside the flexibility and peel ranges required.

The adhesive chosen must have good bonding to the  
30 film backing, either as provided or the surface of the film backing can alternately be treated either by corona treatment or chemical adhesion promoters to insure good bonding. The composite tape has a flexibility measurement of no more than 2.5 grams as measured *infra*,  
35 preferably no more than 1.6 grams. Preferred adhesives also have a 180° peel adhesion of at least 100 grams per centimeter, preferably at least 150 grams per centimeter;

19 OCT 1996

-10-

and a composite thickness of less than 90 micrometers, preferably less than 40 micrometers.

The flexibility measurement requirement can be as low as possible, but in practice, measurements of lower  
5 than 1 gram become difficult to test. A tape with very low flexibility numbers, or outside the testing range is useful if it has adequate peel, and adequate integrity needed for the equipment processing and handling. At  
10 measurements higher than 2.5 grams, the flaps are difficult to unfold and will tend not to remain in the opened or unfolded position and to spring back to the closed position.

The backing can also have low adhesion backsize coating thereon or any other treatment to facilitate  
15 unwinding from a roll, so long as such treatments do not render the tape outside the flexibility range.

The flaps are preferably made from materials that are capable of being overwritten to enable the lecturer to make notes thereon, including bond paper, paperboard,  
20 opaque films such as pigment filled polyester; polyvinylchloride; polyolefins including polyethylene and polypropylene; and other similar materials, with polyvinyl chloride being preferred.

The pockets can be made from any transparent  
25 polymeric sheet material including cellulose esters, polyesters such as polyethylene terephthalate, polyamides such as nylon, polyolefins such as polyethylene and polypropylene, polycarbonates, polyethers and polyvinyls such as polyvinylchloride. Polyesters are preferred,  
30 most preferably polyethylene terephthalate.

The pockets comprise opposed rectangular faces which are separable at least along one side edge for insertion of the transparency therebetween. The phrase "along one side edge" includes embodiments where the flap is  
35 attached along and coextensive with the longitudinal side edge of the pocket, as well as those where they are spaced a distance from the same side edge as disclosed in

19 OCT 1996

-11-

U.S. Patent No. 4,402,585, such that in the unfolded position the flap extends beyond and covers the longitudinal edge. In the folded position the flap exposes the side edge. Where desired, the flap can also  
5 be attached along the short side edge.

Holes may be punched along the side edge of the pocket to permit storage of these pockets in a binder, file or the like.

10

### Test Methods

#### Flexibility Measurement

The flexibility of the adhesive tape is measured with a Sherr-Tumico tension gauge having a range of measurement from 0.6 to 6.0 grams of tensions. A driven  
15 platen is used to maintain a constant and reproducible speed of 30.5 cm/minute (12 inches/minute). Samples are measured using white polyvinyl chloride flaps having dimensions of 4.5 cm X 29 cm and thickness of 120 micrometers. The flaps weigh 2.1 grams. The flap is  
20 attached to a pocket using the tape to be tested. The sample is placed, flap side up, on a flat surface with the flap opened at a 90° angle from the sleeve. The sample is set so that when the platen starts moving, the tension gauge arm will engage the flap by approximately  
25 0.65 cm. (The flap extends 0.65 cm into the path of the arm,), and at a position 2.54 cm above the flap/pocket intersection. The tension gauge is mounted on the driven platen so that it is moving at 30.5 cm per minute when it engages the flap. The platen is started and the tension  
30 gauge moves horizontally until it engages the flap and forces it to open further. The maximum tension is read from the gauge after it clears the flap. The result is reported in grams. Results are comparable for flaps having a weight specified above. If testing is desired  
35 for flaps having other weights, the results should be specified in grams per unit weight or unit area.

19 OCT 1996

-12-

180° Peel

Peel adhesion is measured using an SP-102B-3M90 Extended Capability Slip/Peel tester, marketed by IMASS, Inc. The instrument is set up as follows: platen speed of 30.5 cm/minute, averaging time selector set to 10 seconds, peak select set to kinetic, meter select switch to peak, speed range selector to SL, and range/zero switch to B. A sample is cut parallel to the tape so that the flap, tape and pocket are intact when testing a commercially available example. The tape is applied directly to either the flap or the pocket alone for all other samples. Results are specified as being peel from PET if from the pocket, PVC for peel from the flap or both.

To measure peel adhesion of the hinge to the pocket, the sample is secured to the platen with double coated tape and the flap is peeled from the pocket to a distance of 2.54 cm. The flap is attached to the load cell on the peel tester and the platen is started. As the platen moves, the flap is peeled from the pocket and the force is measured by the load cell and displayed in grams. Peel adhesion to the flap is measured by peeling the tape from the flap. Peel adhesion is reported in grams/cm, and represents the average of 4 measurements.

25

ADHESIVE TRANSFER TEST

A 3M Model 2150 Overhead Projector was used to observe adhesive transfer in the following manner:

The overhead projector was turned on and allowed to warm for 30 minutes. A 4 cm sample, cut perpendicular to the hinge, so that the hinge, pocket and flap interaction was intact, was placed on the stage, face down, with the flap in the open position. A cylindrical brass weight having a diameter of 3.8 cm and weighing 100 grams was placed and centered on open hinge and let stand for 1 minute. The sample was then pulled across the stage at a rate of 30.5 cm per minute (12 inches per minute) in such

19 OCT 1996

-13-

a direction that the flap was forced to open further to expose the adhesive. Three samples were tested unless otherwise noted. The result was reported as P/3 if no adhesive residue was left on stage, if adhesive residue was left on stage, the result was reported as F/3. The sample is deemed to be acceptable if two of three samples do not leave residue.

The following examples are meant to be illustrative only. Variations within the spirit of the invention are possible as understood by those skilled in the art. The scope of the invention is that contained in the claims.

### Examples

#### Example 1

A pocket for overhead transparencies was made in the following manner. A hot melt pressure-sensitive adhesive, available as Findley 590-371 was coated by means of a Nordson Slot Nozzle Coater at a thickness of 18 micrometers onto a 9.0 micrometer polyethylene terephthalate (PET) film. The film had been previously slit to a width of 1.25 centimeters. The tape was applied to a transparent PET pocket. The flaps, made of TiO<sub>2</sub> filled PVC film having dimensions of 4.5 cm X 29 cm and thickness of 120 micrometers were attached to the pocket using the above tape. The finished pocket is then tested for 180° peel adhesion, adhesive transfer, and flexibility according to the methods described above and the test results were reported in Table 1.

#### Example 2

This envelope was made in the same manner as Example 1, except that the adhesive layer was an acrylate adhesive comprising 95.5 parts isooctyl acrylate (IOA) and 4.5 parts acrylic acid (AA), coated out of solvent (27% solids in ethyl acetate) at a dry thickness of 12.5 micrometers which was coated using a knife coater onto a 6 micrometer PET backing. The tape was then used to

19 OCT 1996

-14-

attach the flaps to the edge of the pocket. The tape was tested for peel, flexibility and adhesive transfer. The peel test was performed on a complete envelope rather than a cut sample as described above. The measurements  
5 are also reported in Table 1.

#### Examples 3-6

These were made in the same manner as example 2, except that different adhesive and backing thicknesses  
10 were used, as shown in Table 1. The peel, adhesive transfer and flexibility measurements were made, with the peel tests being performed on complete envelopes, and the results are shown in Table 1. Peel adhesion of example 5 was tested on the pocket.

15

#### Example 7

This envelope was made in the same manner as Example 1, except that the adhesive was an acrylate adhesive comprising 90 parts IOA, and 10 parts AA in ethyl  
20 acetate/ toluene solvent at 29% solids. This was coated using a knife coater onto a 6 micrometer thick poly(ethylene terephthalate) backing to an adhesive thickness of 18 micrometers. The peel, adhesive transfer and flexibility data are included in Table 1.

25

#### Example 8C

This example was a commercially available Flip-Frame™ product, available from 3M, with an acrylate adhesive comprising 95.5 parts IOA and 4.5 parts AA,  
30 coated out of solvent (27% solids in a 70/30 mixture of heptane/isopropanol) at a coating weight of 32 g/m<sup>2</sup>. The backing for the tape was a 130 μm thick rayon non-woven sheet. The envelope was tested for peel, adhesive transfer and flexibility, and the test results are also  
35 reported in Table 1.

19 OCT 1996

-15-

Examples 9-12 and 13C

These were made in the same manner as example 7 except the different adhesive thicknesses were used. For example 13C, the adhesive thickness was outside the limits of the invention. These samples were also tested for peel, adhesive transfer and flexibility and the results reported in Table 1.

Examples 14-19

10        These samples were made in the same manner as Example 7 except the different adhesive thicknesses were used. These samples were also tested for peel, adhesive transfer and flexibility and the results reported in Table 2. In example 16, the peel adhesion was tested on  
15        the pocket.

Examples 20-23

20        These samples were made in the same manner as Example 1 except that different adhesive and backing thicknesses were used. The compositions are reported in Table 2. These samples were also tested for peel, adhesive transfer and flexibility and the results are also reported in Table 2.

Examples 24-27

25        These examples were made in a manner similar to Example 1, except that different adhesives were used. The compositions are reported in Table 3. These samples were also tested for peel, adhesive transfer and  
30        flexibility and the results are also reported in Table 3.

19 OCT 1996

TABLE 1

| EXAMPLE | FLEXIBILITY<br>(g) | BACKING<br>THICKNESS<br>( $\mu$ m) | ADHESIVE<br>THICKNESS<br>( $\mu$ m) | 180° PEEL<br>(g/125mm) |      | ADHESIVE<br>TRANSFER |
|---------|--------------------|------------------------------------|-------------------------------------|------------------------|------|----------------------|
|         |                    |                                    |                                     | PVC                    | PET  |                      |
| 1       | 0.9                | 9.0                                | 18.0                                | 682                    | 616  | 3P/3                 |
| 2       | 0.6                | 6.0                                | 12.5                                | 335                    | 393  | 3P/3                 |
| 3       | 1.1                | 9.0                                | 18.0                                | 311                    | 316  | 3P/3                 |
| 4       | 1.0                | 9.0                                | 40.6                                | 547                    | 492  | 3P/3                 |
| 5       | 1.0                | 9.0                                | 5.0                                 | 190                    | 217  | 2P/3                 |
| 6       | 1.7                | 11.7                               | 5.0                                 | -                      | -    | 3P/3                 |
| 7       | 0.7                | 6.0                                | 18.0                                | 410                    | 359  | 3P/3                 |
| 8-C     | 4.1                | 130                                | ***                                 | 712                    | 218  | 5F/5°                |
| 9       | 1.0                | 9.0                                | 15.0                                | 299                    | 295  | 2P/3                 |
| 10      | 1.0                | 9.0                                | 22.9                                | 386                    | 394  | 2P/3                 |
| 11      | 0.8                | 9.0                                | 12.5                                | -                      | -    | 3P/3                 |
| 12      | 1.4                | 9.0                                | 73.7                                | 674                    | 588  | 3P/3                 |
| 13      | 1.0                | 9.0                                | 100.0                               | 1449                   | 1382 | 3P/4**               |

\* 5 samples were tested

\*\* 4 samples were tested

\*\*\* Unable to determine actual thickness since some adhesive becomes embedded in backing coating weight: 32 g/m<sup>2</sup>

19 OCT 1996

- 17 -

TABLE 2

| EXAMPLE | ADHESIVE FORMULATION                                                 | FLEXIBILITY<br>(g) | BACKING<br>THICKNESS<br>( $\mu$ m) | ADHESIVE<br>THICKNESS<br>( $\mu$ m) | 180° PEEL<br>(g/125mm)<br>PVC | 180° PEEL<br>(g/125mm)<br>PET | ADHESIVE<br>TRANSFER |
|---------|----------------------------------------------------------------------|--------------------|------------------------------------|-------------------------------------|-------------------------------|-------------------------------|----------------------|
| 14      | IOA/ACM <sup>**</sup> 21†<br>(94/6) solid in<br>ethylacetate/heptane | 1.0                | 9.0                                | 15                                  | 314                           | 302                           | 3P/3                 |
| 15      | IOA/ACM <sup>**</sup> 21†<br>(94/6) solid in<br>ethylacetate/heptane | 0.9                | 9.0                                | 15                                  | 325                           | 299                           | 3P/3                 |
| 16      | IOA/ACM <sup>**</sup> 21†<br>(94/6) solid in<br>ethylacetate/heptane | 1.8                | 11.7                               | 2.5                                 | 171                           | 149                           | 2P/3                 |
| 17      | 2-methylbutyl<br>acrylate/AA (90/10)<br>40‡ solid in<br>ethylacetate | 1.2                | 9.0                                | 18                                  | 343                           | 288                           | 3P/3                 |
| 18      | IOA/AA (98/2)<br>26‡ solid in<br>ethylacetate                        | 1.0                | 9.0                                | 22.5                                | 407*                          | 342                           | 2P/3                 |
| 19      | Findley 590-371                                                      | 0.8                | 9.0                                | 45.7                                | 1112                          | 1020                          | 3P/4 <sup>+</sup>    |
| 20      | Findley 590-371                                                      | 1.8                | 11.7                               | 20.0                                | 760                           | 697                           | 3P/4 <sup>+</sup>    |
| 21      | Findley 590-371                                                      | 1.8                | 11.7                               | 5.0                                 |                               |                               | P/1 <sup>++</sup>    |
| 22      | IOA/OA/SSS<br>(87/12/1) <sup>***</sup>                               | 1.1                | 9.0                                | 20.0                                | 220                           | 239                           | 3P/3                 |

\* Average of 3 only

\*\* Acrylamide

\*\*\* Isooctyl/N-(octyl)acrylamide/sodium styrene sulfonate

+ 4 samples were tested

++ Only 1 sample was tested

19 OCT 1996

TABLE 3

| EX. | ADHESIVE FORM.                       | FLEXIBILITY | BACKING THICKNESS ( $\mu\text{m}$ ) | ADHESIVE THICKNESS ( $\mu\text{m}$ ) | 180° PEEL (g/125mm) PVC | 180° PEEL (g/125mm) PET | ADHESIVE TRANSFER |
|-----|--------------------------------------|-------------|-------------------------------------|--------------------------------------|-------------------------|-------------------------|-------------------|
| 23  | H2104 <sup>1</sup>                   | 1.4         | 9.0                                 | 29.1                                 | 1459                    | 1333                    | 3P/3              |
| 24  | INSTANT-<br>LOK 34-2789 <sup>2</sup> | 1.9         | 9.0                                 | 11.3                                 | 288                     | 280                     | 3P/3              |
| 25  | EASTOBOND<br>A-747S <sup>3</sup>     | 1.8         | 9.0                                 | 26.6                                 | 1158                    | 1017                    | 3P/3              |
| 26  | DURO-LAM<br>34-4295 <sup>2</sup>     | 2.4         | 9.0                                 | 11.3                                 | 435                     | 111                     | 3P/3              |

<sup>1</sup>Available from Findley Chemical

<sup>2</sup>Available from National Starch and Chemical Co.

<sup>3</sup>Available from Eastman Kodak

19 OCT 1996



-19-


What is Claimed is:

1. An improved envelope for transparencies for overhead projectors, said envelope comprising a substantially rectangular pocket of transparent sheet material, said pocket having two longitudinal side edges connected by shorter side edges, said pocket being open at least along one side edge for insertion of a transparency, at least one opaque flap attached in a foldable manner along one of said side edges by means of a flexible adhesive tape, said flap having a folded and an unfolded position, said tape comprising a flexible polyester backing having a thickness of less than 15 micrometers, and attached on one surface thereof, an adhesive layer, wherein said tape has a flexibility measurement of not more than 2.5 grams, and a 180° peel adhesion of at least 100 grams per centimeter, said flap being capable of remaining in the unfolded position on an overhead projector stage with minimal adhesive transfer to said stage at the operating temperature of the overhead projector.

2. An improved envelope according to claim 1 wherein said polyester backing is poly(ethylene terephthalate), said backing having a thickness of from 5 micrometers to 10 micrometers.

3. An improved envelope according to claim 1 wherein said adhesive is a rubber resin adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.



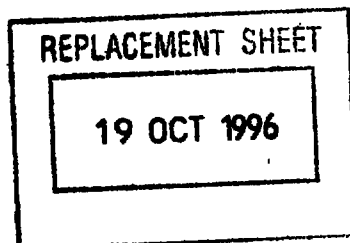


-20-

4. An improved envelope according to claim 3 wherein said adhesive is a tackified styrene-butadiene-styrene copolymer.
5. An improved envelope according to claim 1 wherein said adhesive is an acrylic adhesive comprising isooctyl acrylate and acrylic acid.
6. An adhesive tape suitable for use in an improved envelope for overhead transparencies according to claim 1, said envelope having at least one opaque flap, such tape comprising a flexible polyester backing material having a thickness of less than 15 micrometers, and coated on one surface of said backing is a flexible adhesive layer wherein said tape has a flexibility measurement of not more than 2.5 grams, and a 180° peel adhesion of at least 100 grams per centimeter, wherein said tape will exhibit minimal transfer to an overhead projector stage at the operating temperature of the overhead projector.
7. An adhesive tape according to claim 6 wherein said backing material comprises polyethylene terephthalate, and said adhesive layer comprises a rubber type adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.
8. An adhesive tape according to claim 6 wherein said adhesive is an acrylic adhesive comprising isooctyl acrylate and acrylic acid.

This Sheet Has Been Replaced





-21-

9. An adhesive tape according to claim 6 wherein said tape has a thickness less than 90 micrometers, wherein said backing comprises from 5 to 15 micrometers.

- 5      10. An adhesive tape according to claim 6 wherein said tape has a thickness less than 25 micrometers, wherein said backing comprises from 5 to 10 micrometers.

---

This Sheet Has Been Replaced



19 OCT 1996



- 22 -

## AMENDED CLAIMS

[received by the International Bureau on 24 March 1993(24.03.93);  
original claims 1 and 6 amended; remaining claims unchanged (2 pages)]


1. An improved envelope for transparencies for  
overhead projectors, said envelope comprising a  
5 substantially rectangular pocket of transparent sheet  
material, said pocket having two longitudinal side edges  
connected by shorter side edges, said pocket being open  
at least along one side edge for insertion of a  
transparency, at least one opaque flap having light  
10 scattering, light blocking or light reflecting properties  
such that a majority of light entering said flap is not  
transmitted therethrough, said flap being attached in a  
foldable manner along one of said side edges by means of  
a flexible adhesive tape, said flap having a folded an  
15 unfolded position, said tape comprising a flexible  
polyester backing having a thickness of less than 15  
micrometers, and attached on one surface thereof, an  
adhesive layer, wherein said tape has a flexibility  
measurement of not more than 2.5 grams, and a 180° Peel  
20 adhesion of at least 100 grams per centimeter, said flap  
being capable of remaining in the unfolded position on an  
overhead projector stage with minimal adhesive transfer  
to said stage at the operating temperature of the  
overhead projector.

25

2. An improved envelope according to claim 1 wherein  
said polyester backing is poly(ethylene terephthalate),  
said backing having a thickness of from 5 micrometers to  
10 micrometers.

30

3. An improved envelope according to claim 1  
wherein said adhesive a rubber resin adhesive selected  
from the group consisting of natural rubber, styrene-  
butadiene and styrene-butadiene-styrene copolymers and  
35 hydrogenated copolymers thereof, polybutadiene,  
polyisoprene, polyisobutylene, butyl rubbers,  
polychloroprene, ethylene-propylene copolymer rubbers,  
ethylene-propene-diene rubbers, and mixtures thereof.

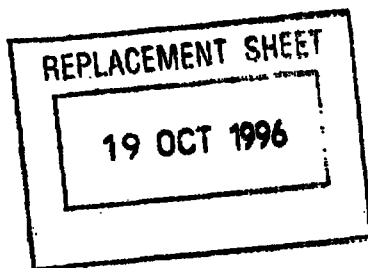


4. An improved envelope according to claim 3 wherein said adhesive is a tackified styrene-butadiene-styrene copolymer.
5. An improved envelope according to claim 1 wherein said adhesive is an acrylic adhesive comprising isooctyl acrylate and acrylic acid.
6. An adhesive tape suitable for use in an improved envelope for overhead transparencies, having at least one opaque flap having light scattering, light blocking or light reflecting properties such that a majority of light entering said flap is not transmitted therethrough, such tape comprising a flexible polyester backing material having a thickness of less than about 15 micrometers, and coated on one surface of said backing is a flexible adhesive layer wherein said tape has a flexibility measurement of not more than about 2.5 grams, and a 180° peel adhesion of at least about 100 grams per centimeter, wherein said tape will exhibit minimal transfer to an overhead projector stage at the operating temperature of the overhead projector.
7. An adhesive tape according to claim 6 wherein said backing material comprises polyethylene terephthalate, and said adhesive layer comprises a rubber type adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.
8. An adhesive tape according to claim 6 wherein said adhesive is an acrylic adhesive comprising isooctyl acrylate and acrylic acid.

- 24 -

## ENVELOPE FOR TRANSPARENCY HAVING INCREASED FLEXIBILITY

ABSTRACT OF THE DISCLOSURE

An improved envelope for transparencies for overhead projectors comprising a substantially rectangular pocket made of a transparent sheet material, the pocket having two longitudinal side edges connected by shorter side edges, and being open at least along one side edge for insertion of a transparency, at least one opaque flap attached in a foldable manner along one of the side edges by means of a flexible adhesive tape, the tape comprising a flexible polyester backing having a thickness of from 5 to 15 micrometers, and coated on one surface of the backing is an adhesive layer, wherein the tape has a flexibility measurement of 1.8 grams, and the flap is capable of remaining in the unfolded position on an overhead projector stage with minimal adhesive transfer at the operating temperature of the overhead projector.



This Sheet Has Been Replaced





THIS SHEET HAS BEEN  
REPLACED

1

CLAIMS


| REPLACEMENT SHEETS                             |                                            | SC |
|------------------------------------------------|--------------------------------------------|----|
| <input type="checkbox"/> Description :         | paged ..... to paged .....                 |    |
| <input checked="" type="checkbox"/> Claim(s) : | paged $\frac{1}{2}$ to paged $\frac{1}{2}$ |    |
| <input type="checkbox"/> Drawing(s) :          | paged ..... to paged .....                 |    |
| <input type="checkbox"/> Abstract :            | paged ..... to paged .....                 |    |
| DATE OF RECEIPT ..... 10/1/77 .....            |                                            |    |

What is claimed is:

1. An improved envelope for transparencies for overhead projectors, said envelope comprising a substantially rectangular pocket of transparent sheet material, said pocket having two longitudinal side edges connected by shorter side edges, said pocket being open at least along one side edge for insertion of a transparency, at least one opaque flap attached in a foldable manner along one of said side edges by means of a flexible adhesive tape, said flap having a folded and an unfolded position, said tape comprising a flexible polyester backing having a thickness of less than about 15 micrometers, and attached on one surface thereof, an adhesive layer, wherein said tape has a flexibility measurement of not more than about 2.5 grams, and a 180° peel adhesion of at least about 100 grams per centimeter, said flap being capable of remaining in the unfolded position on an overhead projector stage with minimal adhesive transfer to said stage at the operating temperature of the overhead projector.
2. An improved envelope according to claim 1 wherein said tape has a flexibility measurement of no more than 1.6 grams.
3. An improved envelope according to claim 1 wherein said tape has a 180° Peel adhesion of at least about 150 grams per centimeter.
4. An improved envelope according to claim 1 wherein said polyester backing is poly(ethylene terephthalate).
5. An improved envelope according to claim 1 wherein said polyester backing has a thickness of from about 5 micrometers to about 10 micrometers.

This Sheet Has Been Replaced



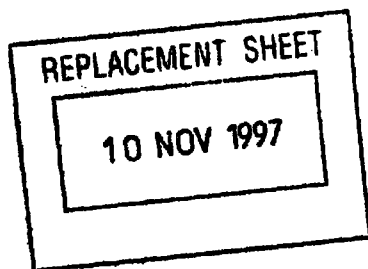

THIS SHEET HAS BEEN  
REPLACED

2

6. An improved envelope according to claim 1 wherein said adhesive is a rubber resin adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.

7. An improved envelope according to claim 4 wherein said adhesive is a tackified styrene-butadiene-styrene copolymer.

8. An improved envelope according to claim 1 wherein said adhesive is an acrylic adhesive.

9. An improved envelope according to claim 8 wherein said adhesive comprises isooctyl acrylate and acrylic acid.

This Sheet Has Been Replaced





- 19 -

## CLAIMS

What is claimed is:

1. An improved envelope for transparencies for overhead projectors, said envelope comprising a substantially rectangular pocket of transparent sheet material, said pocket having two longitudinal side edges connected by shorter side edges, said pocket being open at least along one side edge for insertion of a transparency, at least one opaque flap attached in a foldable manner along one of said side edges by means of a flexible adhesive tape, said flap having a folded and an unfolded position, said tape comprising a flexible polyester backing having a thickness of less than about 15 micrometers, and attached on one surface thereof, an adhesive layer, wherein said tape has a flexibility measurement of not more than about 2.5 grams, and a 180° peel adhesion of at least about 100 grams per centimeter, said flap being capable of remaining in the unfolded position on an overhead projector stage with minimal adhesive transfer to said stage at the operating temperature of the overhead projector.
2. An improved envelope according to claim 1 wherein said tape has a flexibility measurement of no more than 1.6 grams.
3. An improved envelope according to claim 1 wherein said tape has a 180° Peel adhesion of at least about 150 grams per centimeter.
4. An improved envelope according to claim 1 wherein said polyester backing is poly(ethylene terephthalate).
5. An improved envelope according to claim 1 wherein said polyester backing has a thickness of from about 5 micrometers to about 10 micrometers.

| REPLACEMENT SHEETS                   |                           | SG             |
|--------------------------------------|---------------------------|----------------|
| <input type="checkbox"/>             | Description : paged ..... | to paged ..... |
| <input checked="" type="checkbox"/>  | Claim(s) : paged .....    | to paged ..... |
| <input type="checkbox"/>             | Drawing(s) : paged .....  | to paged ..... |
| <input checked="" type="checkbox"/>  | Abstract : paged .....    | to paged ..... |
| DATE OF RECEIPT <u>15/1/98</u> ..... |                           |                |



6. An improved envelope according to claim 1 wherein said adhesive is a rubber resin adhesive selected from the group consisting of natural rubber, styrene-butadiene and styrene-butadiene-styrene copolymers and hydrogenated copolymers thereof, polybutadiene, polyisoprene, polyisobutylene, butyl rubbers, polychloroprene, ethylene-propylene copolymer rubbers, ethylene-propene-diene rubbers, and mixtures thereof.

7. An improved envelope according to claim 4 wherein said adhesive is a tackified styrene-butadiene-styrene copolymer.

8. An improved envelope according to claim 1 wherein said adhesive is an acrylic adhesive.

9. An improved envelope according to claim 8 wherein said adhesive comprises isooctyl acrylate and acrylic acid.

REPLACEMENT SHEET

15 APR 1998

ENVELOPE FOR TRANSPARENCY HAVING INCREASED FLEXIBILITY

ABSTRACT OF THE DISCLOSURE

An improved envelope for transparencies for overhead projectors comprising a substantially rectangular pocket made of a transparent sheet material, the pocket having two longitudinal side edges connected by shorter side edges, and being open at least along one side edge for insertion of a transparency, at least one opaque flap attached in a foldable manner along one of the side edges by means of a flexible adhesive tape, the tape comprising a flexible polyester backing having a thickness of from 5 to 15 micrometers, and coated on one surface of the backing is an adhesive layer, wherein the tape has a flexibility measurement of 1.8 grams, and the flap is capable of remaining in the unfolded position on an overhead projector stage with minimal adhesive transfer at the operating temperature of the overhead projector.

