

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 November 2007 (08.11.2007)

PCT

(10) International Publication Number
WO 2007/125163 A1

(51) International Patent Classification:

E05B 47/00 (2006.01) *E05B 47/06* (2006.01)
E05B 47/02 (2006.01)

(21) International Application Number:

PCT/FI2007/050215

(22) International Filing Date: 23 April 2007 (23.04.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

20065281 2 May 2006 (02.05.2006) FI

(71) Applicant (for all designated States except US): **ABLOY OY** [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RAATIKAINEN, Juha** [FI/FI]; Miilunpolttajantie 7, FI-80160 Joensuu (FI).

(74) Agent: **AWEK INDUSTRIAL PATENTS LTD OY**; P.O. Box 230 (Lautatarhankatu 6), FI-00101 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: LOCK BODY

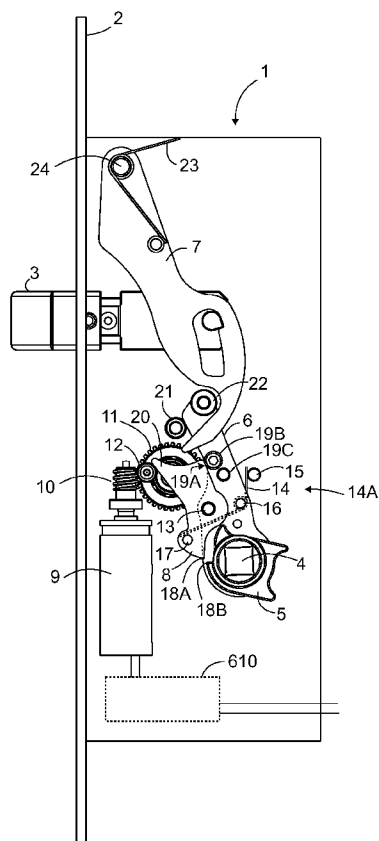

(57) Abstract: A lock body (1) according to the invention comprising a bolt (3) and a follower (6) that is functionally connectable with the bolt (3) to control the position of the bolt, and a driver (5). The driver is connectable with the follower to convey force turning the driver to the follower. Furthermore, the lock body comprises an electric motor (9) to operate as a power source for changing the locking state of the lock body.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*