

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
02 January 2025 (02.01.2025)



(10) International Publication Number
WO 2025/003927 A1

(51) International Patent Classification:
F16K 27/00 (2006.01) *H01L 21/67* (2006.01)

(21) International Application Number:
PCT/IB2024/056238

(22) International Filing Date:
26 June 2024 (26.06.2024)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/523,163 26 June 2023 (26.06.2023) US

(71) Applicant: **COMPART SYSTEMS PTE. LTD.** [SG/SG];
7 Temasek Boulevard, #32-01 Suntec Tower One, Singa-
pore 038987 (SG).

(72) Inventors: **VU, Kim N.**; 5605 Vista Del Mar, Yorba Lin-
da, California 92887 (US). **LANTZ, John**; 9419 Hunters

Creek Drive, Dallas, Texas 75243 (US). **REZAEI, Freder-
ick**; 1334 East Chandler Blvd., Suite S-D-42, Phoenix, Ari-
zona 85048 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,

(54) Title: FLUID DELIVERY SYSTEM COMPRISING A MODULAR FLOW SUBSTRATE

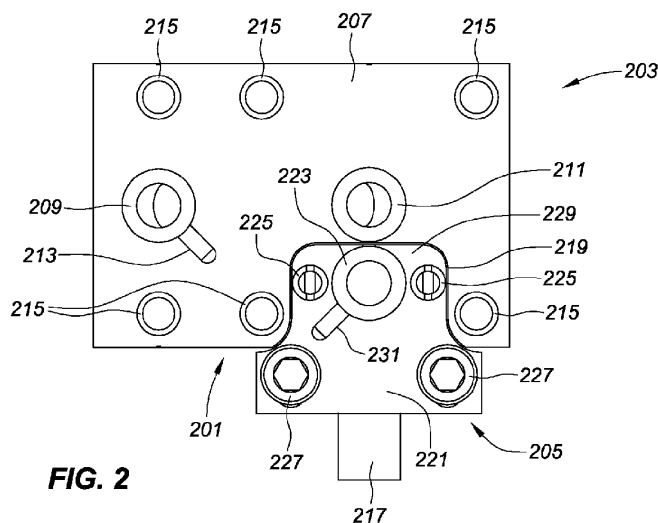


FIG. 2

(57) Abstract: A delivery system can comprise a modular flow substrate comprising an i-Block (203) and an i-Bridge (205). The i-Block (203) can comprise a first i-Block conduit port (209), a second i-Block conduit port (211), a plurality of mounting apertures (215), a connection depression (219), at least one i-Block connection aperture and a fluid pathway extending between the first i-Block conduit port and the second i-Block conduit port. The i-Bridge (205) can comprise an i-Bridge conduit port (223), a manifold connection conduit port, at least one connection aperture (225), at least one mounting aperture (227), a connection protrusion (229), and a fluid pathway extending between the i-Bridge conduit port and the manifold connection conduit port. The connection protrusion can be sized and configured to fit within the connection depression of the i-Block.

[Continued on next page]

SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*