



(51) International Patent Classification:
H04W 36/08 (2009.01)

(21) International Application Number:
PCT/EP2024/072336

(22) International Filing Date:
07 August 2024 (07.08.2024)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
23190905.2 10 August 2023 (10.08.2023) EP

(71) Applicant: PANASONIC INTELLECTUAL PROPERTY CORPORATION OF AMERICA [US/US]; 2050 W 190th Street Suite 450, Torrance, California 90504 (US).

(72) Inventors: KUANG, Quan; c/o Panasonic R&D Center Germany GmbH, Monzastrasse 4c, 63225 Langen (DE). SUZUKI, Hidetoshi; c/o Panasonic Holdings Corpora-

tion , 1006, Oaza Kadoma, Kadoma-shi, Osaka, 571-8501 (JP). ZEINEDDINE, Khalid; c/o Panasonic R&D Center Germany GmbH, Monzastrasse 4c, 63225 Langen (DE). LI, Hongchao; c/o Panasonic R&D Center Germany GmbH, Monzastrasse 4c, 63225 Langen (DE).

(74) Agent: GRÜNECKER PATENT- UND RECHTSANWÄLTE PARTG MBB; Leopoldstr. 4, 80802 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

(54) Title: TCI STATE OPERATION FOR L1L2 TRIGGERED MOBILITY

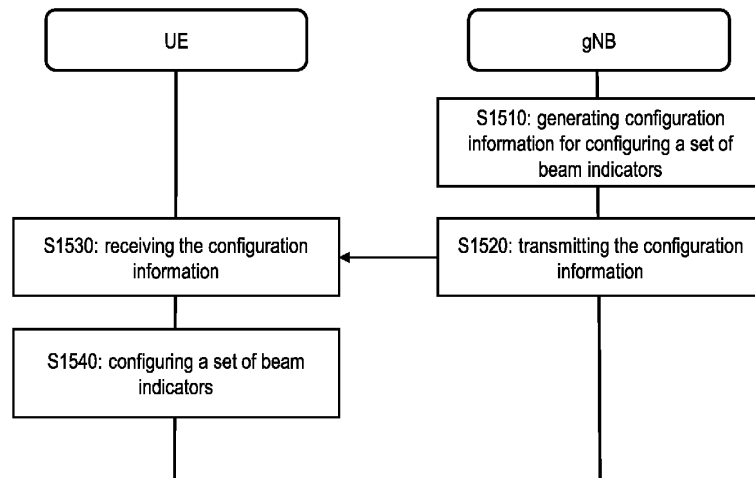


Fig. 15

(57) **Abstract:** The present invention relates to a user equipment, UE, comprising the following. A transceiver of the UE receives configuration information for configuring a set of beam indicators, wherein the set of beam indicators includes at least one first beam indicator and at least one second beam indicator, wherein the at least one first beam indicator indicates one or more beams, which can be used for signal transmission and/or signal reception in a serving cell, which is serving the UE, and wherein the at least one second beam indicator indicates one or more candidate beams, which can be used for signal transmission and/or a signal reception after a cell-switch from the serving cell to a target candidate cell, which is one out of one or more candidates for participating in mobility for the UE. A processing circuitry of the UE configures the set of beam indicators obtained from the configuration information.

[Continued on next page]

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE