



(51) International Patent Classification:
F28D 15/00 (2006.01)

(21) International Application Number:
PCT/US2011/022287

(22) International Filing Date:
24 January 2011 (24.01.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/297,800 24 January 2010 (24.01.2010) US

(71) Applicant (for all designated States except US): **OY HALTON GROUP LTD.** [FI/FI]; Esterinportti 2, FI-00240 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BAGWELL, Rick, A.** [US/US]; 3262 Bowling Green Road, Scottsville, KY 42164 (US). **SUMMANEN, Janne** [FI/FI]; Esterinportti 2, FI-00240 Helsinki (FI). **LIVCHAK, Andrey, V.** [US/US]; 706 Newbury Street, Bowling Green, KY 42103 (US).

(74) Agents: **CATAN, Mark A. Esq.** et al.; MILES & STOCKBRIDGE P.C., 1751 Pinnacle Drive, Suite 500, Mclean, VA 22102-3833 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CHILLED BEAM DEVICES, SYSTEMS, AND METHODS

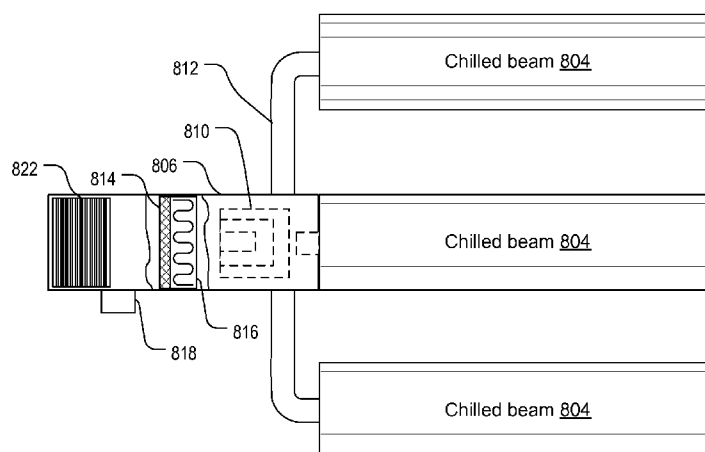


Fig. 10A

(57) Abstract: A chilled beam system may incorporate a terminal unit to provide additional heating and cooling capacity including latent cooling. In a system, terminal units may be distributed and connected to cooperate with a primary air stream from a central air handling unit. The chilled beam and/or terminal units may employ features for enhancing heating mode operation. Control embodiments take advantage of the additional capabilities described.