

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 May 2008 (15.05.2008)

PCT

(10) International Publication Number
WO 2008/056215 A2

(51) International Patent Classification:
E04G 23/02 (2006.01)

(21) International Application Number:
PCT/IB2007/003171

(22) International Filing Date: 23 October 2007 (23.10.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI 0604778-5 10 November 2006 (10.11.2006) BR

(71) Applicant (for all designated States except US): **HOLCIM TECHNOLOGY LTD.** [CH/CH]; Zürcherstraße 156, CH-8645 Jona (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VANDERLEI DE**

ABREU, José [BR/BR]; Rua Cel. Alfredo da Cunha Ribas, 197, Bairro Cidade de Sao Francisco, BR-Sao (BR).


(74) Agent: **HAFFNER UND KESCHMANN**; Patentanwälte OG, Schottengasse 3a, A-1014 Vienna (AT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: METHOD FOR THE TREATMENT OF FISSURES IN CONCRETE STRUCTURES

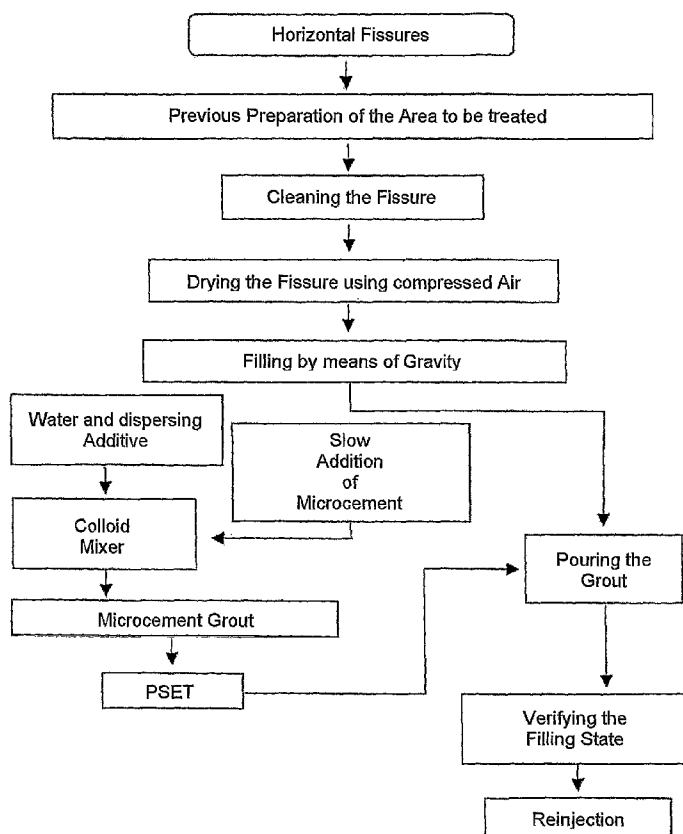

(57) Abstract: A method for the treatment of fissures in concrete structures by means of repairing them with microcement- based material, comprising a method wherein the fissures, both horizontal and vertical or inclined fissures, are identified and analyzed. The treatment of the mentioned horizontal fissures comprises cleaning them and drying their surface using compressed air and subsequently filling them by means of gravity, the grout being poured with the help of a "pset". The vertical or inclined fissures are treated by demarcating the sites for drilling and inserting the injector nozzles that permit cleaning and saturating the fissures with water, followed by the injection of the microcement grout under pressure.

WO 2008/056215 A2



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*